iiyama ProLite XUB2797UHSNP-B1 kompiuterio monitorius 68,6 cm (27") 3840 x 2160 pikseliai 4K Ultra HD LED Juoda

Gamintojas: **IIYAMA** · Modelis: **XUB2797UHSNP-B1** · EAN: **4948570123810** · Prekės kodas: **1002592**



394,90 €

Kaina su PVM

Be PVM: **326,36 €**

Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 68,6 cm (27") Juoda
- ✓ Aukščio reguliavimas 15 cm Įmontuoti garsiakalbiai
- ✓ USB aukštakrypčio prievado tipas: C tipo USB HDMI HDMI versija: 2.0 „DisplayPort“ kiekis: 1
- ✓ Ekrano forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 60 Hz Reakcijos laikas: 4 ms Atsako trukmės matavimo tipas: GTG (Gray to Gray)
- ✓ 3840 x 2160 pikseliai 4K Ultra HD Skydo tipas: IPS
- ✓ Energijos vartojimo efektyvumo klasė (SDR): F ErP, TCO CE, EAC, PSE, REACH, RoHS, TÜV mark, UKCA, VCCI, WEEE
- ✓ Garantinis laikotarpis: 5 metai

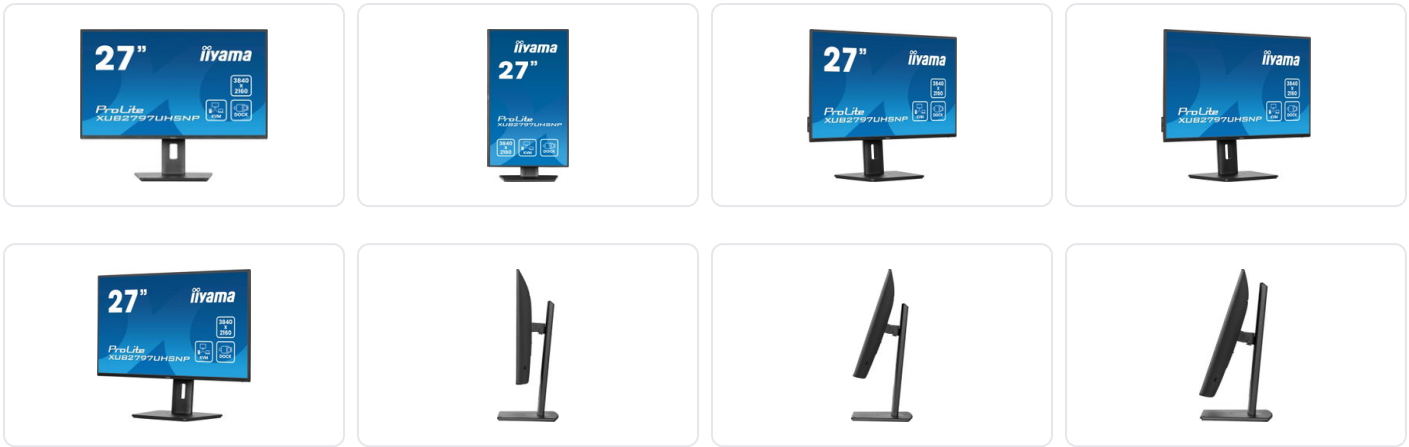






Aprašymas

Discover the XUB2797UHSNP, a 27’’ 4K IPS panel equipped with USB-C dock (96W PD), KVM switch, and RJ45 for LAN connectivity. The KVM switch allows to connect multiple computers through a single console. Get rid of cable clutter with the USB-C dock that carries all data (audio and video) whilst powering your notebook. Easily extend your desktop by creating a dual-monitor set-up with the DisplayPort output. Enjoy accurate colours and wide viewing angles thanks to the IPS panel. Benefit from exceptional performance for tasks like photography and web design, thanks to the 4K resolution and high contrast. The ergonomic stand offers a height adjustment of 150mm and tilt/swivel mechanisms for portrait mode, optimizing comfort while working with extensive data sheets

Techninė specifikacija

Display	
Display diagonal	68.6 cm (27")
Display resolution	3840 x 2160 pixels
Native aspect ratio	16:9
Display technology	LED
Touchscreen	No
HD type	4K Ultra HD
Panel type	IPS
Response time	4 ms
Screen shape	Flat
Contrast ratio (typical)	1300:1
Maximum refresh rate	60 Hz
Display number of colours	1.07 billion colours
Display brightness (typical)	350 cd/m²
Response time measurement type	GTG (Gray to Gray)
Display surface	Matt
Contrast ratio (dynamic)	80000000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Pixel pitch	0.155 x 0.155 mm
Horizontal scan range	30 - 140 kHz
Viewable size, horizontal	59.7 cm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Viewable size, vertical	33.6 cm
Display diagonal (metric)	68.5 cm
DDC/CI	Yes
Colour depth	8 bit
Colour gamut standard	NTSC, sRGB
sRGB coverage (typical)	99%
NTSC coverage (typical)	72%
Performance	
Flicker-free technology	Yes
Low Blue Light technology	Yes
Multimedia	
Built-in speaker(s)	Yes
Number of speakers	2
RMS rated power	4 W
Design	
Market positioning	Business
Product colour	Black
Ports & interfaces	
Built-in USB hub	Yes
HDMI	Yes
Headphone out	Yes
USB hub version	3.2 Gen 1 (3.1 Gen 1)
USB upstream port type	USB Type-C
Number of downstream ports	4
Number of USB Type-C upstream ports quantity	1
USB Power Delivery (USB PD)	Yes
USB Power Delivery up to	96 W
HDMI ports quantity	1
HDMI version	2
DisplayPorts quantity	1
DisplayPort out quantity	1
DisplayPort out version	1.2
Built-in KVM switch	Yes
HDCP	Yes

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Network	
Ethernet LAN	Yes
Ergonomics	
VESA mounting	Yes
Cable lock slot	Yes
Height adjustment	Yes
Panel mounting interface	100 x 100 mm
Wall mountable	Yes
Cable management	Yes
Cable lock slot type	Kensington
Adjustable height (max)	15 cm
Pivot	Yes
Pivot angle	90 - 90°
Swivelling	Yes
Swivel angle range	-45 - 45°
Tilt adjustment	Yes
Tilt angle range	23 - 5°
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	Czech, German, English, Spanish, French, Italian, Japanese, Dutch, Polish, Russian
Power	
Energy efficiency class (SDR)	F
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	26 kWh
Power consumption (typical)	33 W
Power consumption (standby)	0.5 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Power supply type	Internal
Energy efficiency scale	A to G
Weight & dimensions	
Width (with stand)	614.5 mm
Depth (with stand)	209.5 mm
Height (with stand)	547.5 mm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Weight (with stand)	6.7 kg
Width (without stand)	614.5 mm
Depth (without stand)	209.5 mm
Height (without stand)	397.5 mm
Packaging data	
Package width	688 mm
Package depth	138 mm
Package height	463 mm
Package weight	9.2 kg
Package type	Box
Packaging content	
Cables included	AC, USB, HDMI, DisplayPort, USB Type-C
Quick start guide	Yes
Sustainability	
Sustainability certificates	ErP, TCO
Other features	
Packaging content	quick start guide, safety guide
Weight	6.7 kg
Width	614.5 mm
Depth	209.5 mm
Warranty period	5 year(s)
Compliance certificates	CE, EAC, PSE, REACH, RoHS, TÜV mark, UKCA, VCCI, WEEE
Manufacturer warranty	5 years (for details and eligible countries please check the Warranty section of our website)
Ethernet LAN (RJ-45) ports	1
User controls	picture adjust (brightness, contrast, Eco, ACR, OD, X-Res Technology, DPS), colour settings (6-Axis, i-Style colour, blue light reducer, gamma, RGB range, colour temp., user preset), PiP/PbP (sub source, PiP position, PiP size, swap), OSD (OSD H. position, OSD V. position, OSD rotate, OSD time, OSD background, DDC/CI, display information), language, recall, miscellanous (sharp and soft, video mode adjust, opening logo, LED, USB BC, MST, USB C, MAC Adress), KVM, input select (source), audio settings (volume, mute, input)
Control panel	Joystick/Power: Up/Input Select, Down, Right/Volume/Mute, Left/Submenu / Shortcut, Input / Exit
Matmenys ir svoris	
Matmenys (I × P × A)	69,00cm × 14,00cm × 46,00cm

Energijos efektyvumas ir ekologinis projektavimas

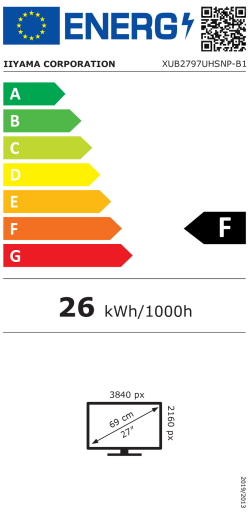

Energijos efektyvumo klasė **F** A–G

- Energijos etiketė
- Gaminio informacijos lapas
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- Naudojimo instrukcija
- Gaminio lankstinukas
- Vaizdo įrašas youtube.com/watch?v=ai3C_61lul8

Gamintojo ir saugos informacija

GAMINTOJAS

iiyama International
Wijkermeerstraat 8, 2131 HA Hoofddorp, NL
iiyama.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt