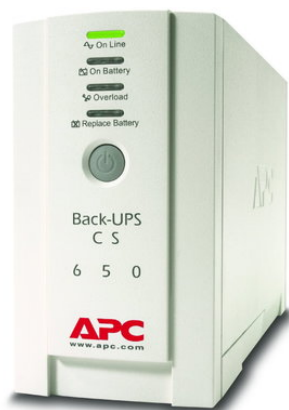


APC Back-UPS nepertraukiamo maitinimo resursai (UPS) Budėjimo režimas (neprisijungus) 0,65 kVA 400 W 4 AC išvestis(ys / čių)

 Gamintojas: **APC** · Modelis: **BK650EI** · EAN: **731304219781** · Prekės kodas: **100772**


222,89 €

Kaina su PVM

 Be PVM: **184,21 €**


Sandėlyje


Prekė internetu

 Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Budėjimo režimas (neprisijungus)
- ✓ 0,65 kVA 400 W
- ✓ Signalų forma: Sinusas
- ✓ 4 AC išvestis(ys / čių)
- ✓ Rūgštinis akumuliatorius (VRLA) 12 V 9 Ah
- ✓ Tower Rusvai gelsvas



Aprašymas

Security through emergency power

An APC Back-UPS has a built-in battery that ensures that all connected equipment, such as a NAS, router, modem and media box, continues to work if the power goes out. In addition, this APC emergency power supply can also automatically shut down a NAS or PC in time via the USB connection. Useful when the APC ups is almost empty. This prevents downtime, damage to equipment, and loss of data.

Safety

In addition, this safe APC Back-UPS protects valuable equipment against peak voltage caused by lightning strikes, for example.

Insurance

Despite the high risk of lightning strikes and surges, APC has full confidence in its products and offers this APC Back-UPS:

- Equipment protection policy of 100,000 euros

Extend the lifespan

The internal battery cartridge (RBC17) can be replaced easily, safely and independently by the user. This way you can easily and cheaply extend the lifespan of the APC Back-UPS BK650EI.

Warranty extension

The factory warranty of the BK650EI is 2 years and you can upgrade to 5 years with the APC service pack (WBEXTWAR3YR-SP-01A).

The re-invention of the most relied upon desktop UPS in history: the Back-UPS!

The Back-UPS CS provides professional-grade power protection for office and home office systems. Battery powered & surge protected power outlets, built-in phone/fax/modem line (DSL compatible) protection, safe system shutdown software with sophisticated power management features and pro-active audio-visual status indicators ensure office systems and their valuable data are protected from dangerous power surges, spikes and blackouts. Serial or USB connectivity gives users more flexibility making installation quicker and easier. Easy access to a hot-swappable, user-replaceable battery also makes servicing the Back-UPS CS hassle-free. These features along with its classic styling make the Back-UPS CS a perfect choice for protecting your important office and home office systems.

Techninė specifikacija

Features	
UPS topology	Standby (Offline)
Output power capacity	0.65 kVA
Output power	400 W
Waveform	Sine
Input operation voltage (min)	160 V
Input operation voltage (max)	286 V
Input frequency	50/60 Hz
Output frequency regulation	47 - 63 Hz
Maximum current	7 A
Surge energy rating	310 J
Hold time (min)	6 ms
Hold time (max)	10 ms
Efficiency	98.9%
Noise level	45 dB
Surge protection	Yes
Surge protection features	Digital Subscriber Line (DSL), Fax, Modem, Telephone
Audible alarm(s)	Yes

Audible alarm modes	Low battery alarm, Overload alarm
Ports & interfaces	
AC outlet types	C13 coupler
Power plug	C14 coupler
AC outlets quantity	4 AC outlet(s)
Number of output IEC jumpers	2
USB port	Yes
SmartSlot	No
SmartConnect port	No
Battery	
Battery technology	Sealed Lead Acid (VRLA)
Battery capacity	9 Ah
Battery capacity	111 VAh
Battery voltage	12 V
Typical backup time at full load	4.7 min
Typical backup time at half load	14.7 min
Battery life (max)	6 year(s)
Battery recharge time	8 h
Automatic battery test	Yes
Replacement battery cartridge	1
Design	
Form factor	Tower
Product colour	Beige
Cable length	1.8 m
LED indicators	Yes
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	5 - 95%
Storage relative humidity (H-H)	5 - 95%
Operating altitude	0 - 3048 m
Non-operating altitude	0 - 15240 m
Certificates	
Compliance certificates	RoHS

Certification	A-tick, C-tick, CE, GOST, NEMKO
Packaging content	
Cables included	USB cable
Management card included	No
Quick installation guide	Yes
Sustainability	
Sustainability certificates	ENERGY STAR
Weight & dimensions	
Width	91 mm
Depth	284 mm
Height	165 mm
Weight	6.03 kg
Packaging data	
Software CD	Yes
Bundled software	PowerChute Serial Edition
Package width	185 mm
Package depth	415 mm
Package height	494 mm
Package weight	7.31 kg
Logistics data	
Products per pallet	48 pc(s)
Harmonized System (HS) code	85078000
Products per master (outer) case	1 pc(s)
Other features	
Nominal output voltage	230 V
Nominal input voltage	230 V
Filtering	Yes
Packaging content	Detachable IEC C13 to IEC C14 power cords
Matmenys ir svoris	
Matmenys (I × P × A)	42,00cm × 24,00cm × 19,00cm
Svoris	7,30kg

Dokumentai ir vaizdo įrašai

- › Naudojimo instrukcija
- › Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

Schneider Electric SE

rue Joseph Monier 35, 92500 RUEIL MALMAISON, FR

se.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt