
APC Smart-UPS SMT1500IC - 8x C13, USB, SmartConnect, 1500VA

Gamintojas: **APC** · Modelis: **SMT1500IC** · EAN: **731304332992** · Prekės kodas: **100837**

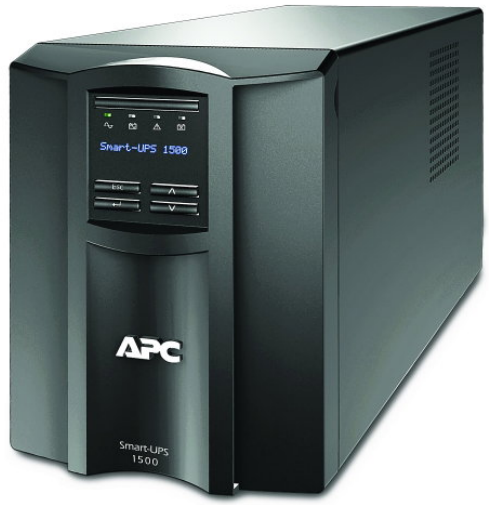

943.90€

Kaina su PVM

Be PVM: **780.08€**

In Stock


Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Line-Interactive
- ✓ 1.5 kVA 1000 W
- ✓ Waveform: Sine
- ✓ 8 AC outlet(s)
- ✓ Sealed Lead Acid (VRLA)
- ✓ Mini Tower Black

















Aprašymas

Stay always online and prevent data loss

As soon as the power goes out, an APC Smart-UPS immediately provides emergency power to all connected equipment. Because an APC UPS does this automatically, you prevent unwanted failure of, for example, a PC, server or switch. With the free APC PowerChute software you can even have

critical IT hardware shut down automatically and in a controlled manner when the battery of the UPS is almost empty. This way you prevent data loss, downtime and physical damage to hardware.

Safety

In addition, a Smart-UPS protects connected devices against peak voltage caused by lightning, among other things. This APC emergency power supply is ideally suited for (small) business use.

Battery life

You can easily read the expected battery life in the runtime graph, which you can find between the product images. You can easily see how long the UPS supplies emergency power at a certain load.

SmartConnect

Out-of-box remote UPS monitoring, free for a 6-month trial period. Using the SmartConnect ethernet port, you can easily connect the Smart-UPS to your network and easily monitor it remotely via the secure APC SmartConnect cloud-based web portal*. In addition, the UPS can always be monitored via this port via EcoStruxure IT Expert (SFTWES1-DIGI).

* Extend access to SmartConnect through the following licenses:
1 year Standard Plan: ERWPMON1-1Y-DIGI
3 year Standard Plan: ERWPMON1-3Y-DIGI

1 year Advanced Plan: ERWPLUS1-1Y-DIGI
3 year Advanced Plan: ERWPLUS1-3Y-DIGI

PowerChute

By connecting the UPS to a maximum of one server via a USB cable, it can automatically provide it with a shutdown signal during a prolonged power outage and thus prevent a hard shutdown. This exact moment can be set via the free APC PowerChute Serial Edition software.

Network Management Card

If you connect the UPS directly to your network via the optional APC Network Management Card (AP9640/AP9641), it can easily be managed remotely via SNMP or our remote management software Ecostruxure IT Expert (SFTWES1-DIGI). You can also automatically send a shutdown signal via the network to multiple physical and/or virtual servers. By means of the APC PowerChute Network Shutdown Software associated with the network card can even be differentiated in the shutdown moment and the order in which this happens.

Ease of use

By means of physical buttons and an LCD screen make it possible to set and read the basic functionalities.

Extend the lifespan

The internal battery cartridge (RBC7) can be replaced easily, safely and independently by the user. This without having to switch off the APC SMT1500IC or connected equipment. This way you can easily and cheaply extend the lifespan of the APC Smart-UPS and your equipment always remains online.

Warranty extension

The manufacturer's warranty of the SMT1500IC is 3 years, with the exception of the battery cartridge, which has a 2-year manufacturer's warranty. Both are extended by 3 years to 6 and 5 years respectively with the APC service pack (WBEXTWAR3YR-SP-03).

Switched Outlet Groups: Remote reboot and phased start-up

Thanks to the Switched Outlet Groups, it is possible to configure a phased/delayed power-on per UPS outlet group. This reduces the peak load on the UPS and brings it closer to the constant load, which limits oversizing of the UPS.

It is also possible to reset a group of multiple UPS outputs and the equipment connected to them. If SmartConnect Advanced (ERWPLUS1-1Y-DIGI) is used, a UPS with SmartConnect port + Ecostruxure IT Expert (SFTWES1-DIGI) or a network card (ap9640) in combination with Ecostruxure IT Expert (SFTWES1-DIGI), this is even possible at a distance.

Techninė specifikacija

Features	
UPS topology	Line-Interactive
Output power capacity	1.5 kVA
Output power	1000 W
Waveform	Sine
Input operation voltage (min)	151 V
Input operation voltage (max)	302 V
Input frequency	50/60 Hz
Output operation voltage (min)	220 V
Output operation voltage (max)	240 V
Output frequency	50/60 Hz
Automatic Voltage Regulation (AVR)	Yes
Surge energy rating	459 J
Output voltage Total Harmonic Distortion (THD)	5%
Noise level	45 dB
Surge protection	Yes
Audible alarm(s)	Yes
Web-based management	Yes
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm
Auto-restart	Yes
Temperature voltage compensation	Yes
Ports & interfaces	
AC outlet types	C13 coupler, IEC Jumpers
Power plug	C14 coupler
AC outlets quantity	8 AC outlet(s)
USB port	Yes
USB 2.0 ports quantity	1

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Serial interface	Yes
Serial interface type	RS-232
Serial ports quantity	1
Ethernet LAN (RJ-45) ports	1
SmartSlot	Yes
SmartConnect port	Yes

Battery

Battery technology	Sealed Lead Acid (VRLA)
Battery life (max)	5 year(s)
Battery recharge time	3 h
Hot-swap battery	Yes
Automatic battery test	Yes
Cold start	Yes

Design

Form factor	Mini Tower
Product colour	Black
Cable length	1.83 m
Display type	LCD
LED indicators	Yes

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Non-operating altitude	0 - 15000 m

Certificates

Compliance certificates	RoHS
Certification	CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, UL 1778, VDE

Packaging content

Cables included	RS-232, USB cable
Management card included	No
Quick installation guide	Yes

Sustainability

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Sustainability certificates	Green Premium
Weight & dimensions	
Width	171 mm
Depth	439 mm
Height	219 mm
Weight	24.1 kg
Packaging data	
Resource CD	Yes
Software CD	Yes
Package width	328 mm
Package depth	595 mm
Package height	376 mm
Package weight	27.2 kg
Logistics data	
Products per pallet	12 pc(s)
Harmonized System (HS) code	85078000
Total carbon footprint (kg of CO2e)	1270.81
Matmenys ir svoris	
Matmenys (I × P × A)	60.00cm × 34.00cm × 34.00cm
Svoris	26.78kg

Gamintojo ir saugos informacija

MANUFACTURER

Schneider Electric SE
rue Joseph Monier 35, 92500 Rueil Malmaison, FR
se.com

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt