
APC SMT1000IC nepertraukiamo maitinimo resursai (UPS) „Line-Interactive“ 1 kVA 700 W 8 AC išvestis(ys / čių)

Gamintojas: **APC** · Modelis: **SMT1000IC** · EAN: **731304332978** · Prekės kodas: **100838**

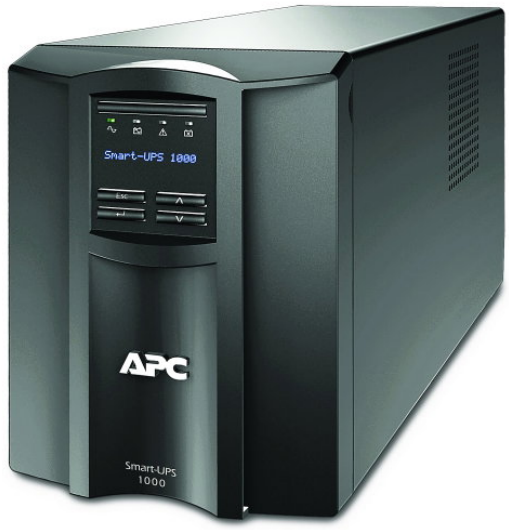

728,90 €

Kaina su PVM

Be PVM: **602,40 €**

Sandėlyje


Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ „Line-Interactive“
- ✓ 1 kVA 700 W
- ✓ Signalų forma: Sinusas
- ✓ 8 AC išvestis(ys / čių)
- ✓ Rūgštinis akumuliatorius (VRLA)
- ✓ „Mini Tower“ Juoda

















Aprašymas

Stay always online and prevent data loss

As soon as the power goes out, an APC Smart-UPS immediately provides emergency power to all connected equipment. Because an APC UPS does this automatically, you prevent unwanted failure of, for example, a PC, server or switch. With the free APC PowerChute software you can even have critical IT hardware shut down automatically and in a controlled manner when the battery of the UPS is almost empty. This way you prevent data loss, downtime and physical damage to hardware.

Safety

In addition, a Smart-UPS protects connected devices against peak voltage caused by lightning, among other things. This APC emergency power supply is ideally suited for (small) business use.

Battery life

You can easily read the expected battery life in the runtime graph, which you can find between the product images. You can easily see how long the UPS supplies emergency power at a certain load.

SmartConnect

Out-of-box remote UPS monitoring, free for a 6-month trial period. Using the SmartConnect ethernet port, you can easily connect the Smart-UPS to your network and easily monitor it remotely via the secure APC SmartConnect cloud-based web portal*. In addition, the UPS can always be monitored via this port via EcoStruxure IT Expert (SFTWES1-DIGI).

* Extend access to SmartConnect through the following licenses:
1 year Standard Plan: ERWPMON1-1Y-DIGI
3 year Standard Plan: ERWPMON1-3Y-DIGI

1 year Advanced Plan: ERWPLUS1-1Y-DIGI
3 year Advanced Plan: ERWPLUS1-3Y-DIGI

PowerChute

By connecting the UPS to a maximum of one server via a USB cable, it can automatically provide it with a shutdown signal during a prolonged power outage and thus prevent a hard shutdown. This exact moment can be set via the free APC PowerChute Serial Edition software.

Network Management Card

If you connect the UPS directly to your network via the optional APC Network Management Card (AP9640/AP9641), it can easily be managed remotely via SNMP or our remote management software Ecostruxure IT Expert (SFTWES1-DIGI). You can also automatically send a shutdown signal via the network to multiple physical and/or virtual servers. By means of the APC PowerChute Network Shutdown Software associated with the network card can even be differentiated in the shutdown moment and the order in which this happens.

Ease of use

By means of physical buttons and an LCD screen make it possible to set and read the basic functionalities.

Extend the lifespan

The internal battery cartridge (RBC6) can be replaced easily, safely and independently by the user. This without having to switch off the APC SMT1000IC or connected equipment. This way you can easily and cheaply extend the lifespan of the APC Smart-UPS and your equipment always remains online.

Warranty extension

The manufacturer's warranty of the SMT1000IC is 3 years, with the exception of the battery cartridge, which has a 2-year manufacturer's warranty. Both are extended by 3 years to 6 and 5 years respectively with the APC service pack (WBEXTWAR3YR-SP-02).

Switched Outlet Groups: Remote reboot and phased start-up

Thanks to the Switched Outlet Groups, it is possible to configure a phased/delayed power-on per UPS outlet group. This reduces the peak load on the UPS and brings it closer to the constant load, which limits oversizing of the UPS.

It is also possible to reset a group of multiple UPS outputs and the equipment connected to them. If SmartConnect Advanced (ERWPLUS1-1Y-DIGI) is used, a UPS with SmartConnect port + Ecostruxure IT Expert (SFTWES1-DIGI) or a network card (ap9640) in combination with Ecostruxure IT Expert (SFTWES1-DIGI), this is even possible at a distance.

Included in the box
1x SMT1000IC
1x USB cable 2 meters
2x C13 to C14 power cord 2 meters
1x Software CD with PowerChute Business Edition
1x Cat5E ethernet cable
1x Documentation CD

Peace of mind that comes with full equipment compatibility and reliability of a leader

Provides pure sine wave output which is recommended by server manufacturers using active power factor corrected (PFC) power supplies. Safety agency tested and approved means that you can deploy Smart-UPS with confidence that they meet or exceed the industry’s most rigorous standards.

Smarter productivity with ability to tailor to your specific application needs

Intuitive LCD interface provides clear information with the ability to configure the UPS locally with easy to use navigation keys. Over 15 different programmable settings including switched outlet group control allow for application specific settings, thresholds and notifications.

Avoids costly power problems by keeping your IT equipment and data safe and available

Network grade power conditioning protects from damaging surges and disruptive noise. Solid state automatic voltage regulation boosts low input voltage up to 30% and trims high voltage up to 12% without battery operation. Reliable battery back-up capacity to power through outages or gracefully shutdown systems

Low operating and maintenance costs with high efficiency, proven reliability and intelligent battery management

Patented green operating mode achieves efficiencies over 97%. Smart-ups was the first network UPS to be Energy Star certified. Intelligent battery management, pioneered by APC, maximizes battery performance and life through intelligent, precision temperature compensated charging. Dynamic battery replacement date indicator and automatic self tests insure battery reliability and warn in advance of needing replacement. Convenient, easy to connect, hot-swappable battery modules provide battery replacement without powering down. Designed and manufactured by APC for over 23 years, Smart-UPS is the world’s most trusted network UPS with over 25 million units sold.

Save time with easy and convenient remote accessibility

Network manageable via serial, USB or optional ethernet. Includes Powerchute Business Edition Software for convenient monitoring and control, safe operating system shutdown and innovative energy management capabilities.

Techninė specifikacija

Savybės	
UPS topologija	„Line-Interactive“
Išvesties galia (VA)	1 kVA
Išvesties galia	700 W
Signalų forma	Sinusas
Įvesties eksploatacinė įtampa (min.)	151 V
Įvesties eksploatacinė įtampa (maks.)	302 V
Įėjimo dažnis	50/60 Hz
Išvesties darbinė įtampa (min.)	220 V
Išvesties darbinė įtampa (maks.)	240 V
Išvesties dažnis	50/60 Hz
Automatinis įtampos reguliavimas (AVR)	Taip
Viršįtampio energijos įvertinimas	459 J
Reakcijos laikas	10 ms
Išvesties įtampa THD	5%
Garso lygis	41 dB
Apsauga nuo viršįtampių	Taip
Garsiniai perspėjimo signalai	Taip
Garsinio pavojaus signalo režimai	Signalas veikiant su akumuliatoriumi, Senkančio akumuliatoriaus signalas, Perkrovos signalas
Automatinis paleidimas iš naujo	Taip
Temperatūros įtampos kompensavimas	Taip
Ryšys	
AC išėjimo tipai	C13 šakotuvas, IEC Jumpers
Maitinimo laido kištukas	C14 šakotuvas
Lizų kiekis	8 AC išvestis(ys / čių)
USB prievadas	Taip
USB 2.0 portų kiekis	1
USB prievado tipas	USB A tipo
Nuoseklioji sąsaja	Taip
Serijinių portų kiekis	1
Ethernet LAN (RJ-45) portų kiekis	1
„SmartSlot“	Taip
„SmartConnect“ prievadas	Taip

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Baterija	
Baterijos technologija	Rūgštinis akumuliatorius (VRLA)
Baterijos veikimo trukmė (maks.)	5 metai
Baterijos įkrovimo laikas	3 h
Hot-Swap baterija	Taip
Automatinis baterijos bandymas	Taip
Aušinimo paleidimas	Taip
Akumuliatoriaus kasetės pakeitimas	RBC6
Konstrukcija	
Forma	„Mini Tower“
Produkto spalva	Juoda
Ekrano tipas	LCD
LED indikatoriai	Taip
Aplinkos sąlygos	
Darbo temperatūros diapazonas (TT)	0 - 40 °C
Sandėliavimo temperatūros norma (T-T)	-15 - 45 °C
Darbo santykinės drėgmės diapazonas	0 - 95%
Sandėliavimo santykinis drėgmės diapazonas	0 - 95%
Darbinis aukštis	0 - 3000 m
Ne darbinis aukštis	0 - 15000 m
Sertifikatai	
Atitikties sertifikatai	RoHS
Sertifikavimas	CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, UL 1778, VDE, REACH
Pakuotės turinys	
Pridėti kabeliai	RJ-45, USB laidas
Pridedama valdymo kortelė	Ne
Greito diegimo vadovas	Taip
Svoris ir matmenys	
Plotis	171 mm
Ilgis	439 mm
Aukštis	219 mm
Svoris	18,9 kg
Pakuotės duomenys	
Pakuotės plotis	328 mm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Pakuotės gylis	595 mm
Pakuotės aukštis	376 mm
Paketo svoris	22,8 kg
Logistikos duomenys	
Gaminių skaičius ant padėklo	12 vnt
Darniosios sistemos (DS) kodas	85078000
Bendrasis anglies pėdsakas (kg of CO2e)	984,74
Matmenys ir svoris	
Matmenys (I × P × A)	60,00cm × 34,00cm × 33,00cm
Svoris	23,65kg

Gamintojo ir saugos informacija

GAMINTOJAS

Schneider Electric SE
rue Joseph Monier 35, 92500 Rueil Malmaison, FR
se.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt