iiyama ProLite TF1615MC-B1 kompiuterio monitorius 39,6 cm (15.6") 1920 x 1080 pikseliai „Full HD“ Lietimui jautrus ekranas Juoda

Gamintojas: **IIYAMA CONSIGNMENT** · Modelis: **TF1615MC-B1** · EAN: **4948570121793** · Prekės kodas: **103638**



511,90 €

Kaina su PVM

Be PVM: **423,06 €**

Sandėlyje

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 39,6 cm (15.6") Juoda
- ✓ HDMI „DisplayPort“ kiekis: 1
- ✓ Ekrano forma: Plokščias
- ✓ Reakcijos laikas: 25 ms
- ✓ 1920 x 1080 pikseliai „Full HD“ Skydo tipas: IPS
- ✓ Energijos vartojimo efektyvumo klasė (SDR): E ErP CE, cULus, EAC, REACH, RoHS, UKCA, WEEE





Aprašymas

The ProLite TF1615MC-B1 (15.6 inch) uses PCAP touch technology and is built into an eye-catching bezel with edge-to-edge glass. Thanks to a glass overlay covering the screen and a rugged bezel, it guarantees high durability and scratch-resistance, making it perfect for kiosk and high use public facing applications. Equipped with a foam seal finish it supports seamless integration into kiosks and provides IP65 rating resulting in dust and water resistance from the front. Landscape, portrait and face-up orientation ensures flexible mounting possibilities in almost any installation. For ease of integration, the ProLite TF1615MC-B1 can be equipped with optional external mounting brackets (OMK5-1) making it an ideal solution for kiosk integrators, industrial environments, control rooms and interactive multimedia.

Techninė specifikacija

Display	
Display diagonal	39.6 cm (15.6")
Display resolution	1920 x 1080 pixels
Native aspect ratio	16:9
Touchscreen	Yes
HD type	Full HD
Panel type	IPS
Response time	25 ms
Screen shape	Flat
Contrast ratio (typical)	1000:1
Touchscreen technology	Projected capacitive system
Number of simultaneous touchpoints	10
Display brightness (peak)	450 cd/m²
Display brightness (typical)	450 cd/m²
Display brightness	405 cd/m²
Aspect ratio	16:9
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Pixel pitch	0.17925 x 0.17925 mm
Horizontal scan range	31.5 - 67.5 kHz
Viewable size, horizontal	34.5 cm
Viewable size, vertical	19.5 cm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Display diagonal (metric)	39.5 cm
Surface hardness	7H
Design	
Market positioning	Business
Product colour	Black
Front bezel colour	Black
Glass thickness	3.3 mm
Ports & interfaces	
Built-in USB hub	Yes
HDMI	Yes
Headphone out	Yes
USB Touch port	Yes
VGA (D-Sub) ports quantity	1
DisplayPorts quantity	1
HDCP	Yes
Ergonomics	
VESA mounting	Yes
Panel mounting interface	100 x 100 mm
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	Traditional Chinese, German, English, Spanish, French, Italian, Japanese
Power	
Energy efficiency class (SDR)	E
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	11 kWh
Power consumption (typical)	18 W
Power consumption (standby)	1.5 W
Power consumption (off)	0.3 W
AC adapter output voltage	12 V
Power supply type	External
Energy efficiency scale	A to G
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 60 °C
Weight & dimensions	


Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Width (with stand)	398.5 mm
Depth (with stand)	42 mm
Height (with stand)	246 mm
Weight (with stand)	2.5 kg
Width (without stand)	398.5 mm
Depth (without stand)	42 mm
Height (without stand)	246 mm
Weight (without stand)	2.5 kg
Packaging data	
Package width	470 mm
Package depth	343 mm
Package height	145 mm
Package weight	4.3 kg
Package type	Box
Packaging content	
Cables included	AC, USB, HDMI, DisplayPort
Power adapter included	Yes
Quick start guide	Yes
Sustainability	
Sustainability certificates	ErP
Other features	
International Protection (IP) code	IP65
Compatible operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
AC adapter included	Yes
Brightness	405 cd/m²
Packaging content	AC adapter, external control pad
Active display area (W x H)	345.2 x 194.6 mm
Weight	2.5 kg
Height	246 mm
Width	398.5 mm
Depth	42 mm
Compliance certificates	CE, cULus, EAC, REACH, RoHS, UKCA, WEEE
Mean time between failures (MTBF)	50000 h

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Certification	CE, EAC, RoHS support, ErP, WEEE, cULus, REACH, UKCA
User controls	picture (contrast, brightness, H.position, V.position, H.size, phase, clock, auto adjust), advanced (colour temperature, sharpness), OSD (OSD timeout, OSD position, OSD H.position, OSD V.position, touch switch), option (reset, language, source select, display mode, factory)
Touch method	stylus, finger, glove (latex)
Control panel	menu,scroll up/ brightness, scroll down/ contrast, select, power
Matmenys ir svoris	
Matmenys (I × P × A)	48,00cm × 35,00cm × 15,00cm
Svoris	4,68kg

Energijos efektyvumas ir ekologinis projektavimas

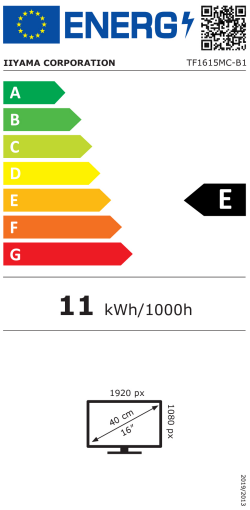

Energijos efektyvumo klasė **E** A–G

- Energijos etiketė
- Gaminio informacijos lapas
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- Naudojimo instrukcija
- Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

iiyama International
Wijkermeerstraat 8, 2131 HA Hoofddorp, NL
iiyama.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt