


Seagate FireCuda 530R 2 TB M.2 PCI Express 4.0 NVMe 3D TLC

Gamintojas: SEAGATE · Modelis: ZP2000GM3A073 · EAN: 8719706437738 · Prekės kodas: 20303

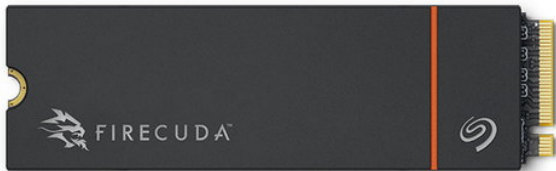

426,90 €

Kaina su PVM

Be PVM: 352,81 €

Neturime



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ COOL COMFORT: Built-in Heatsink minimizes thermal throttling
- ✓ PEAK PERFORMANCE: Ultra-fast PCIe Gen4 SSD speeds for accelerated gaming and content creation
- ✓ EASY GAMING: Supports Microsoft™ DirectStorage technology for faster load times
- ✓ TOUGH STUFF: Extremely durable, with endurance of up to 5,050TBW
- ✓ ON THE INSIDE: Built with leading edge components in a slim M.2 2280 form factor



Aprašymas

FireCuda® 530R with heatsink PCIe Gen4 NVMe SSD delivers relentless performance for gamers, creators, and professionals who demand the fastest speeds and maximum endurance. Powered by PCIe Gen4 NVMe technology, it reaches up to 7,400 MB/s for lightning-fast load times and responsive multitasking. Engineered with a pre-installed, low-profile aluminum heatsink co-developed with EKWB, it allows peak performance under heavy workloads by minimizing thermal throttling. With 1 DWPD durability, advanced data recovery services, and capacities up to 4TB, the FireCuda 530R M.2 SSD is built to handle the toughest environments while keeping your system cool, efficient, and ready for anything.

Techninė specifikacija

Features

SSD capacity	2 TB
SSD form factor	M.2
Interface	PCI Express 4.0
NVMe	Yes
Memory type	3D TLC
Component for	PC
NVMe version	1.4
M.2 SSD size	2280 (22 x 80 mm)
Read speed	7400 MB/s
Write speed	6900 MB/s
Random read (4KB)	1300000 IOPS
Random write (4KB)	1300000 IOPS
PCI Express interface data lanes	x4
S.M.A.R.T. support	Yes
TRIM support	Yes
Mean time between failures (MTBF)	1800000 h
Windows operating systems supported	Windows 10
Linux operating systems supported	Yes
TBW rating	5050
Power	
Power consumption (average)	8.6 W
Weight & dimensions	
Width	109 mm
Depth	155 mm
Height	24 mm
Weight	120 g
Operational conditions	
Operating temperature (T-T)	0 - 70 °C
Storage temperature (T-T)	40 - 85 °C
Non-operating shock	1500 G
Other features	
Warranty period	5 year(s)
Compliance certificates	RoHS
Technical details	

Doesn't contain	Halogen
Logistics data	
Harmonized System (HS) code	84717070
Matmenys ir svoris	
Matmenys (l × p × A)	11,00cm × 16,00cm × 3,00cm
Svoris	0,11kg