iiyama ProLite T2252MSC-B2AG kompiuterio monitorius 54,6 cm (21.5") 1920 x 1080 pikseliai „Full HD“ LCD Lietimui jautrus ekranas Juoda

Gamintojas: **IIYAMA CONSIGNMENT** · Modelis: **T2252MSC-B2AG** · EAN: **4948570125180** · Prekės kodas: **338891**



342,90 €

Kaina su PVM

Be PVM: **283,39 €**

Sandėlyje

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 54,6 cm (21.5") Juoda
- ✓ Įmontuoti garsiakalbiai
- ✓ HDMI „DisplayPort“ kiekis: 1
- ✓ Ekrano forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 100 Hz Reakcijos laikas: 5 ms Atsako trukmės matavimo tipas: GTG (Gray to Gray)
- ✓ 1920 x 1080 pikseliai „Full HD“ Skydo tipas: IPS
- ✓ Energijos vartojimo efektyvumo klasė (SDR): D ErP CE, cTUVus, EAC, REACH, RoHS, TÜV mark, UKCA, WEEE



Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903






Aprašymas

With its Full HD (1920x1080) resolution and accurate 10-point touch technology DeepContrast PCAP+ (Optical Bonded PCAP), which ensures smooth and precise touch response and low light reflection, the ProLite T2252MSC-B2AG delivers seamless and accurate touch response. In addition, the display is protected from moisture and potential condensation development. Featuring IPS LCD screen technology, it offers exceptional colour performance and wide viewing angels, making it a perfect choice for a vast array of interactive applications. The flexible stand can be positioned at several angels creating a comfortable and ergonomic user experience and the integrated cable management system hides all the cables and electrical wires giving a neat and cable-free workspace. In addition, the edge-to-edge glass and ultra slim design creates an eye-catching finish. The Anti Glare coating helps to avoid issues with reflections and external light sources affecting colour reproduction, contrast and sharpness. The ProLite T2252MSC-B2AG is the ideal solution for interactive signage, instore retail, POS and interactive presentations.

Techninė specifikacija

Display	
Display diagonal	54.6 cm (21.5")
Display resolution	1920 x 1080 pixels
Native aspect ratio	16:9
Display technology	LCD
Touchscreen	Yes
HD type	Full HD
Panel type	IPS
Response time	5 ms
Screen shape	Flat
Contrast ratio (typical)	1000:1
Maximum refresh rate	100 Hz
Display number of colours	16.7 million colours
Touchscreen technology	Projected capacitive system
Touch technology	Multi-touch
Number of simultaneous touchpoints	10
Display brightness (typical)	250 cd/m²
Display brightness	215 cd/m²
Response time measurement type	GTG (Gray to Gray)
Viewing angle, horizontal	178°
Viewing angle, vertical	178°

Pixel pitch	0.249 x 0.249 mm
Horizontal scan range	30 - 83 kHz
Viewable size, horizontal	47.9 cm
Viewable size, vertical	26 cm
Display diagonal (metric)	54.5 cm
Surface hardness	7H
Performance	
NVIDIA G-SYNC	No
AMD FreeSync	No
Low Blue Light technology	Yes
Palm rejection	Yes
Multimedia	
Built-in speaker(s)	Yes
Built-in camera	No
Number of speakers	2
RMS rated power	2 W
Design	
Product colour	Black
Front bezel colour	Black
Ports & interfaces	
Built-in USB hub	Yes
HDMI	Yes
USB hub version	3.2 Gen 1 (3.1 Gen 1)
Number of upstream ports	2
Number of downstream ports	2
USB Touch port	Yes
HDMI ports quantity	1
DisplayPorts quantity	1
HDCP	Yes
Ergonomics	
VESA mounting	Yes
Cable lock slot	Yes
Height adjustment	No
Panel mounting interface	100 x 100 mm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Cable lock slot type	Kensington
Tilt adjustment	Yes
Tilt angle range	-5 - 90°
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	Traditional Chinese, Czech, German, English, French, Italian, Japanese, Dutch, Polish, Russian

Power

Energy efficiency class (SDR)	D
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	12.8 kWh
Power consumption (typical)	13 W
Power consumption (standby)	1.5 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Power supply type	Internal

Weight & dimensions

Width (with stand)	493.5 mm
Depth (with stand)	239.5 mm
Height (with stand)	361.5 mm
Weight (with stand)	4.5 kg

Packaging data

Package width	560 mm
Package depth	150 mm
Package height	350 mm
Package weight	6 kg

Packaging content

Cables included	AC, USB, HDMI
Quick start guide	Yes

Sustainability

Sustainability certificates	ErP


Other features

Compatible operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Brightness	215 cd/m²
Active display area (W x H)	478.6 x 260 mm
USB ports quantity	2
Weight	4.5 kg
Height	361.5 mm
Width	493.5 mm
Depth	239.5 mm
Compliance certificates	CE, cTUVus, EAC, REACH, RoHS, TÜV mark, UKCA, WEEE
Mean time between failures (MTBF)	50000 h
User controls	picture adjust (brightness, contrast, i-Style, adv. contrast, ECO, OD, X-Res), color settings (gamma, rgb range, color temp.), image settings (video mode adjust, blue light reducer, sharp & soft), OSD (horizontal position, vertical pos., time, background), extra (reset, dcc/ci, signal select, volume, mute, opening logo, led, touch switch)
Touch method	stylus, finger, glove
Control panel	Joystick: right/ menu/ enter, left/ input/ exit, up/ eco, down, power
Technical details	
Native refresh rate	100 Hz
Matmenys ir svoris	
Matmenys (I × P × A)	57,00cm × 35,00cm × 15,00cm
Svoris	5,80kg

Energijos efektyvumas ir ekologinis projektavimas

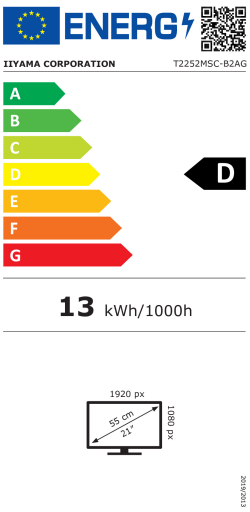

Energijos efektyvumo klasė D A-G

- Energijos etiketė
- Gaminio informacijos lapas
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- Naudojimo instrukcija
- Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

iiyama International
Wijkermeerstraat 8, 2131 HA Hoofddorp, NL
iiyama.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.