
Ubiquiti USW-PRO-MAX-48-POE network switch L3 2.5G Ethernet (100/1000/2500) Power over Ethernet (PoE) Grey

Gamintojas: **UBIQUITI** · Modelis: **USW-Pro-Max-48-PoE** · EAN: **810084692721** · Prekės kodas: **365729**

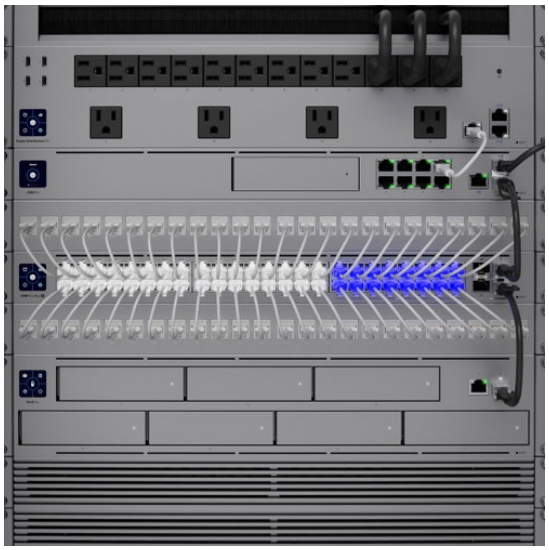

1 512,90 €

Kaina su PVM

Be PVM: **1 250,33 €**

Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt











Aprašymas

Total Power over Ethernet (PoE) budget: 720 W | Cables included: Power | Operating temperature (T-T): -5 - 40 °C | Depth: 399.6 mm | Redundant power supply (RPS) support: Yes | Housing material: SGCC | Product colour: Grey | Networking standards: IEEE 802.1x | Rack mounting: Yes | Power consumption (max): 820 W | Power over Ethernet (PoE): Yes | Width: 442.4 mm | AC input voltage: 100 - 240 V | Weight: 6.2 kg | Quality of Service (QoS) support: Yes | Form factor: 1U | Height: 43.7 mm | Reset button: Yes | Power source: AC | Display type: LCM | Operating relative humidity (H-H): 10 - 90% | LED indicators: System | AC input frequency: 50/60 Hz | Manual: Yes | Rate limiting: Yes | 10G support: No | Forwarding rate: 167 Mpps | Power over Ethernet (PoE) voltage: 57 V | SFP+ module slots quantity: 4 | Virtual LAN features: Voice VLAN | Power connector: AC-in jack | Loop protection: Yes | Flow control support: Yes | Power over Ethernet plus (PoE+) ports quantity: 32 | Packet buffer memory: 2 MB | Jumbo frames support: Yes | Broadcast storm control: Yes | Switching capacity: 224 Gbit/s | Basic switching RJ-45 Ethernet ports type: Gigabit Ethernet (10/100/1000) | Switch type: Managed | Heat dissipation: 341.2 BTU/h | Power over Ethernet (PoE) power per port: 15.4 W | DHCP features: DHCP guarding | Static route: Yes | Throughput: 112 Gbit/s | Number of VLANs: 1000 | Rack mount kit: Yes | DHCP features: DHCP relay | Port mirroring: Yes | Power supply included: Yes | DHCP features: DHCPv6 snooping | MAC address table: 32000 entries | DHCP features: DHCP server | Gigabit

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Ethernet (copper) ports quantity: 32 | Switch layer: L3 | Backlight display: Yes | Power over Ethernet (PoE) type supported: PoE++ (4PPoE) | IGMP snooping: Yes | Power over Ethernet (PoE) type supported: PoE+ | Basic switching RJ-45 Ethernet ports quantity: 48 | VLAN support: Yes | Power over Ethernet 4PPoE (PoE++) ports quantity: 16 | 2.5G Ethernet (copper) ports quantity: 16 | Compliance certificates: Federal Communications Commission (FCC) | Compliance certificates: National Defense Authorization Act (NDAA) | Compliance certificates: CE | IPv4 routes: 12000 | Sustainability compliance: Yes | Compliance certificates: Industry Canada (IC) | Warnings: Make sure the ventilation of the equipment is not blocked. | Warnings: Follow the safety guidelines for electrical current. | Warnings: Avoid contact of the device with liquid.

Techninė specifikacija

Konstrukcija	
Produkto spalva	Grey
Matmenys ir svoris	
Matmenys (I × P × A)	52,00cm × 12,00cm × 54,00cm
Svoris	8,06kg