


LG 49UH7N-E Signage Display Digital signage flat panel 124.5 cm (49") LED Wi-Fi 700 cd/m² 4K Ultra HD Black Built-in processor WebOS 24/7

Gamintojas: **LG** · Modelis: **49UH7N-E** · EAN: **8806087960747** · Prekės kodas: **36983**

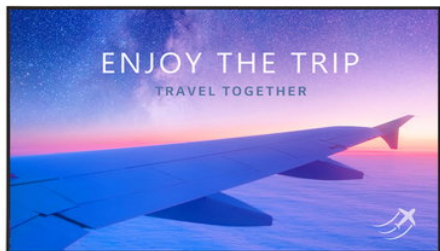

833,90 €

Kaina su PVM

Be PVM: **689,17 €**

Neturime



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Resolution : 3,840 x 2,160 (UHD)
- ✓ Brightness (Typ.) : 700 nit
- ✓ Surface Treatement (Haze) : 28 %
- ✓ Bezel : 8.9 mm (T/R/L), 12.9 mm (B)
- ✓ Interface : HDMI(2) / DP / USB 2.0 / RS232C / RJ45 / Audio / IR
- ✓ webOS Smart Platform



Aprašymas

High Resolution Display

It offers a resolution that is four times higher than FHD, satisfying customers visually. Additionally, the anti-glare coating on the screen reduces screen reflection in bright lighting environments, increasing visibility and legibility, providing customers with a comfortable screen.

Convenient webOS Platform

The UH7N-E is equipped with a high-performance SoC that allows for multiple tasks to be performed without a separate media player. The webOS platform provides app development tools with an intuitive UI that enhances user convenience, enabling easy connection with external sensors and webOS partner apps to create an SI-friendly environment.

Durability that Provides Reliability

Optimized for business environments, the UH7N-E is guarded against the potential impact of salt, dust, iron powder and humidity through the implementation of conformal coating on the power board. Also, its customer-centric features, such as IP5x, 30-degree tilting and Shock Monitoring, provide both reliability and satisfaction.

Design for Space Utilization

Designed with thin bezels and simple cable management, the UH7N-E saves space. With specialized hidden power inlets, it can be installed close to the wall, leaving only about 13 mm of space with the slim bracket. Bezels accessories can also be used to convert it into an art frame, making it a stylish interior element that matches customers' interior spaces.

* The product image will differ slightly from the actual appearance of the product due to the variance caused by each inch option.

* Bezel accessories are sold separately at an additional cost.

Enhanced Security Features

The UH7N-E provides security features, including LG's Enhanced Kernel Protection (EKP) technology, guarding important data from external access or attacks. LG UHD Signage also holds reliable certification in the field of information security, maintaining customers' data and businesses securely. For example, this model is ISO/IEC 15408 Common Criteria EAL2 Certified.

Sustainability

Recycled resins are used to manufacture back covers for digital signage product* and LG plans to expand this practice to other models as well. In addition, recycled cardboard was partially used to produce packaging materials, and the printing information on the packaging materials was written by only black ink.

* Digital signage product refers "UH7N-E" model

SuperSign Solutions

SuperSign is an integrated and intuitive content management solution for creative and organized digital signage content in your space, connecting customers to a range of services with convenient user experiences. There are a variety of versions such as SuperSign Cloud, so discover and enjoy the version that best fits you.

Techninė specifikacija

Specifications	
Sandėlio grupė	TV, Audio & Video > Monitors > LFD Monitors [+20][-29]
Display	
Display diagonal	124.5 cm (49")
Display technology	LED
Display resolution	3840 x 2160 pixels
Display brightness	700 cd/m ²
HD type	4K Ultra HD
Panel type	IPS
LED backlighting type	Edge-LED
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1100:1

Contrast ratio (dynamic)	1000000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Colour saturation	95%
Rated lifetime	50000 h
Native refresh rate	60 Hz
Haze rate	28%
Ports & interfaces	
HDMI ports quantity	2
DVI port	No
DisplayPorts quantity	2
USB port	Yes
DisplayPorts in	1
DisplayPorts out	1
USB ports quantity	2
USB connector type	USB Type-A, USB Type-C
Ethernet LAN (RJ-45) ports	1
Audio (L/R) out	1
RS-232C	Yes
Remote (IR) input	1
Audio	
Built-in speaker(s)	Yes
Number of built-in speakers	2
RMS rated power	20 W
Design	
Product design	Digital signage flat panel
Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Screen shape	Flat
Panel mounting interface	300 x 300 mm
Bezel width (bottom)	1.29 cm
Bezel width (side)	8.9 mm
Bezel width (top)	8.9 mm

Anti-glare screen	Yes
Mounting type	Wall
Performance	
Purpose	Universal
On Screen Display (OSD)	Yes
Number of OSD languages	21
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Czech, Danish, German, Dutch, English, Spanish, Finnish, French, Greek, Italian, Japanese, Korean, Norwegian, Portuguese, Russian, Swedish, Turkish
Operating hours (hours/days)	24/7
HDCP	Yes
International Protection (IP) code	IP5X
Power	
Power consumption (typical)	90 W
Power consumption (standby)	0.5 W
Power consumption (off)	0.5 W
Power consumption (max)	130 W
Energy efficiency class (SDR)	G
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	83.7 kWh
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Computer system	
Computer system	Yes
Built-in processor	Yes
Internal memory	16 GB
Operating system installed	WebOS
Operating system version	webOS 6.0
Weight & dimensions	
Display width	1095.6 mm
Display depth	29.7 mm
Display height	630.8 mm
Display weight	13.6 kg
Packaging data	
Package width	1215 mm

Package depth	152 mm
Package height	736 mm
Package weight	16.1 kg
Packaging content	
Tilt angle	30°
Remote control included	Yes
Cables included	USB Type-C
Tilt adjustment	Yes
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	10 - 80%
Certificates	
Certification	CB / NRTL EMC ePEAT (US Only) ErP / Energy Star ISTA6 Carbon Trust
Network	
Ethernet LAN	Yes
Wi-Fi	Yes
Other features	
Power supply type	Internal
Matmenys ir svoris	
Matmenys (I × P × A)	122,00cm × 15,00cm × 75,00cm
Svoris	16,10kg