iiyama ProLite T2752MSC-W1AG kompiuterio monitorius 68,6 cm (27") 1920 x 1080 pikseliai „Full HD“ LCD Lietimui jautrus ekranas Balta

Gamintojas: **IIYAMA CONSIGNMENT** · Modelis: **T2752MSC-W1AG** · EAN: **4948570127214** · Prekės kodas: **371983**



484,90 €

Kaina su PVM

Be PVM: **400,74 €**

Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 68,6 cm (27") Balta
- ✓ Įmontuoti garsiakalbiai
- ✓ USB aukštakrypčio prievado tipas: B tipo USB HDMI „DisplayPort“ kiekis: 1
- ✓ Ekrano forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 100 Hz Reakcijos laikas: 5 ms Atsako trukmės matavimo tipas: GTG (Gray to Gray)
- ✓ 1920 x 1080 pikseliai „Full HD“ Skydo tipas: IPS
- ✓ Energijos vartojimo efektyvumo klasė (SDR): E ErP CE, cTUVus, EAC, REACH, RoHS, TÜV mark, UKCA, WEEE








Aprašymas

Enjoy smooth and intuitive control with the ProLite T2752MSC-W1AG, a 27" Full HD touchscreen built for natural and precise touch. Its DeepContrast PCAP+ (Optical Bonded PCAP) 10-point touch technology ensures instant responsiveness, vivid contrast and reduced reflections thanks to optical bonding, in addition, the display is protected from moisture and potential condensation development. The anti-fingerprint and anti-glare coating keeps the screen clean and easy to read, while the IPS panel delivers rich colours and consistent image quality from any angle. Designed for comfort and efficiency, the adjustable stand supports ergonomic positioning, and the integrated cable management system keeps your workspace neat. With built-in audio and versatile connectivity (HDMI, DisplayPort, USB 3.2 hub), it offers a clean and flexible setup. Sleek edge-to-edge glass and a refined white design make it as stylish as it is functional – perfect for interactive signage, retail, POS, hospitality and creative spaces.

Techninė specifikacija

Display	
Display diagonal	68.6 cm (27")
Display resolution	1920 x 1080 pixels
Native aspect ratio	16:9
Display technology	LCD
Touchscreen	Yes
HD type	Full HD
Panel type	IPS
Response time	5 ms
Screen shape	Flat
Contrast ratio (typical)	1000:1
Maximum refresh rate	100 Hz
Display number of colours	16.7 million colours
Touchscreen technology	Projected capacitive system
Touch technology	Multi-touch
Number of simultaneous touchpoints	10
Display brightness (typical)	400 cd/m²
Display brightness	345 cd/m²
Response time measurement type	GTG (Gray to Gray)
Anti-glare screen	Yes
Viewing angle, horizontal	178°
Viewing angle, vertical	178°

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Pixel pitch	0.311 x 0.311 mm
Horizontal scan range	30 - 86 kHz
Vertical scan range	50 - 76 Hz
Viewable size, horizontal	59.8 cm
Viewable size, vertical	33.6 cm
Display diagonal (metric)	68.6 cm
Surface hardness	7H
Colour depth	8 bit
Performance	
Flicker-free technology	Yes
Low Blue Light technology	Yes
Palm rejection	Yes
Multimedia	
Built-in speaker(s)	Yes
Number of speakers	2
RMS rated power	2 W
Design	
Product colour	White
Front bezel colour	White
Ports & interfaces	
Built-in USB hub	Yes
HDMI	Yes
Headphone out	Yes
USB hub version	3.2 Gen 1 (3.1 Gen 1)
USB upstream port type	USB Type-B
Number of upstream ports	1
Number of downstream ports	2
Number of USB Type-B upstream ports quantity	1
USB Type-A downstream ports quantity	2
USB Touch port	Yes
HDMI ports quantity	1
DisplayPorts quantity	1
Headphone outputs	1
HDCP	Yes

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Ergonomics	
VESA mounting	Yes
Height adjustment	No
Panel mounting interface	100 x 100 mm
Cable management	Yes
Tilt adjustment	Yes
Tilt angle range	-5 - 90°
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	German, English, Spanish, French, Italian, Japanese, Dutch, Polish, Portuguese, Russian
Number of OSD languages	10
Plug and Play	Yes
Power	
Energy efficiency class (SDR)	E
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	20.8 kWh
Power consumption (typical)	21 W
Power consumption (standby)	1.5 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Input current	1 A
Power supply type	Internal
Energy efficiency scale	A to G
Operational conditions	
Operating temperature (T-T)	5 - 35 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	10 - 80%
Storage relative humidity (H-H)	10 - 90%
Weight & dimensions	
Width (with stand)	614 mm
Depth (with stand)	239.5 mm
Height (with stand)	403 mm
Weight (with stand)	6.7 kg
Packaging data	

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Package width	710 mm
Package depth	160 mm
Package height	465 mm
Package weight	8.4 kg
USB cable length	1.5 m

Packaging content

Cables included	AC, USB, HDMI
Quick start guide	Yes
HDMI cable length	1.5 m
Power cable length	1.8 m

Sustainability

Sustainability certificates	ErP

Other features


Compatible operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
Positional accuracy	2 mm
Brightness	345 cd/m²
Packaging content	Screwdriver
Active display area (W x H)	598 x 336 mm
USB ports quantity	2
Weight	6.7 kg
Height	403 mm
Width	614 mm
Depth	239.5 mm
Compliance certificates	CE, cTUVus, EAC, REACH, RoHS, TÜV mark, UKCA, WEEE
Mean time between failures (MTBF)	50000 h
User controls	Picture adjust (brightness, contrast, i-Style Colour, adv. contrast, ECO, OverDrive, X-Res technology), color settings (gamma, RGB range, color temp.), image settings (video mode adjust, blue light reducer, sharp and soft), OSD (horizontal pos., vertical pos., OSD time, OSD background, language, display information), extra (reset, DDC/CI, signal select, volume, mute, led, opening logo, touch switch)
Touch method	finger, glove (latex), capacitive stylus
Control panel	Press/enter, right/volume, left/eco/exit, up/signal select, down, power

Technical details

Native refresh rate	100 Hz

Matmenys ir svoris	
Matmenys (I × P × A)	71,00cm × 43,00cm × 16,00cm
Svoris	8,54kg

Energijos efektyvumas ir ekologinis projektavimas

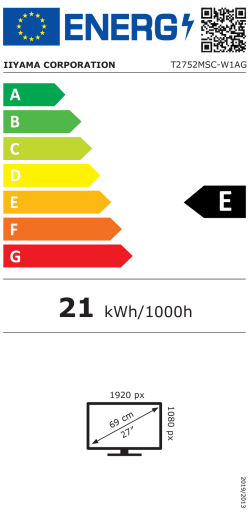

Energijos efektyvumo klasė **E** A–G

- Energijos etiketė
- Gaminio informacijos lapas
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- Naudojimo instrukcija
- Gaminio lankstinukas
- Vaizdo įrašas 1 objects.icecat.biz/objects/137552400_70775187.mp4
- Vaizdo įrašas 2 objects.icecat.biz/objects/137552400_70775188.mp4
- Vaizdo įrašas 3 objects.icecat.biz/objects/137552400_70775185.mp4
- Vaizdo įrašas 4 objects.icecat.biz/objects/137552400_70775186.mp4

Gamintojo ir saugos informacija

GAMINTOJAS

iiyama International
Wijkermeerstraat 8, 2131 HA Hoofddorp, NL
iiyama.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt