iiyama ProLite T2752MSC-B1 kompiuterio monitorius 68,6 cm (27") 1920 x 1080 pikseliai „Full HD“ LED Lietimui jautrus ekranas Juoda

Gamintojas: **IIYAMA** · Modelis: **T2752MSC-B1** · EAN: **4948570122998** · Prekės kodas: **433980**



409,90 €

Kaina su PVM

Be PVM: **338,76 €**

Sandėlyje

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 68,6 cm (27") Juoda
- ✓ Įmontuoti garsiakalbiai
- ✓ HDMI „DisplayPort“ kiekis: 1
- ✓ Ekrano forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 60 Hz Reakcijos laikas: 5 ms Atsako trukmės matavimo tipas: GTG (Gray to Gray)
- ✓ 1920 x 1080 pikseliai „Full HD“ Skydo tipas: IPS
- ✓ Energijos vartojimo efektyvumo klasė (SDR): E ErP REACH, RoHS, WEEE








Aprašymas

The ProLite T2752MSC-B1 with its Full HD (1920x1080) resolution and with IPS panel technology offers exceptional colors and wide viewing angles. The Optical Bonded Projective Capacitive (PCAP) 10-point touch technology ensures a seamless and accurate touch response and a lower light reflection, in addition, the display is protected against humidity and potential moisture development. he flexible stand can be positioned at several angels creating a comfortable and ergonomic user experience and the integrated cable management system hides all the cables and electrical wires giving a neat and cable-free workspace. A special Nano coating ensures a smoother touch and less resistance in the swipe. It makes the screen less static and susceptible to dirt, dust and fingerprints. A perfect choice for a vast array of applications.

Techninė specifikacija

Display	
Display diagonal	68.6 cm (27")
Display resolution	1920 x 1080 pixels
Native aspect ratio	16:9
Display technology	LED
Touchscreen	Yes
HD type	Full HD
Panel type	IPS
Response time	5 ms
Screen shape	Flat
Contrast ratio (typical)	1000:1
Maximum refresh rate	60 Hz
Display number of colours	16.7 million colours
Touchscreen technology	Projected capacitive system
Touch technology	Multi-touch
Number of simultaneous touchpoints	10
Display brightness (peak)	400 cd/m²
Display brightness (typical)	400 cd/m²
Display brightness	360 cd/m²
Response time measurement type	GTG (Gray to Gray)
Aspect ratio	16:9
Viewing angle, horizontal	178°

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Viewing angle, vertical	178°
Pixel pitch	0.311 x 0.311 mm
Horizontal scan range	30 - 83 kHz
Viewable size, horizontal	59.8 cm
Viewable size, vertical	33.6 cm
Display diagonal (metric)	68.6 cm
Surface hardness	7H
Colour depth	8 bit
Performance	
NVIDIA G-SYNC	No
AMD FreeSync	No
Flicker-free technology	Yes
Low Blue Light technology	Yes
Windows operating systems supported	Yes
Linux operating systems supported	Yes
Palm rejection	Yes
Multimedia	
Built-in speaker(s)	Yes
Built-in camera	No
Number of speakers	2
RMS rated power	2 W
Design	
Market positioning	Business
Product colour	Black
Front bezel colour	Black
Glass thickness	2.2 mm
Ports & interfaces	
Built-in USB hub	Yes
HDMI	Yes
USB hub version	3.2 Gen 1 (3.1 Gen 1)
Number of upstream ports	1
Number of downstream ports	2
USB Type-A downstream ports quantity	3
USB Touch port	Yes

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903


HDMI ports quantity	1
DisplayPorts quantity	1
Audio output	Yes
HDCP	Yes
Network	
Ethernet LAN	No
Ergonomics	
VESA mounting	Yes
Cable lock slot	Yes
Panel mounting interface	100 x 100 mm
Wall mountable	Yes
Cable lock slot type	Kensington
Tilt adjustment	Yes
Tilt angle range	5 - 90°
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	German, English, Spanish, French, Italian, Japanese, Dutch, Polish, Portuguese, Russian
Number of OSD languages	10
Plug and Play	Yes
LED indicators	Yes
Power	
Energy efficiency class (SDR)	E
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	20.6 kWh
Power consumption (typical)	21 W
Power consumption (standby)	1.5 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Power supply type	Internal
Energy efficiency scale	A to G
Weight & dimensions	
Width (with stand)	614 mm
Depth (with stand)	239.5 mm
Height (with stand)	403 mm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Weight (with stand)	6.7 kg
Packaging data	
Package width	710 mm
Package depth	160 mm
Package height	465 mm
Package weight	8.4 kg
Packaging content	
Cables included	AC, USB, HDMI
Quick start guide	Yes
Sustainability	
Sustainability certificates	ErP
Other features	
Compatible operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
Positional accuracy	2 mm
Brightness	360 cd/m²
Active display area (W x H)	598 x 336 mm
USB ports quantity	2
Weight	6.7 kg
Height	403 mm
Width	614 mm
Depth	239.5 mm
Compliance certificates	REACH, RoHS, WEEE
Mean time between failures (MTBF)	50000 h
Certification	CE, TÜV-Bauart, ErP, CU
User controls	Picture adjust (brightness, contrast, i-Style Color, adv. contrast, ECO, OverDrive, X-Res technology), color settings (gamma, RGB range, color temp.), image settings (video mode adjust, blue light reducer, sharp and soft), OSD (horizontal pos., vertical pos., OSD time, OSD background, language, display information), extra (reset, DDC/CI, signal select, volume, mute, led, opening logo, touch switch)
Touch method	stylus, finger, glove (latex)
Control panel	Press/enter, right/volume, left/eco/exit, up/signal select, down, power
Supplied AC adapter type	AC
Technical details	
Native refresh rate	60 Hz

Logistics data	
Harmonized System (HS) code	85285210
Matmenys ir svoris	
Matmenys (I × P × A)	71,00cm × 46,00cm × 16,00cm
Svoris	8,48kg

Energijos efektyvumas ir ekologinis projektavimas

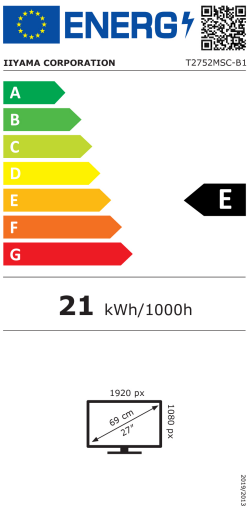

Energijos efektyvumo klasė **E** A–G

- Energijos etiketė
- Gaminio informacijos lapas
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- Naudojimo instrukcija
- Gaminio lankstinukas

Gamintojo ir saugos informacija

GAMINTOJAS

iiyama International
Wijkermeerstraat 8, 2131 HA Hoofddorp, NL
iiyama.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt