


iiyama T6529AS-B1AG Signage Display Kiosk design 163.8 cm (64.5") LED Wi-Fi 420 cd/m² 4K Ultra HD Black Touchscreen Built-in processor Android 24/7

Gamintojas: **IIYAMA** · Modelis: **T6529AS-B1AG** · EAN: **4948570125593** · Prekės kodas: **440356**

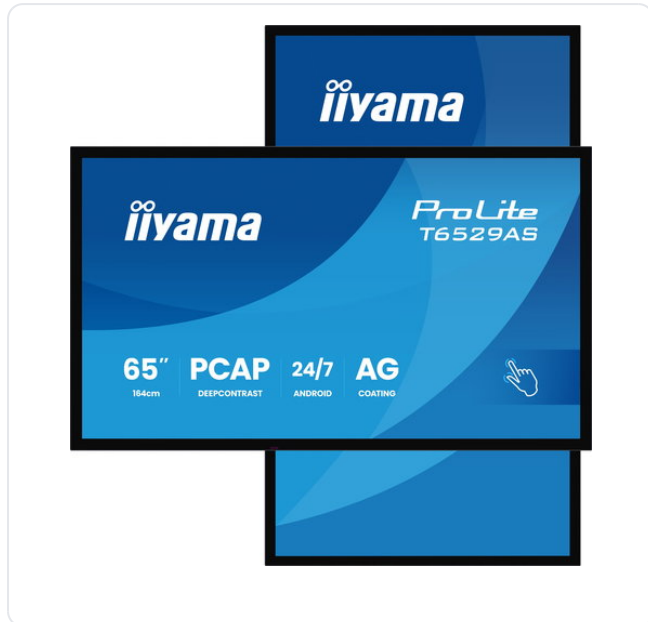

1 854,91 €

Kaina su PVM

Be PVM: **1 532,98 €**

[Sandėlyje](#)




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Indoor Kiosk design Black
- ✓ Ethernet LAN Wi-Fi
- ✓ 163.8 cm (64.5") 3840 x 2160 pixels LED 420 cd/m²
- ✓ Built-in speaker(s) 20 W
- ✓ Touchscreen Edge-LED 6.5 ms

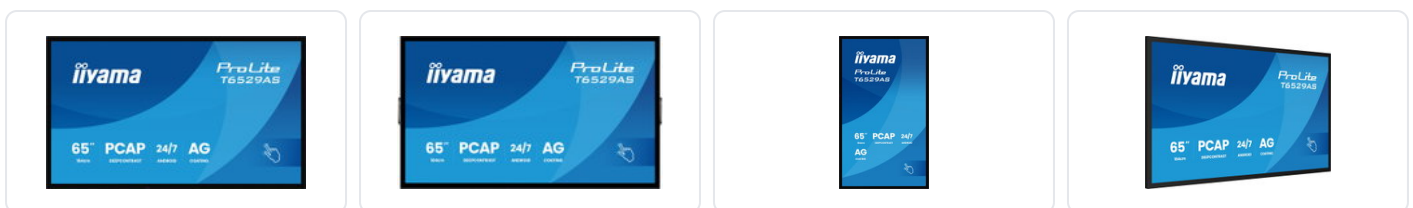

Aprašymas

The ProLite T6529AS-B1AG is a 65" all-in-one PCAP touchscreen display built for the evolving needs of modern workspaces, especially huddle spaces where creativity, flexibility, and seamless sharing take center stage. Powered by Android OS, this interactive display delivers a user-friendly and highly adaptable experience. You can install your preferred apps directly on the device, enabling customized workflows tailored to your environment — whether in a collaborative meeting area, an enterprise innovation hub, or an educational breakout room. The USB-C loop-through feature simplifies connectivity by allowing multiple displays to be easily daisy-chained while transmitting power, data, and video — all through a single cable. This reduces cable clutter and setup time, making it ideal for dynamic workspaces. The included wall mounting bracket makes installation straightforward and secure. With iiSignage2 (CMS), iiControl (DMS), and iiShare (Wireless Presentation) you gain full control over content and messaging, even remotely — perfect for updating shared information or branded visuals on the fly. The integrated EShare app brings wireless screen sharing and collaboration to life, supporting multi-user interaction and real-time ideation. The T6529AS-B1AG isn't just a display — it's a

collaboration tool designed to empower teams, streamline communication, and make every meeting count.

Techninė specifikacija

Specifications	
Sandėlio grupė	Large Format Displays [+292][-2]
Display	
Display diagonal	163.8 cm (64.5")
Display technology	LED
Display resolution	3840 x 2160 pixels
Display brightness	420 cd/m²
HD type	4K Ultra HD
Touchscreen	Yes
Panel type	VA
LED backlight	Yes
LED backlighting type	Edge-LED
Touchscreen technology	Projected capacitive system
Number of simultaneous touchpoints	20
Multi-touch	Yes
Native aspect ratio	16:9
Response time	6.5 ms
Contrast ratio (typical)	4000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.372 x 0.372 mm
Active display area (W x H)	1428.5 x 803.5 mm
Display diagonal (metric)	164 cm
Horizontal scan range	28 - 160 kHz
Surface hardness	8
Glass thickness	3.7 mm
Ports & interfaces	
HDMI ports quantity	2
DVI port	No
USB port	Yes
HDMI version	1.4/2.0

USB ports quantity	2
USB version	2
USB Power Delivery (USB PD)	Yes
USB Power Delivery up to	15 W
USB Type-C DisplayPort Alternate Mode	Yes
Ethernet LAN (RJ-45) ports	1
RS-232C	Yes
Remote (IR) input	1
Remote (IR) output	1
Audio	
Built-in speaker(s)	Yes
Number of built-in speakers	2
RMS rated power	20 W
Design	
Product design	Kiosk design
Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Orientation	Horizontal/Vertical
Screen shape	Flat
Panel mounting interface	400 x 400 mm
Bezel colour	Black
Anti-glare screen	Yes
Performance	
Purpose	Universal
On Screen Display (OSD)	Yes
Number of OSD languages	8
On Screen Display (OSD) languages	Czech, Danish, German, English, Spanish, Finnish, French, Italian, Norwegian, Dutch, Polish, Russian, Swedish
Operating hours (hours/days)	24/7
HDCP	Yes
HDCP version	1.4/2.2
Mean time between failures (MTBF)	50000 h
Power	
Power consumption (typical)	118 W

Power consumption (standby)	0.5 W
Power consumption (off)	0.3 W
Energy efficiency class (SDR)	G
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	118 kWh
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Energy efficiency scale	A to G

Computer system

Built-in processor	Yes
Processor manufacturer	ARM
Processor architecture	ARM Cortex-A73
Processor cores	4
Internal memory	4 GB
On-board graphics card model	ARM Mali-G51
Internal storage capacity	32 GB
Operating system installed	Android
Operating system version	14

Weight & dimensions

Display width	1447.3 mm
Display depth	42.8 mm
Display height	852.3 mm
Display weight	38.5 kg
Width	1447.3 mm
Depth	42.8 mm
Height	852.3 mm
Weight	38.5 kg
Width (with stand)	1447.3 mm
Depth (with stand)	42.8 mm
Height (with stand)	852.3 mm
Weight (with stand)	38.5 kg

Packaging data

Package width	1645 mm
Package depth	192 mm
Package height	1050 mm

Package weight	47.3 kg
Packaging content	
Remote control included	Yes
Batteries included	Yes
Stylus pen	Yes
Number of stylus pens	2
Cables included	AC, HDMI, RS-232
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	-20 - 60%
Certificates	
Certification	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH, UKCA, cTUVus
Network	
Ethernet LAN	Yes
Wi-Fi	Yes
Wi-Fi standards	Wi-Fi 5 (802.11ac)
Technical details	
Sustainability certificates	ErP
Compliance certificates	CB, CE, cTUVus, EAC, REACH, RoHS, TÜV mark, UKCA, WEEE
User controls	picture (brightness, contrast, sharpness, black level, tint, colour, noise reduction, gamma selection, low blue light, color temp., color control, picture reset), audio (balance, treble, bass, volume, audio out, max. volume, min. volume, mute, speakers setting audio reset), OSD setting (OSD timeout, OSD H position, OSD V position, OSD transparency, information OSD, side bar), general (logo and animation, wallpaper, no signal image, schedule, off timer), screen (zoom mode, custom zoom, system rotation, scree reset), device (power on status, RS232 routing, IR control, Physical button, motorized stand, power saving, panel saving, monitor info, Touch lock, other), system (language, system update, settng reset, factory reset, Android setting), admin (menu lock, meeting lock, HDMI CEC, kiosk mode, screen share, Miracast standby, log export)
Other features	
Quick start guide	Yes
Viewable size, horizontal	142.8 cm
Viewable size, vertical	80.3 cm
Brightness	420 cd/m²
Compatible operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
Power supply type	Internal

Matmenys ir svoris

Matmenys (I × P × A)

165,00cm × 105,00cm × 19,00cm