


AG Neovo QM-6502 Digital signage flat panel 163.8 cm (64.5") LCD 400 cd/m² 4K Ultra HD Black

Gamintojas: **AG NEOVO** · Modelis: **QM652011M0000** · EAN: **4710739597059** · Prekės kodas: **443637**

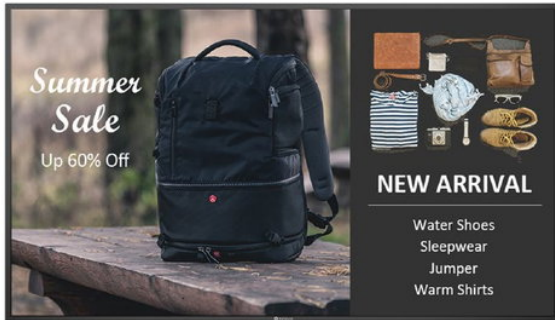

1 097,91 €

Kaina su PVM

Be PVM: **907,36 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ K UHD 3840 x 2160 resolution
- ✓ 400 nits brightness for indoor public use
- ✓ IPS Panel technology offers high colour accuracy and wide viewing angles
- ✓ Anti-Burn-in™ technology prevents image ghosting
- ✓ Built-in USB media playback for simple signage content delivery
- ✓ Versatile connectivity: HDMI x 3, VGA
- ✓ Alink™ function for synchronised powering on/off via HDMI
- ✓ Extensive display control: RS232, LAN and PID Command & Ctrl software
- ✓ Black-level adjustment for presenting more details in dark images
- ✓ Selectable gamma curves optimise different kinds of images

Aprašymas

The new QM-Series 4K digital signage displays are designed for digital signage applications that require crisper and clearer image presentation. Featuring a premium IPS panel for 24/7 operation, 4K UHD resolution with a wide viewing angle, and easy-to-use media playback via a USB drive. The QM-Series 4K digital signage displays are ideally used for retail stores, corporate meeting areas, hotels and other public spaces.

Techninė specifikacija

Specifications

Sandėlio grupė

Large Format Displays [+292][−2]

Display

Display diagonal

163.8 cm (64.5")

Display technology	LCD
Display resolution	3840 x 2160 pixels
Display brightness	400 cd/m²
HD type	4K Ultra HD
Touchscreen	No
Panel type	IPS
LED backlight	Yes
Response time	5 ms
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.372 x 0.372 mm
Horizontal scan range	15 - 136 kHz
Vertical scan range	23 - 76 Hz
Haze rate	1%
Surface hardness	3H
Ports & interfaces	
HDMI ports quantity	3
DVI port	No
DisplayPorts quantity	0
USB port	Yes
HDMI version	2
VGA (D-Sub) input ports	1
USB ports quantity	1
USB version	2
Ethernet LAN (RJ-45) ports	1
Microphone in	Yes
RS-232 interface	Yes
PC Audio out	Yes
Audio	
Built-in speaker(s)	Yes
Number of built-in speakers	2
RMS rated power	20 W
Design	
Product design	Digital signage flat panel

Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Panel mounting interface	400 x 400 mm
Anti-glare screen	Yes
Performance	
Purpose	Commercial
Power	
Power consumption (typical)	167 W
Power consumption (standby)	0.5 W
Input voltage	100 - 240 V
Power consumption (off)	0.3 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	167 kWh
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G
Weight & dimensions	
Display width	1462.3 mm
Display depth	81 mm
Display height	837.3 mm
Display weight	28.5 kg
Packaging data	
Package width	1580 mm
Package depth	151 mm
Package height	1050 mm
Package weight	33.8 kg
Packaging content	
Batteries included	Yes
Power adapter included	Yes
Cables included	AC, HDMI
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C

Storage relative humidity (H-H)	10 - 90%
Network	
Ethernet LAN	Yes
Wi-Fi	No
Technical details	
Compliance certificates	CE, Federal Communications Commission (FCC), Low Voltage Directive (LVD), REACH, RoHS, UKCA, WEEE
Sustainability compliance	Yes
Other features	
Quick start guide	Yes
Cable lock slot type	Kensington
Matmenys ir svoris	
Matmenys (I × P × A)	165,00cm × 106,00cm × 28,00cm
Svoris	36,00kg