


Philips 65BDL3511Q/02 Signage Display Digital signage flat panel 165.1 cm (65") LCD 400 cd/m² 4K Ultra HD Black 18/7

Gamintojas: **PHILIPS** · Modelis: **65BDL3511Q/02** · EAN: **8721038102451** · Prekės kodas: **479176**

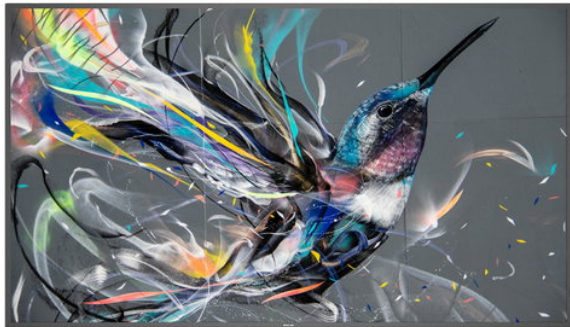

1 489,90 €

Kaina su PVM

Be PVM: **1 231,32 €**

Neturime



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Energy-saving automatic backlight control
- ✓ Integrated media player. Easily schedule USB content
- ✓ FailOver ensures content is always playing
- ✓ Easy control. Remotely manage networked displays
- ✓ Operate, monitor and maintain with CMND & Control
- ✓ Schedule what you want, when you want with SmartPlayer
- ✓ Ultra-HD. Rich images. Stunning contrast



Aprašymas

Inform and enthrall with a Philips Q-Line Professional Ultra HD Display. This reliable solution can be up and running as quickly as you need.

Techninė specifikacija

Specifications

Sandėlio grupė

[INN] INFO MONITORS > 55 [+20][-116]

Display

Display diagonal	165.1 cm (65")
Display technology	LCD
Display resolution	3840 x 2160 pixels
Display brightness	400 cd/m²
HD type	4K Ultra HD
Touchscreen	No
Panel type	IPS
LED backlight	Yes
LED backlighting type	Direct-LED
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.372 x 0.372 mm
Display diagonal (metric)	163.9 cm
Native refresh rate	60 Hz
Haze rate	25%

Ports & interfaces

HDMI ports quantity	3
DVI port	Yes
DisplayPorts quantity	0
USB port	Yes
HDMI version	2
DVI-I ports quantity	1
USB ports quantity	2
USB version	2
Ethernet LAN (RJ-45) ports	1
RS-232C	Yes
Infrared data port	Yes

Audio

Built-in speaker(s)	Yes
---------------------	-----

Number of built-in speakers	2
RMS rated power	20 W
Design	
Product design	Digital signage flat panel
Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Orientation	Horizontal/Vertical
Panel mounting interface	400 x 400 mm
Bezel width (bottom)	1.49 cm
Bezel width (side)	1.49 cm
Bezel width (top)	1.49 cm
Performance	
Purpose	Universal
Operating hours (hours/days)	18/7
Mean time between failures (MTBF)	50000 h
Power	
Power consumption (typical)	165 W
Power consumption (standby)	0.5 W
Power consumption (max)	220 W
Energy efficiency class (SDR)	G
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Computer system	
Computer system	No
Built-in processor	No
Weight & dimensions	
Display width	1462.3 mm
Display depth	68.9 mm
Display height	837.3 mm
Display weight	27.8 kg
Packaging content	
Remote control included	Yes
Batteries included	Yes

Cables included	AC, RS-232, IR
-----------------	----------------

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Network

Ethernet LAN	Yes
Wi-Fi	No

Other features

Audio input	1
Audio output	1

Matmenys ir svoris

Matmenys (I × P × A)	15,00cm × 158,00cm × 105,00cm
Svoris	35,50kg