

Hannspree HT225HPB kompiuterio monitorius 54,6 cm (21.5") 1920 x 1080 pikseliai „Full HD“ LED Lietimui jautrus ekranas Stalo paviršius Juoda

Gamintojas: **HANNSPREE** · Modelis: **HT225HPB** · EAN: **4711404021794** · Prekės kodas: **500690**



328,90 €

Kaina su PVM

Be PVM: **271,82 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 54,6 cm (21.5") Juoda
- ✓ Įmontuoti garsiakalbiai
- ✓ HDMI versija: 1.4 „DisplayPort“ kiekis: 1 „DisplayPort“ versija: 1.2a
- ✓ Ekrano forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 60 Hz Reakcijos laikas: 7 ms
- ✓ 1920 x 1080 pikseliai „Full HD“ Skydo tipas: TFT
- ✓ Energijos vartojimo efektyvumo klasė (SDR): E ENERGY STAR





Aprašymas

With 1920x1080 Full HD resolution and Projective Capacitive 10 point touch technology the HANNSpree HT225HPB delivers seamless and accurate touch response. Featuring Ultra-Wide Viewing Angle LED-backlight LCD screen technology, it offers exceptional colour performance and wide viewing angles, making it an excellent choice for a vast array of demanding interactive applications.

Perfect for both commercial and consumer applications, the HT225HPB is a one-stop solution for your multi-touch monitor needs: an ideal screen for Interactive Digital Signage, InStore Retail, Gaming/amusement, Point-of-Sale terminals (POS), Interactive Kiosks, Presentations purposes and many more applications.

PROJECTED CAPACITIVE (PCAP) TOUCH TECHNOLOGY

Now multiple users can experience shared touchscreen interaction. Using up to 10 finger touch points, the HANNSpree HT225HPB Monitor allows everyone to play and collaborate at the same time.

The precise and accurate multi-touch display — allowing up to 10 simultaneous touches — is optimized for use with Windows 8, 8.1 and 10, allowing you to work smarter and more efficiently.

There's no need for additional controllers – all they have to do is just reach out and touch the screen. It is certified for Windows 10 and designed to offer superior performance as well as intuitive control, so you can be more productive and do everything you want to do smoothly and quickly.

With Projected Capacitive Touch, users can enjoy a smoother and more accurate touch display experience with increased interactivity. Thanks to the glass overlay this technology is highly durable, the Touch performance is unaffected by everyday use and mishaps such as dirt, dust, condensation, liquid spills or cleaning solutions.

This technology delivers super fast, sensitive touch response with excellent dragging performance and perfect picture quality. Ten-point multi-touch support lets you unlock the power of today's touch-enabled applications.

SCRATCH RESISTANT - MULTI-TOUCH SCREEN WITH 7H SURFACE HARDNESS

7H scratch resistant surface hardness ensures durability, as well as a consistent high quality touch experience.

Scratch resistance is essential for touch solutions used for education and public environment. This is achieved thanks to a glass overlay covering the screen. This means that the panel surface can withstand impact from objects and scratches, making it perfect for public spaces and educational institutions.

The HT225HPB with edge to edge glass meets the increasing demands for Protected Displays in the Education, Retail and Industrial applications.

The HT225HPB (7H hardness rating) is designed specifically for schools, colleges, universities but also Retail and Industrial applications offering protection from impacts and dirt for a long life solution.

SLIDE EASILY INTO THE BEST ANGLE FOR TOUCH CONTROL

The HANNSpree HT225HPB has been specially developed to provide you with the best angle for both viewing and interaction. The sliding-tilt stand allows you to easily and smoothly adjust the screen and find your perfect perspective for comfortable viewing as well as convenient touch usage.

The HT225HPB has an Smart adjustable stand with 15 ~ 70 degree tilt angles to give you an ideal viewing position. Alternatively the hinged stand allows the monitor to lay down completely flat on the desk for use as a giant tablet.

Thanks to ergonomic design, you can minimise bad posture or wrist strain and make the most of the HT225HPB's great picture quality and touch interaction.

You can also choose to mount your monitor on the wall, so you can enjoy even greater viewing flexibility and allowing you to place it easily in tight spaces.

VIVID IMAGES, LIFE LIKE VISUALS THE LATEST TECHNOLOGY WITH 178° ULTRA-WIDE VIEW ANGLES

The Touch monitor HT225HPB features a 16:9 aspect ratio LED-backlit panel with a 178° ultra-wide view angle that minimizes color shift on both horizontal and vertical planes to ensure quality visuals from almost any direction. It delivers improved color accuracy plus increased energy efficiency.

The HT225HPB uses a 178°(H) / 178°(V) ultra-wide viewing angle Full HD panel that eliminates color shift from almost any direction and in nearly every angle.

EXTENSIVE CONNECTIVITY

The HANNspree HT225HPB features a host of connectivity options that include HDMI, Display Port and D-Sub VGA for Full HD 1080p content transmission.

HANNspree HT225HPB Touch Monitor with its wide range of inputs ensures that everything from gaming to chatting with friends online is easily achieved. The various inputs ensure that your monitor is more compatible and ready to handle all of your content.

Enabling touch is easy! Simply connect the USB cable from your PC to the monitor's USB upstream port, and connect one of the video inputs to project images onscreen.

SPEAKERS AND HEADPHONES

The HT225HPB is equipped with stereo speakers, for clear audio that sounds like it's coming from a high end stereo system. The speakers deliver a true stereo effect for an enhanced listening experience, especially when displaying multimedia content during lessons, therefore removing the need for external speakers.

Techninė specifikacija

Ekranas	
Ekranas įstrižainė	54,6 cm (21.5")
Ekranas rezoliucija	1920 x 1080 pikseliai
Natūralus kraštinių santykis	16:9
Ekranas technologija	LED
Lietimui jautrus ekranas	Taip
HD tipas	„Full HD“
Skydo tipas	TFT
Reakcijos laikas	7 ms
Ekranas forma	Plokščias
Kontrasto santykis (tipinis)	1000:1
Maksimalus atnaujinimo dažnis	60 Hz
Ekranas spalvų skaičius	16,78 milijonai spalvų
LED galinis apšvietimas	Taip

Liečiamo ekrano tipas	Stalo paviršius
Liečiamo ekrano technologija	Prognozuojama talpinė sistema
Lietimui jautri technologija	„Multi-touch“
Vienalaikių kontaktinių taškų skaičius	10
Ekrano ryškumas	250 cd/m²
Kontrasto santykis (dinaminis)	80000000:1
Matymo kampas, horizontalus	178°
Matymo kampas, vertikalus	178°
Pikselių žingsnis	0,24825 x 0,24825 mm
Horizontali diapazono riba	30 - 82 kHz
Vertikali diapazono riba	55 - 76 Hz
Ekrano įstrižainės dydis (metrinė)	54,6 cm
Paviršiaus kietumas	7H
3D	Ne
Veikimo charakteristikos	
NVIDIA G-SYNC	Ne
„AMD FreeSync“	Ne
Multimedija	
Įmontuoti garsiakalbiai	Taip
Integruota kamera	Ne
Garsiakalbių skaičius	2
RMS galingumas	4 W
Įmontuotas mikrofonas	Ne
Konstrukcija	
Produkto spalva	Juoda
Stiklo storis	0,7 mm
Ryšys	
Įmontuotas USB jungčių daugiklis	Ne
HDMI	Taip
VGA (D-Sub) portų kiekis	1
HDMI portų kiekis	1
HDMI versija	1.4
„DisplayPort“ kiekis	1
„DisplayPort“ versija	1.2a

PC garso „in“ jungtis	Taip
Ergonomija	
VESA tvirtinimo pagrindas	Taip
Kabelio spynos lizdas	Taip
Suderinama su VESA sienos tvirtinimo sistema	100 x 100 mm
Montuojamas ant sienos	Taip
Laido spynos lizdo tipas	Kensington
Pokrypio reguliavimas	Taip
Posvyrio kampo intervalas	15 - 70°
On Screen Display (OSD) kalbos	Danų kalba, Vokiečių kalba, Olandų kalba, Anglų kalba, Ispanų kalba, Suomių kalba, Prancūzų kalba, Italų kalba, Portugalų kalba
OSD kalbų skaičius	9
LED indikatoriai	Taip
Energijos valdymas	
Energijos vartojimo efektyvumo klasė (SDR)	E
Energijos sąnaudos (SDR) per 1000 valandų	14 kWh
Energijos suvartojimas	24 W
Energijos suvartojimas (laukimo režimu)	0,28 W
Energijos suvartojimas (off)	0,26 W
AC įėjimo įtampa	100 - 240 V
AC įėjimo dažnis	50 - 60 Hz
Energijos efektyvumo skalė	Nuo A iki G
Aplinkos sąlygos	
Darbo temperatūros diapazonas (TT)	0 - 40 °C
Darbo santykinės drėgmės diapazonas	10 - 90%
Svoris ir matmenys	
Plotis (be stovo)	490,3 mm
Gylis (be stovo)	47,8 mm
Aukštis (be stovo)	299,4 mm
Svoris (be stovo)	3,6 kg
Pakuotės duomenys	
Pakuotės plotis	550 mm
Pakuotės gylis	115 mm
Pakuotės aukštis	366 mm
Paketo svoris	4,6 kg

Pakuotės turinys

Pridėtas stovas	Taip
Pridėti kabeliai	AC, DVI, HDMI, USB
Greitos pradžios vadovas	Taip

Tvarumas

Tvarumo sertifikatai	ENERGY STAR
----------------------	-------------


Kitos savybės

Talpinimas palaikomas	Horizontalus / vertikalus
Sertifikavimas	CE, CB, HDMI, EU Energy Label, Win 10

Logistikos duomenys

Darniosios sistemos (DS) kodas	85285210
--------------------------------	----------

Energijos efektyvumas ir ekologinis projektavimas

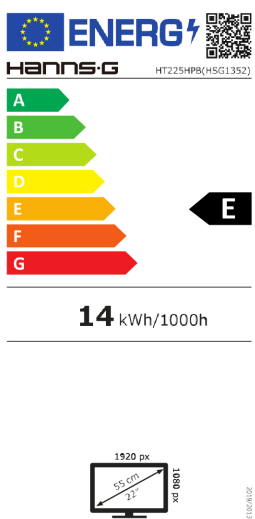

Energijos efektyvumo klasė

E A-G

- › [Energijos etiketė](#)
- › [Gaminio informacijos lapas](#)
- › [EPREL duomenų bazė](#)

Dokumentai ir vaizdo įrašai

- › [Naudojimo instrukcija](#)
- › [Gaminio lankstinukas](#)
- › [Vaizdo įrašas](#) [objects.icecat.biz/objects/57872673_27573330.mp4](#)

Gamintojo ir saugos informacija

GAMINTOJAS

Hannspree Europe Holdings B.V.

Newtonweg 25, 5928 PN Venlo, NL

hannspree.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt