


Samsung QB24C-T Digital signage flat panel 61 cm (24") LED Wi-Fi 250 cd/m² Full HD Black Touchscreen Built-in processor Tizen 7.0 16/7

Gamintojas: **SAMSUNG** · Modelis: **LH24QBCTBGCXEN** · EAN: **8806095303710** · Prekės kodas: **502121**

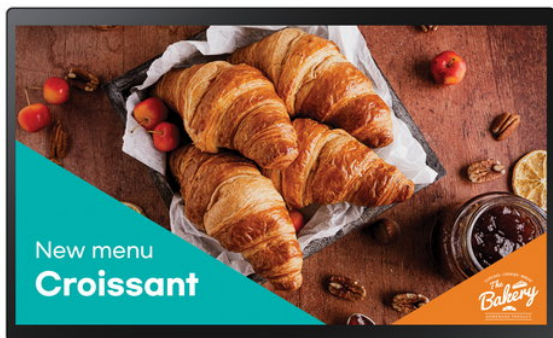

825,90 €

Kaina su PVM

Be PVM: **682,56 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Small display, Big impact
- ✓ 10 point multi-touc. Fast, effective touch capabilities
- ✓ EMS Class B & IP5X. Safe operation & reliable performance



Aprašymas

Expand commercial space with compact display

Get the most out of every space with Samsung QB24C-T small digital signage. The compact display provides sharp messaging with its Full HD resolution. Its enhanced internal solutions and intuitive home screen UX make it easy to use, also ensuring reliable performance for any business use.

Fast, effective touch capabilities

10 point multi-touch

The QB24C-T provides 10-point multi-touch, while fast response time powers an intuitive interface that allows customer-driven search and action, creating new customer interactions that drive purchases.

Connect with convenience

Home UI

QB24C-T boasts greater usability with an upgraded home screen UI. Popular categories like Features, Sources and Settings are displayed on the same screen for convenient availability. The Favorites folder grants users quick, easy access to frequently used features in a single click.

Convenient, clean display control

Center IR

With center IR, each display receives IR signals directly to the panel, allowing easy and convenient remote control. When mounted, the display doesn't require an IR receiver cable extension. Built-in Wi-Fi allows wireless remote management for both content and display.

Safe operation, reliable performance

IP5X / EMC Class B

QB24C-T is electromagnetic compatibility (EMC) class B compliant, meeting strict safety and reliability standards for operation. Additionally, the display's IP5x rating underscores its robust durability even in dusty environments.

Change the way to manage your display

Samsung VXT

Samsung VXT is a cloud-based solution that brings together content management and remote device management capabilities, allowing users to remotely manage hardware settings and troubleshoot issues from afar, while effortlessly creating and deploying content without the need for training.

Techninė specifikacija

Specifications	
Sandėlio grupė	Peripherie & Desktop > Monitore [+1613][-584]
Display	
Display diagonal	61 cm (24")
Display technology	LED
Display resolution	1920 x 1080 pixels
Display brightness	250 cd/m ²
HD type	Full HD
Touchscreen	Yes
Panel type	ADS
Touchscreen technology	Capacitive
Multi-touch	Yes
Response time	14 ms
Contrast ratio (typical)	1000:1
Dynamic contrast ratio marketing name	Mega Contrast
Viewing angle, horizontal	178°

Viewing angle, vertical	178°
Pixel pitch	0.2745 x 0.2745 mm
Horizontal scan range	56 - 84.5 kHz
Vertical scan range	48 - 75 Hz
Haze rate	25%
RGB colour space	NTSC
Colour gamut	72%
Ports & interfaces	
HDMI ports quantity	1
DVI port	No
DisplayPorts quantity	0
USB port	Yes
HDMI version	1.4
HDMI input ports quantity	1
USB ports quantity	1
Ethernet LAN (RJ-45) ports	1
RS-232 interface	Yes
Infrared data port	Yes
Remote (IR) input	1
Design	
Product design	Digital signage flat panel
Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Screen shape	Flat
Panel mounting interface	100 x 100 mm
Performance	
Purpose	Universal
Operating hours (hours/days)	16/7
HDCP	Yes
HDCP version	2.2
Power	
Power consumption (typical)	38.5 W
Power consumption (sleep)	0.5 W

AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Computer system	
Computer system	Yes
Built-in processor	Yes
Computer system type	System on Chip (SoC)
Operating system installed	Tizen 7.0
Weight & dimensions	
Display width	547.9 mm
Display depth	34.6 mm
Display height	334.4 mm
Display weight	4 kg
Packaging data	
Package width	620 mm
Package depth	122 mm
Package height	419 mm
Package volume	5200 cm³
Packaging content	
Cables included	Power
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	10 - 80%
Network	
Ethernet LAN	Yes
Wi-Fi	Yes
Technical details	
Sustainability certificates	EPEAT Bronze
Compliance certificates	CE, China Compulsory Certification (CCC), Electromagnetic Compatibility (EMC), Federal Communications Commission (FCC), KCC, RoHS, VCCI
Audio out (mini jack)	1
Sustainability compliance	Yes
Other features	
Bluetooth	Yes
Flash memory	8000 MB

RS-232 input ports	1
--------------------	---

RJ-45 input ports	1
-------------------	---