


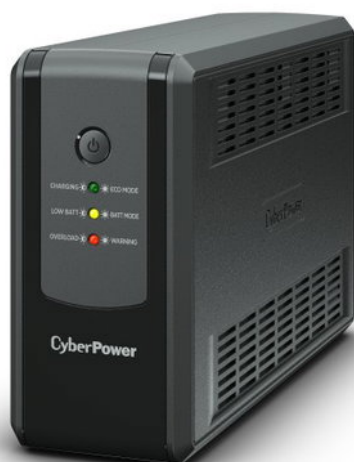

# CyberPower UT650EG-FR uninterruptible power supply (UPS) Line- Interactive 0.65 kVA 360 W 3 AC outlet(s)

Modelis: UT650EG-FR

Gamintojas: CYBERPOWER

EAN: 4712856273281

Prekės kodas: 538481

## 79.99€

Certification: CE | Form factor: Tower | Waveform: Sine | Operating altitude: 0 - 3000 m | AC outlets quantity: 3 AC outlet(s) | Depth: 280 mm | Output power capacity: 0.65 kVA | Audible alarm(s): Yes | Response time: 4 ms | Operating relative humidity (H-H): 0 - 90% | UPS topology: Line-Interactive | Automatic Voltage Regulation (AVR): Yes | Width: 84 mm | Battery technology: Sealed Lead Acid (VRLA) | Operating temperature (T-T): 0 - 40 °C | AC outlet types: Type E | Housing material: Plastic | Weight: 3.8 kg | Storage relative humidity (H-H): 0 - 90% | LED indicators: Yes | EMI/RFI noise filtering: Yes | Storage temperature (T-T): -20 - 50 °C | Output power: 360 W | Input frequency: 50/60 Hz | Cable length: 1.2 m | Product colour: Black | Power protection features: Overload | Audible alarm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš

įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

[www.shopro.lt](http://www.shopro.lt) | [info@shopro.lt](mailto:info@shopro.lt) | +370 693 39903

modes: Alarm when on battery, Fault, Low battery alarm, Overload alarm | Height: 174 mm |  
Compliance certificates: RoHS | Non-operating altitude: 0 - 3000 m | Output operation voltage (max):  
230 V | Input operation voltage (min): 165 V | Battery recharge time: 6 h | Input operation voltage  
(max): 290 V | Warnings: Keep away from sources of fire and water. | Warnings: Use the appliance in  
well-ventilated areas to avoid overheating. | Warnings: Do not disassemble the unit housing, there  
may be a risk of electric shock.