




CyberPower OLS1500ERT2UA uninterruptible power supply (UPS) Double- conversion (Online) 1.5 kVA 1350 W 8 AC outlet(s)

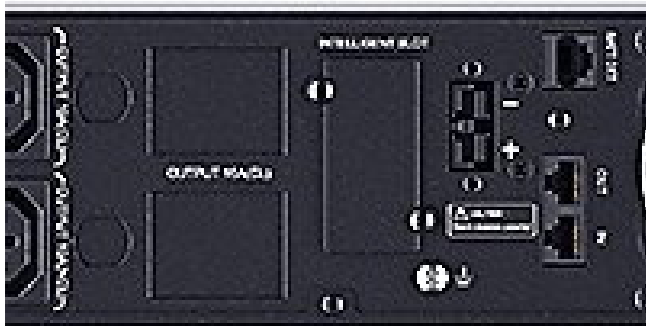

Modelis: OLS1500ERT2UA

Gamintojas: CYBERPOWER

EAN: 4711027790282

Prekės kodas: 538487

533.99€

Warnings: Do not disassemble the unit housing, there may be a risk of electric shock. | Warnings: Use the appliance in well-ventilated areas to avoid overheating. | Warnings: Keep away from sources of fire and water. | Compliance certificates: RoHS | Compliance certificates: CE | AC outlet types: C13 coupler | UPS topology: Double-conversion (Online) | Emergency Power Off (EPO) connector: Yes | Power protection features: Short circuit | Operating temperature (T-T): 0 - 40 °C | Depth: 430 mm | Audible alarm(s): Yes | Audible alarm modes: Alarm when on battery, Battery replacement, Fault,

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt | info@shopro.lt | +370 693 39903

Low battery alarm, Overload alarm | Typical backup time at full load: 5.3 min | Output power factor: 0.9 | Maximum current: 9 A | Storage relative humidity (H-H): 10 - 90% | USB port: Yes | Number of batteries supported: 4 | Input power factor: 0.99 | Battery voltage: 48 V | Output power capacity: 1.5 kVA | AC outlets quantity: 8 AC outlet(s) | Width: 438 mm | Harmonized System (HS) code: 8504408590 | Response time: 0 ms | Rack capacity: 2U | EMI/RFI noise filtering: Yes | Output power: 1350 W | Operating relative humidity (H-H): 20 - 90% | Surge protection: Yes | Weight: 13.8 kg | Noise level: 45 dB | Efficiency (ECO mode): 95% | Typical backup time at half load: 15.3 min | Output operation voltage (min): 208 V | Surge energy rating: 363 J | Waveform: Pure sine | Display type: LCD | Form factor: Rackmount/Tower | Output voltage Total Harmonic Distortion (THD): 5% | Storage temperature (T-T): -20 - 50 °C | Input frequency: 50/60 Hz | Cable length: 1.5 m | Emergency Power Off (EPO): Yes | Built-in fan: Yes | Power protection features: Overload | Power protection features: Input fuse | Charging current: 1.5 A | Package height: 230 mm | Output frequency: 50/60 Hz | Crest factor: 3:1 | Replacement battery cartridge: BPSE48V40ART2U | Non-operating altitude: 0 - 1500 m | Output operation voltage (max): 240 V | Battery recharge time: 4 h | Product colour: Black | Height: 88 mm | Cables included: USB cable | Housing material: Metal | Ethernet LAN (RJ-45) ports: 2 | Package width: 540 mm | Input operation voltage (min): 190 V | Operating altitude: 0 - 1500 m | Input operation voltage (max): 300 V | Power plug: C14 coupler