




TP-Link Omada 8-Port 2.5G L2+ Managed Switch

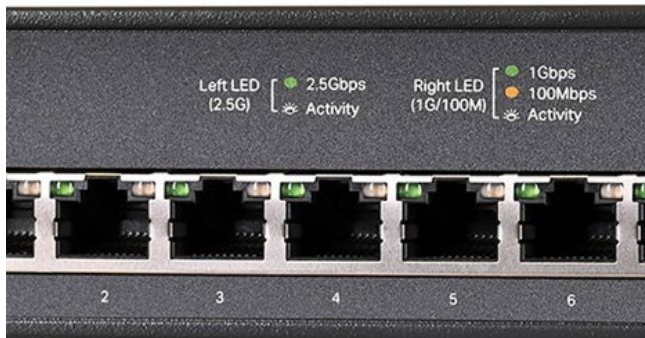

Modelis: SG3210X-M2

Gamintojas: TP-LINK

EAN: 4897098689523

Prekės kodas: 540545

247.99€

Certification: CE, FCC, RoHS | Quick start guide: Yes | Operating relative humidity (H-H): 10 - 90% | Networking standards: IEEE 802.1D | Networking standards: IEEE 802.1s | Form factor: 1U | Networking standards: IEEE 802.1w | Security algorithms: SSH-2 | Storage temperature (T-T): -40 - 70 °C | Quality of Service (QoS) support: Yes | Security algorithms: SSL/TLS | LED indicators: Yes | Web-based management: Yes | MAC address filtering: Yes | Security algorithms: HTTPS | AC input frequency: 50/60 Hz | Security algorithms: SSH | Operating temperature (T-T): 0 - 50 °C | AC input voltage: 100 - 240 V | Package type: Box | Ethernet LAN data rates: 100,1000,2500 Mbit/s | Product colour: Black | Package weight: 2.84 kg | Authentication type: AAA, TACACS+ | GARP VLAN Registration Protocol (GVRP): Yes | Cloud-managed: Yes | Number of IP interfaces: 16 | Rack mounting: Yes | ARP inspection: Yes | Width: 294 mm | Fanless: Yes | IGMP snooping: Yes | Basic switching RJ-45 Ethernet ports type: 2.5G Ethernet (100/1000/2500) | Basic switching RJ-45 Ethernet ports quantity: 8 | Configuring Location Settings (CLI): Yes | DHCP features: DHCPv6 snooping | Storage relative humidity (H-H): 5 - 90% | Package width: 528 mm | DHCP features: DHCP snooping | Switch layer: L2+ | IP routing: Yes | Console port: RJ-45/micro-USB | Harmonized System (HS) code: 85176990 | Password protection: Yes | Head-of-line (HOL) blocking: Yes | DHCP features: DHCP client

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt | info@shopro.lt | +370 693 39903

| DHCP features: DHCP relay | Traffic classification: Yes | Static route: Yes | VLAN support: Yes | MAC address table: 16000 entries | DHCP features: DHCP server | Cables included: AC | Switch type: Managed | Package height: 80 mm | Rate limiting: Yes | Power consumption (typical): 15 W | Heat dissipation: 51.18 BTU/h | Access Control List (ACL): Yes | Height: 44 mm | DHCP features: DHCPv6 client | Authentication: MAC-based authentication, Port-based authentication | Flow control support: Yes | Queue scheduling algorithms: Weighted Round Robin (WRR) | Power source: AC | Loop protection: Yes | SFP+ module slots quantity: 2 | Queue scheduling algorithms: WRR+SP | Number of static routes: 48 | Port mirroring: Yes | Power supply included: Yes | Management protocols: SNMPv1/v2c/v3, SNTP | Packet buffer memory: 12 MB | MIB support: RFC2925, RFC2618, RFC2620, RFC2021, RFC2819, RFC2674, RFC1493, RFC1643, RFC2233, RFC1213 | Virtual LAN features: MAC address-based VLAN | System event log: Yes | Package depth: 250 mm | Queue scheduling algorithms: SP | 10G support: Yes | BPDU filtering/protection: Yes | SSH/SSL support: Yes | Number of VLANs: 4000 | IP-MAC-Port binding: Yes | Virtual LAN features: Private VLAN | Multicast support: Yes | Virtual LAN features: Voice VLAN | Depth: 180 mm | Virtual LAN features: Tagged VLAN | Virtual LAN features: Protocol-based VLAN | Forwarding rate: 59.52 Mpps | Broadcast storm control: Yes | Multicast Listener Discovery (MLD) snooping: Y | Number of fans: 2 fan(s) | Static port security: Yes | Link aggregation: Yes | Jumbo frames support: Yes | Virtual LAN features: Port-based VLAN | Switching capacity: 80 Gbit/s | Spanning tree protocol: Yes | Jumbo frames: 9000 | Power connector: AC-in jack | 2.5G Ethernet (copper) ports quantity: 8