




# NET ROUTER 1000M 7PORT/RB5009UG+S+IN MIKROTIK

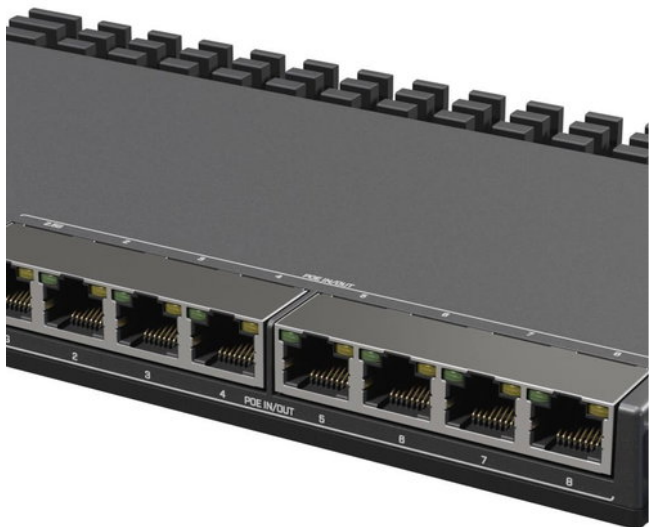

Modelis: RB5009UG+S+IN

Gamintojas: MIKROTIK

EAN: 4752224007148

Prekės kodas: 552518

## 196.00€

Double the usual performance: we took your feedback from the MikroTik User Meetings to create the perfect home lab router: compact, powerful, with multiple powering options and efficient cooling. RB5009 has it all, and even more!

The board features 9 wired ports and a full-sized USB 3.0. Seven of the ports are Gigabit Ethernet, another one is 2.5 Gigabit Ethernet, and the last one is a 10G SFP+ cage. All the ports are connected to a powerful Marvell Amethyst family switch-chip with a 10 Gbps full-duplex line leading to the Marvell Armada Quad-core ARMv8 1.4 GHz CPU. Both CPU and the switch-chip are located on the bottom of the board – so the case acts as a massive heat-sink!

RB5009UG+S+IN can be powered in 3 different ways:

### a) PoE-in from Ethernet port #1

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

[www.shopro.lt](http://www.shopro.lt) | [info@shopro.lt](mailto:info@shopro.lt) | +370 693 39903

b) DC Jack

c) 2-pin terminal on the side

Boards come with 1GB of DDR4 RAM and 1GB NAND storage. This combination of ports and components, compared to our other products in a similar form factor, provides almost double the performance in configurations with heavy CPU loads.

With a simple set of mounting accessories, you can mount FOUR of these routers in a single 1U rackmount space! No more server-room-Tetris, just pure productivity.

Summary: Mikrotik RB5009UG+S+IN. Networking standards: IEEE 802.3af, IEEE 802.3at, Ethernet interface type: 2.5 Gigabit Ethernet, Ethernet LAN data rates: 10,100,1000 Mbit/s. USB version: 3.2 Gen 1 (3.1 Gen 1). Compliance certificates: RoHS. Mean time between failures (MTBF): 200000 h, Certification: CE, EAC, ROHS. Product colour: Black | Vendor Homepage:

[https://mikrotik.com/product/rb5009ug\\_s\\_in#fndtn-specifications](https://mikrotik.com/product/rb5009ug_s_in#fndtn-specifications) | Ethernet WAN: Yes | Ethernet interface type: 2.5 Gigabit Ethernet | Ethernet LAN data rates: 10/100/1000 | Networking standards: IEEE 802.3af/IEEE 802.3at | Mobile network generation: Not supported | DC-in jack: Yes | Ethernet LAN (RJ-45) ports: 1 | Gigabit Ethernet (copper) ports quantity: 7 | Installed SFP+ modules quantity: 1 | Power over Ethernet (PoE) ports quantity: 1 | USB ports quantity: 1 | USB version: 3.2 Gen 1 (3.1 Gen 1) | Compliance certificates: RoHS | Certification: CE, EAC, ROHS | Mean time between failures (MTBF): 200000 | Product colour: Black | Power consumption (typical): 20 | Power over Ethernet (PoE): Yes | Power source type: DC | Storage temperature (T-T): -40 - 60 | Harmonized System (HS) code: 85176990 | Product model code: RB5009UG+S+IN | Units per Pallet: 0 | Units per Shipping Box: 20 | Unit Calculated Volume: 0.00256 | Unit Calculated Weight: 0.902