


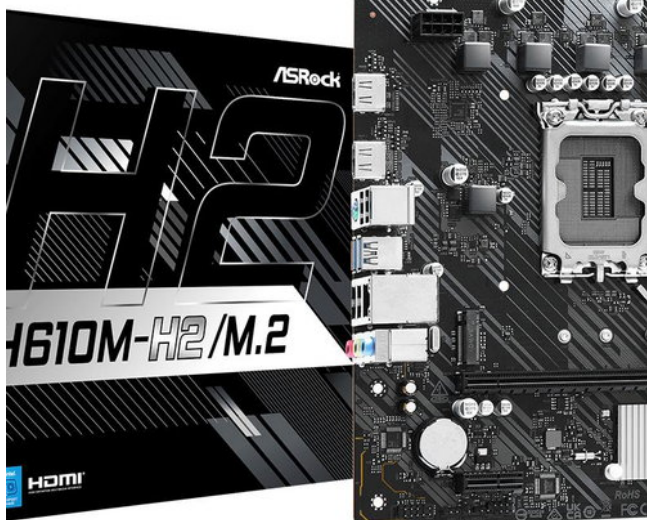

Mainboard
ASROCK Intel
H610 LGA1700
Micro-ATX
Memory DDR4
Memory slots 2
1xPCI-Express
3.0 1x 1xPCI-
Express 4.0 16x
1xM.2 2xHDMI
4xUSB 2.0
2xUSB 3.2
1xPS/2 1xRJ45
3xAudio port
H610M-H2/M.2

Modelis: H610M-H2/M.2

Gamintojas: ASROCK

EAN: 4710483946929

Prekės kodas: 553209

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt | info@shopro.lt | +370 693 39903

62.99€

Digi Power

Unlike traditional motherboards that use analog power, this motherboard uses a next generation digital PWM (Pulse-Width Modulation) design, which provides CPU Vcore voltage more efficiently and smoothly, so that the stability and lifespan of the motherboard is greatly enhanced.

Ultra M.2 32Gb/s (PCIe Gen3 x4)

The PCIe Gen3 x4 Ultra M.2 interface pushes data transfer speeds up to 32Gb/s.

Auto Driver Installer

No need to worry about lack of disk drive! Asrock preinstall LAN driver to ensure that you are able to install all drivers needed in an easier way than using SCD.

- step1: Install Auto Driver Installer
- step2: Update drivers needed
- step3: Done!

Dual HDMI Outputs

Equipped with two of the most widely used HDMI connectors, enjoy better multi-monitor compatibility and an easy setup experience.

HDMI 4k @60Hz

Supports the most recent HDMI 4K 60Hz graphics output specification. With the larger bandwidth and increased frame rate, the motion on your screen becomes more fluid and less blurry.

- Supports 14th, 13th & 12th Gen Intel® Core™ Processors (LGA1700)
- 3+1+1 Phase Power Design
- 2 x DDR4 DIMMs
- Supports Dual Channel, up to 3200

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt | info@shopro.lt | +370 693 39903

- 1 PCIe 4.0 x16, 1 PCIe 3.0 x1
- Graphics Output Options: 2 HDMI
- Realtek ALC897 7.1 CH HD Audio Codec
- 4 SATA3, 1 Ultra M.2 (PCIe Gen3 x4)
- 4 USB 3.2 Gen1 (2 Rear, 2 Front)
- 6 USB 2.0 (4 Rear, 2 Front)
- Realtek Gigabit LAN
- Supports ASRock Auto Driver Installer

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

The specification is subject to change without notice in advance. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.

The above user interface picture is a sample for reference. The actual user interface may vary with the updated software version.

Summary: Asrock H610M-H2/M.2. Processor manufacturer: Intel, Processor socket: LGA 1700, Compatible processor series: Intel Core i3 12th Gen, Intel Core i3 13th Gen, Intel Core i3 14th Gen, Intel Core i5 12th Gen,.... Supported memory types: DDR4-SDRAM, Maximum internal memory: 64 GB, Memory slots type: DIMM. Supported storage drive interfaces: M.2, SATA III, Supported storage drive types: HDD & SSD. Ethernet interface type: Fast Ethernet, Gigabit Ethernet, LAN controller: Realtek RTL8111H. Component for: PC, Motherboard form factor: micro ATX, Motherboard chipset family: Intel | Vendor Homepage: <https://www.asrock.com/mb/Intel/H610M-H2M.2/index.asp> | Audio chip: Realtek ALC897 | Audio output channels: 7.1 | Certification: - FCC, CE - ErP/EuP ready (ErP/EuP ready power supply is required) | Component for: PC | Motherboard chipset: Intel H610 | Motherboard chipset family: Intel | Motherboard form factor: micro ATX | Product colour: Multicolour | Windows operating systems supported: Windows 10 x64/Windows 11 x64 | Compatible processor series: in/Intel Core i3 12th Gen/Intel Core i3 13th Gen/Intel Core i3 14th Gen/Intel Core i5 12th Gen/Intel Core i5 13th Gen/Intel Core i5 14th Gen/Intel Core i7 12th Gen/Intel Core i7 13th Gen/Intel Core i7 14th Gen/Intel Core i9 12th Gen/Intel Core i9 13th Gen | Processor manufacturer: Intel | Processor socket: LGA 1700 | ECC compatibility: ECC & Non-ECC | Maximum internal memory: 64 | Memory channels: Dual-channel | Memory slots type: DIMM | Number of memory slots: 2 | Supported memory clock speed (max): 3200 | Supported memory types: DDR4-SDRAM | Unbuffered memory: Yes |

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shoppro.lt | info@shoppro.lt | +370 693 39903

Supported storage drive interfaces: M.2,SATA III | Supported storage drive types: HDD & SSD | HDCP: Yes | 12V power connector: Yes | ATX Power connector (24-pin): Yes | Chassis intrusion connector: Yes | CPU fan connector: Yes | EPS power connector (8-pin): Yes | Front panel audio connector: Yes | Number of chassis fan connectors: 1 | Number of CPU fan connectors: 1 | Number of SATA III connectors: 4 | TPM connector: Yes | USB 2.0 connectors: 1 | USB 3.2 Gen 1 (3.1 Gen 1) connectors: 1 | Ethernet LAN (RJ-45) ports: 1 | HDMI ports quantity: 2 | Line-in: Yes | Microphone in: Yes | PS/2 ports quantity: 1 | USB 2.0 ports quantity: 4 | USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity: 2 | Ethernet interface type: Fast Ethernet/Gigabit Ethernet | Ethernet LAN: Yes | LAN controller: Realtek RTL8111H | Wi-Fi: No | Number of M.2 (M) slots: 1 | PCI Express x1 (Gen 3.x) slots: 1 | PCI Express x16 (Gen 4.x) slots: 1 | BIOS memory size: 128 | BIOS type: UEFI AMI | Depth: 193 | Width: 220 | Product Net Weight: 0.5 | Shipping Box Height: 51 | Unit Calculated Volume: 0.004511 | Unit Calculated Weight: 0.758 | Units per Shipping Box: 20 | Model: H610M-H2/M.2