


D-Link AX3000 Wi-Fi 6 Dual-Band PoE Outdoor Access Point

Gamintojas: **D-LINK** · Modelis: **DAP-X3060OU** · EAN: **790069473586** · Prekės kodas: **568153**

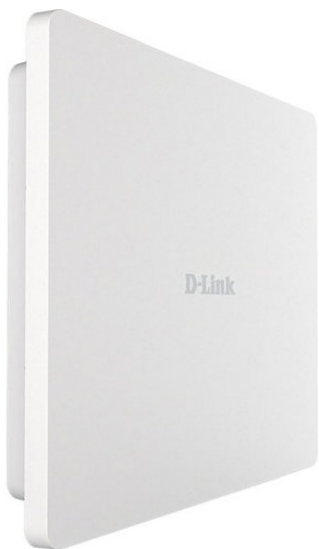

280,90 €

Kaina su PVM

Be PVM: **232,15 €**

Neturime



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ IP68 water and dust-proof housing for outdoor environments
- ✓ Weather resistant from temperatures between -30°C and 60°C
- ✓ Breathable pores to repel liquid water while allowing for heat and humidity dissipation
- ✓ Easy to manage with D-Link's centralized management software-based solution, Nuclias Connect
- ✓ Wi-Fi 6 delivers greater network efficiency and lower latency, with nearly four times the capacity of previous Wi-Fi standards
- ✓ Band steering intelligently manages users, pushing them onto the higher radio frequency when possible



Aprašymas

Nuclias Connect AX3000 Outdoor Access Point

The DAP-X3060OU delivers high performance Wi-Fi 6 speeds, enhanced capacity, interference-free coverage, and simple management via Nuclias Connect

Techninė specifikacija

Features	
2.4 GHz	Yes
5 GHz	Yes
6 GHz	No
Maximum data transfer rate	3000 Mbit/s
Maximum data transfer rate (2.4 GHz)	574 Mbit/s
Maximum data transfer rate (5 GHz)	2402 Mbit/s
Ethernet LAN data rates	10,100,1000,2500 Mbit/s
Frequency band	2.4 - 5 GHz
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3az, IEEE 802.3u
MIMO	Yes
MIMO type	Multi User MIMO
Fast roaming	Yes
Security	
Security algorithms	64-bit WEP, 128-bit WEP, SSID, WEP, WPA, WPA2, WPA3
MAC address filtering	Yes
Remote Authentication Dial-In User Service (RADIUS)	Yes
Ports & interfaces	
Ethernet LAN (RJ-45) ports	1
USB 2.0 ports quantity	0
Power	
Power over Ethernet (PoE)	Yes
Power consumption (max)	16.7 W
Design	
Placement	Wall
Product colour	White
Antenna	
Antenna type	Internal
Antennas quantity	4
Antenna gain level (max)	7.9 dBi
Weight & dimensions	
Width	277 mm
Depth	50 mm

Height	240 mm
--------	--------

Weight	1.16 kg
--------	---------

Packaging content

Quantity per pack	1 pc(s)
-------------------	---------

Operational conditions

Operating relative humidity (H-H)	10 - 90%
-----------------------------------	----------

Operating temperature (T-T)	-30 - 60 °C
-----------------------------	-------------

Storage temperature (T-T)	-30 - 65 °C
---------------------------	-------------

Storage relative humidity (H-H)	5 - 95%
---------------------------------	---------

Matmenys ir svoris

Matmenys (I × P × A)	5,00cm × 24,00cm × 28,00cm
----------------------	----------------------------