LG 55XS4P Signage Display Digital signage flat panel 139.7 cm (55") LED 4000 cd/m² Full HD Black WebOS 24/7

Gamintojas: **LG** · Modelis: **55XS4P-B** · EAN: **8806096166222** · Prekės kodas: **569244**



2,223.90€

Kaina su PVM

Be PVM: **1,837.93€**


In Stock

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ UL Verified Display Anti-discoloration Characteristics
- ✓ Resolution : 1,920 × 1,080 (FHD)
- ✓ Brightness : 4,000 nit (Typ.), 3,200 nit (Min.)
- ✓ Portrait / Landscape
- ✓ Space Efficiency

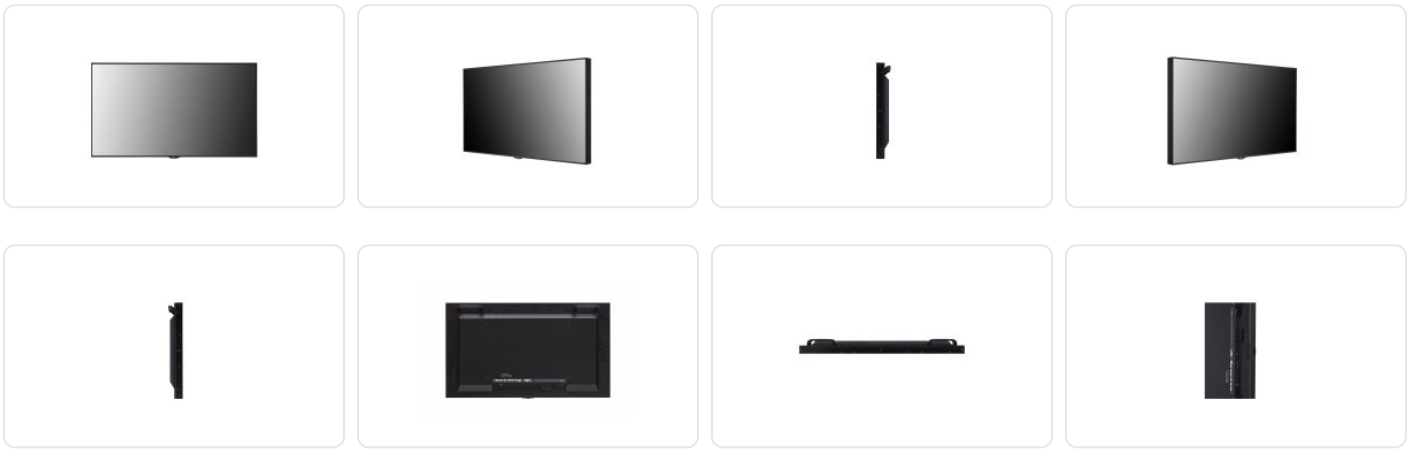

Aprašymas

Attract Passing Customers with a Bright Display Presented Through a Window

World’s First UL Verification for Display Anti-Discoloration Characteristics

By focusing on the pain points of our customers, we obtained the world’s first UL Verification for Display Anti-Discoloration Characteristics. Our new technology helps prevent ‘screen-yellowing’, while safeguarding display quality and performance stability.

Window-facing Display

LG offers advanced technical solutions for cost-effective operations. The XS4P can maintain an astonishing brightness of 4,000 nits, yet has lower power consumption compared to RGB panels at the same brightness level.

Brightness Beyond the Window

A window-facing display requires higher nits, as it is exposed to direct sunlight through a window. The XS4P is designed especially for window-facing environments, providing brilliant brightness. Vibrant and dynamic content displayed through the window will attract customers to your business, despite the viewers wearing polarized sunglasses.

High-performance with
webOS 6.0
Quad Core SoC (System-on-Chip) can execute several tasks at the same time without a separate media player. In addition, webOS 6.0 platform enhances not only user convenience with intuitive UI but also web-app integration with updated Node JS / Chromium version.

Remotely Managed, Real-time Mastery (Content Manager)

A significant advantage of window-facing displays over temporary displays is their ability to effortlessly manage frequently changing promotional content and pricing information. LG’s web-based content solution is intuitive and user-friendly, providing users with complete access to current and historical data anytime, anywhere, through their mobile devices. This allows users to monitor, adjust, and control the unit remotely in real-time.

Wide Range of Operating Temperature

The XS4P can be used under a wide range of operating temperature from 0℃ to 40℃.

Conformal Coating

The conformal coating with dust protection shields the circuit and power boards from dust, metal particles, moisture, and other contaminants, providing solid durability and long-term reliability.

Upgraded Quiet Mode

The XS4P addresses concerns about display noise. It features an Upgraded Quiet Mode that operates at 2,500 nits with minimal fan noise.

Professional Content Partners

Pairing the XS4P Series with LG SW solutions would enhance its utilization.

Convenient Installation with Calculated Precision

The XS4P is equipped with a Leveler Tool that shows users the tilt of the device, allowing for precise display installation. Additionally, the Horizontal Sensor Tool assists users in verifying the correct installation direction. The XS4P even provides warning messages for proper installation if it is installed incorrectly.

Techninė specifikacija

Display	
Display diagonal	139.7 cm (55")

Display technology	LED
Display resolution	1920 x 1080 pixels
Display brightness	4000 cd/m²
HD type	Full HD
Touchscreen	No
Panel type	IPS
LED backlight	Yes
LED backlighting type	Direct-LED
Native aspect ratio	16:9
Response time	9 ms
Contrast ratio (typical)	1000:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	16.7 million colours
Panel life	50000 h
Native refresh rate	60 Hz
Haze rate	3%
Ports & interfaces	
HDMI ports quantity	2
DisplayPorts quantity	2
USB port	Yes
HDMI input ports quantity	2
DVI-D ports quantity	1
DisplayPorts in	1
DisplayPorts out	1
USB ports quantity	1
USB version	2
USB connector type	USB Type-A
Ethernet LAN (RJ-45) ports	1
Audio (L/R) out	1
RS-232C	Yes
Infrared data port	Yes
Remote (IR) input	1
Remote (IR) output	1

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Audio	
Built-in speaker(s)	Yes
RMS rated power	20 W
Design	
Product design	Digital signage flat panel
Product colour	Black
Placement supported	Outdoor
VESA mounting	Yes
Orientation	Horizontal/Vertical
Screen shape	Flat
Panel mounting interface	600 x 400 mm
Bezel width (bottom)	1.2 cm
Bezel width (side)	9.9 mm
Bezel width (top)	1.2 cm
Bezel colour	Black
Performance	
Purpose	Retail
On Screen Display (OSD)	Yes
Number of OSD languages	22
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Czech, Danish, German, Dutch, English, Spanish, Finnish, French, Greek, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Swedish, Turkish
Operating hours (hours/days)	24/7
HDCP	Yes
HDCP version	1.4
Power	
Power consumption (typical)	375 W
Power consumption (off)	0.5 W
Power consumption (max)	400 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Heat dissipation	1280 BTU/h
Computer system	
Computer system	Yes
Computer system type	System on Chip (SoC)

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Internal memory	16 GB
Operating system installed	WebOS
Operating system version	6
Weight & dimensions	
Display width	1235.5 mm
Display depth	85.4 mm
Display height	709.4 mm
Display weight	26 kg
Packaging data	
Package width	1360 mm
Package depth	844 mm
Package height	231 mm
Package weight	31.2 kg
Packaging content	
Remote control included	Yes
Cables included	AC, HDMI
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	10 - 80%
Network	
Ethernet LAN	Yes
Features	
Suitable for outdoor use	Yes
Heat dissipation (max)	1365 BTU/h
Technical details	
Introduction year	24
Other features	
Manual	Yes
Matmenys ir svoris	
Matmenys (I × P × A)	135.00cm × 22.00cm × 84.00cm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Gamintojo ir saugos informacija

MANUFACTURER

LG Electronics Inc.
Magokjungang 10-ro 10, 07796 Gangseo-gu, Seoul, KR
lg.com

EU RESPONSIBLE PERSON

LG Electronics Deutschland
Alfred-Herrhausen-Allee 45721, 65760 Eschborn, DE
lg.com

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt