


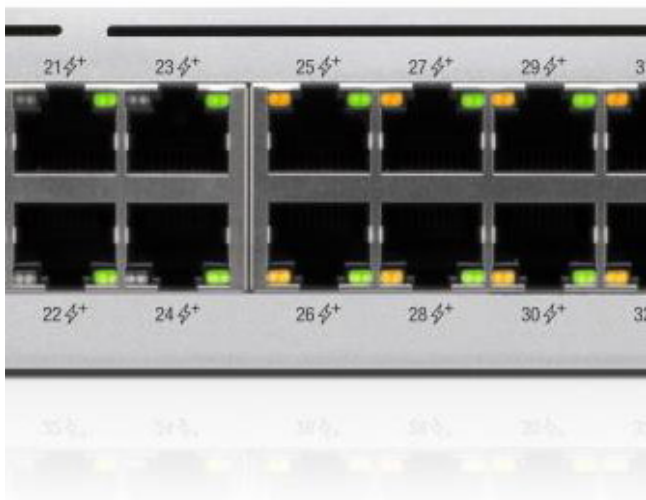

Switch UBIQUITI USW-PRO-48- POE Type L3 Rack 48x10Base-T 100Base-TX 1000Base-T 4xSFP PoE+ ports 48 600 Watts USW-PRO- 48-POE

Modelis: USW-PRO-48-POE

Gamintojas: UBIQUITI

EAN: 817882027656

Prekės kodas: 580852

1,148.99€

Second-Generation UniFi Switching

We've redesigned our UniFi Switches from the ground up.

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt | info@shopro.lt | +370 693 39903

Near Silent Cooling

Our new airflow design reduces the need for fan usage.

Powerful Hardware and Software

UniFi Switches offer a variety of features, including 10G SFP+ ports, PoE+ or PoE++ support, and Layer 3* switching capabilities.

Redundant Power System

UniFi SmartPower RPS, USP-RPS, is our PSU failover system.

Power Supply Failure

In the event of a UniFi switch power supply failure, the USP-RPS automatically supplies redundant power to the failed device.

UniFi SmartPower

One UniFi SmartPower device can support up to 6 devices until the failed device is replaced.

Touchscreen Display

The 1.3" touchscreen display allows easy monitoring and quick troubleshooting.

Summary: Ubiquiti UniFi Pro 48-Port PoE. Switch type: Managed, Switch layer: L2/L3. Basic switching RJ-45 Ethernet ports type: Gigabit Ethernet (10/100/1000), Basic switching RJ-45 Ethernet ports quantity: 48. Full duplex. Switching capacity: 176 Gbit/s. Networking standards: IEEE 802.3af, IEEE 802.3at. DC input voltage: 44 - 57 V. Power over Ethernet (PoE). Rack mounting, Form factor: 1U | Vendor Homepage: <https://switch.ui.com/gen2/> | Switch layer: L2/L3 | Switch type: Managed | Basic switching RJ-45 Ethernet ports quantity: 48 | Basic switching RJ-45 Ethernet ports type: Gigabit Ethernet (10/100/1000) | SFP+ module slots quantity: 4 | 10G support: Yes | Auto MDI/MDI-X: Yes | Auto-sensing: Yes | Flow control support: Yes | Full duplex: Yes | Networking standards: IEEE 802.3af/IEEE 802.3at | Port mirroring: Yes | Spanning tree protocol: Yes | VLAN support: Yes | Forwarding rate: 130.944 | Jumbo frames support: Yes | Static route: Yes | Switching capacity: 176 | Throughput: 88000 | Authentication type: IEEE 802.1x,RADIUS | DHCP features: DHCP server | Form factor: 1U | LED indicators: Activity/Link/PoE/Speed/System | Product colour: Silver | Rack mounting: Yes | AC input frequency: 50 - 60 | AC input voltage: 100 - 240 | DC input voltage: 44 - 57 | Input current: 11.54 | Number of power supply units: 1 | Power supply included: Yes | Power over Ethernet

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt | info@shopro.lt | +370 693 39903

(PoE): Yes | Power over Ethernet (PoE) power per port: 64 | Power over Ethernet plus (PoE+) ports quantity: 40 | Total Power over Ethernet (PoE) budget: 600 | Operating relative humidity (H-H): 10 - 90 | Operating temperature (T-T): -5 - 40 | Depth: 399.6 | Height: 43.7 | Weight: 6250 | Width: 442.4 | Certification: CE, FCC, IC | Harmonized System (HS) code: 85176990 | Model name: USW-PRO-48-POE | Units per Pallet: 0 | Units per Shipping Box: 2 | Unit Calculated Volume: 0.03617 | Unit Calculated Weight: 7.35