

iiyama ProLite XUB2797HSN-W2 kompiuterio monitorius 68,6 cm (27") 1920 x 1080 pikseliai „Full HD“ LED Balta

Gamintojas: IIYAMA · Modelis: XUB2797HSN-W2 · EAN: 4948570124992 · Prekės kodas: 583104



220,90 €

Kaina su PVM

Be PVM: 182,56 €

Sandėlyje




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 68,6 cm (27") Balta
- ✓ Aukščio reguliavimas 15 cm Įmontuoti garsiakalbiai
- ✓ USB aukštakrypčio prievado tipas: C tipo USB HDMI HDMI versija: 1.4 „DisplayPort“ kiekis: 1
- ✓ Ekranas forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 100 Hz Reakcijos laikas: 1 ms Atsako trukmė (MPRT): 1 ms
- ✓ 1920 x 1080 pikseliai „Full HD“ Skydo tipas: IPS
- ✓ Energijos vartojimo efektyvumo klasė (SDR): E ErP, TCO CE, EAC, PSE, REACH, RoHS, TÜV mark, UKCA, VCCI, WEEE
- ✓ Garantinis laikotarpis: 5 metai

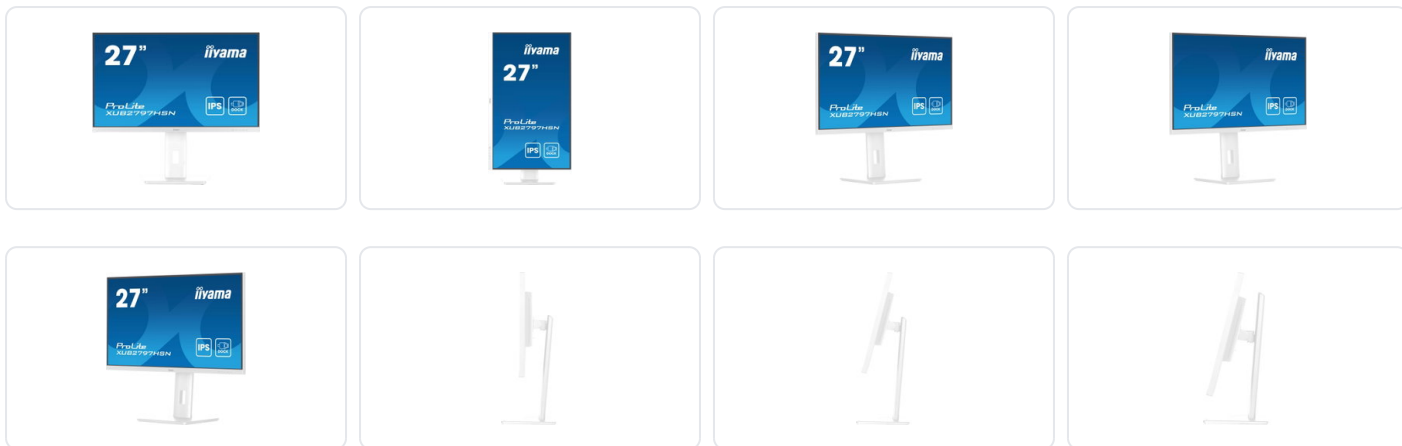



Aprašymas

Equipped with a USB-C dock connector, the XUB2797HSN allows you to simplify your workspace by using a single cable to both send signal from your notebook to your monitor and power and charge the notebook from the monitor. Additionally, if your monitor is connected to the Internet with a LAN cable, your notebook will automatically be connected to the network as well. Thanks to a DisplayPort output you can easily extend your desktop by creating a double-monitor set-up. Supplied with a 150mm height-adjustable stand featuring pivot and swivel functions, the XUB2797HSN allows you to easily adjust the screen position to your preferences. Available also without USB-C dock: XUB2797QSU-W2 .

Techninė specifikacija

Display	
Display diagonal	68.6 cm (27")
Display resolution	1920 x 1080 pixels
Native aspect ratio	16:9
Display technology	LED
Touchscreen	No
HD type	Full HD
Panel type	IPS
Response time	1 ms
Screen shape	Flat
Contrast ratio (typical)	1000:1
Maximum refresh rate	100 Hz
Display number of colours	16.7 million colours
Display brightness (typical)	300 cd/m ²
Response time (MPRT)	1 ms
Display surface	Matt
Contrast ratio (dynamic)	80000000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Pixel pitch	0.311 x 0.311 mm
Horizontal scan range	30 - 110 kHz
Viewable size, horizontal	59.8 cm
Viewable size, vertical	33.6 cm

Display diagonal (metric)	68.6 cm
DDC/CI	Yes
Colour gamut standard	NTSC, sRGB
sRGB coverage (typical)	99%
NTSC coverage (typical)	72%
Performance	
AMD FreeSync	Yes
VESA Adaptive Sync support	Yes
Flicker-free technology	Yes
Low Blue Light technology	Yes
Multimedia	
Built-in speaker(s)	Yes
Built-in camera	No
Number of speakers	2
RMS rated power	4 W
Design	
Market positioning	Business
Product colour	White
Ports & interfaces	
Built-in USB hub	Yes
HDMI	Yes
Headphone out	Yes
USB hub version	3.2 Gen 1 (3.1 Gen 1)
USB upstream port type	USB Type-C
Number of downstream ports	4
Number of USB Type-C upstream ports quantity	1
USB Power Delivery (USB PD)	Yes
USB Power Delivery up to	65 W
HDMI ports quantity	1
HDMI version	1.4
DisplayPorts quantity	1
DisplayPort out quantity	1
DisplayPort out version	1.2
HDCP	Yes

Network	
Ethernet LAN	Yes
Ergonomics	
VESA mounting	Yes
Cable lock slot	Yes
Height adjustment	Yes
Panel mounting interface	100 x 100 mm
Cable management	Yes
Cable lock slot type	Kensington
Adjustable height (max)	15 cm
Pivot	Yes
Pivot angle	0 - 90°
Swivelling	Yes
Swivel angle range	-60 - 60°
Tilt adjustment	Yes
Tilt angle range	5 - 23°
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	Czech, German, English, Spanish, French, Italian, Japanese, Dutch, Polish, Russian
Power	
Energy efficiency class (SDR)	E
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	21.6 kWh
Power consumption (typical)	22 W
Power consumption (standby)	22 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Power supply type	Internal
Energy efficiency scale	A to G
Weight & dimensions	
Width (with stand)	611.5 mm
Depth (with stand)	209.5 mm
Height (with stand)	550.5 mm
Weight (with stand)	6 kg

Width (without stand)	611.5 mm
Depth (without stand)	209.5 mm
Height (without stand)	400.5 mm

Packaging data

Package width	679 mm
Package depth	130 mm
Package height	427 mm
Package weight	8.7 kg

Packaging content

Cables included	AC, HDMI, USB Type-C
-----------------	----------------------

Sustainability

Sustainability certificates	ErP, TCO
-----------------------------	----------


Other features

Packaging content	quick start guide, safety guide
Weight	6 kg
Width	611.5 mm
Depth	209.5 mm
Warranty period	5 year(s)
Compliance certificates	CE, EAC, PSE, REACH, RoHS, TÜV mark, UKCA, VCCI, WEEE
Manufacturer warranty	5 years (for details and eligible countries please check the Warranty section of our website)
Ethernet LAN (RJ-45) ports	1
User controls	picture adjust (brightness, contrast, Eco, ACR, OD, MBR, AdaptiveSync), colour settings (i-Style colour, blue light reducer, colour temp., user preset), OSD (OSD H. position, OSD V. position, OSD rotate, OSD time), language, recall, miscellaneous 1 (sharp and soft, video mode adjust, opening logo, RGB range), miscellaneous 2 (USB BC, MST, USB, LED, display information, MAC address), input select, audio settings (volume, mute)
Control panel	Power, Menu, Adjustment/Volume, Adjustment/Shortcut Menu, Input/Exit

Matmenys ir svoris

Matmenys (I × P × A)	14,00cm × 69,00cm × 44,00cm
Svoris	8,27kg

Energijos efektyvumas ir ekologinis projektavimas



2019/10/23

Energijos efektyvumo klasė

E A-G

- › [Energijos etiketė](#)
- › [Gaminio informacijos lapas](#)
- › [EPREL duomenų bazė](#)

Dokumentai ir vaizdo įrašai

- › [Naudojimo instrukcija](#)
- › [Gaminio lankstinukas](#)
- › [Vaizdo įrašas](#) youtube.com/watch?v=ONkUIO5F2KI

Gamintojo ir saugos informacija

GAMINTOJAS

iiyama International

Wijkmeesterstraat 8, 2131 HA Hoofddorp, NL

iiyama.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt