LG 43UL3Q-E Signage Display Digital signage flat panel 109.2 cm (43") LED Wi-Fi 350 cd/m² 4K Ultra HD Black WebOS 16/7

Gamintojas: **LG** · Modelis: **43UL3Q-E** · EAN: **8806096497524** · Prekės kodas: **596963**



601.90€

Kaina su PVM



Be PVM: **497.44€**


In Stock

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Brightness : 350 nit (Typ.)
- ✓ Face Up/Down with Tilt Support
- ✓ High-Performance with webOS 6.1
- ✓ Enhanced Security
- ✓ Sustainability for ESG







Aprašymas

Superb Picture Quality with Ultra HD Resolution

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

With the resolution of UHD, it makes the color and details of the contents vivid and realistic. In addition, the wide viewing angle provides clear contents.

High-Performance with LG webOS 6.1

LG webOS 6.1 is available on the UL3Q series for smooth execution of multiple tasks. The LG webOS smart signage platform enhances user convenience with an intuitive GUI*.

Easy Installation with Uniform Bezel Design

The UL3Q series features perfectly balanced horizontal and vertical bezels, creating a visually harmonious display solution. Its specialized design simplifies installation in retail environments while delivering a truly immersive viewing experience. The sophisticated, symmetrical bezels enhance the aesthetic appeal of any space, transforming ordinary displays into elegant focal points.

Adaptive Viewing Experience

Experience enhanced flexibility with the UL3Q's innovative Face Up/Down tilt support. Whether mounted high or low, each display can adjusted to better meet viewers at eye level, promoting maximum engagement regardless of installation height. This versatility optimizes both spatial efficiency and visual comfort, delivering clear information from various viewing angles.

Remote Monitoring and Control

This web-based monitoring solution is user-friendly and allows the user to be at ease. It enables the user to have full access anywhere at anytime from their mobile phone & PC under network-accessible environment while having access to both current and past data. It allows the user to monitor the unit, make adjustments and control the unit remotely in real time.

Built-In Brightness Sensor

The UL3Q's front-mounted sensor automatically adjusts brightness to match various lighting conditions, helping to optimize viewing quality and energy efficiency without manual intervention. This adaptive feature helps maintain consistent display performance while supporting power savings, delivering improved visual experience that responds to environmental changes.

Advanced Security Architecture

The UL3Q incorporates LG’s Enhanced Kernel Protection (EKP) technology, safeguarding critical data from unauthorized access and potential security threats. This commitment to information security is validated by the ISO/IEC 15408 Common Criteria EAL2 certification, providing businesses with the confidence that their sensitive content and operations remain protected in today’s challenging security landscape.

Award-Winning Sustainability

The UL3Q series embodies LG Display's ESG commitment: "Better Life for All." This company-wide dedication to environmental responsibility has earned the prestigious 2025 EcoVadis Platinum medal, placing us among the top 1% of global companies for sustainability excellence.

LG ConnectedCare

Maintenance is easy and fast with the optional LG ConnectedCare* service, a cloud service solution provided by LG. It remotely manages the status of displays in client workplaces for fault diagnosis and remote-control services, supporting the stable operation of clients' businesses.

Techninė specifikacija

Display

Display diagonal	109.2 cm (43")
Display technology	LED
Display resolution	3840 x 2160 pixels
Display brightness	350 cd/m²
HD type	4K Ultra HD
Touchscreen	No
Panel type	ADS
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	1000000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Colour saturation	80%
Rated lifetime	30000 h
Native refresh rate	60 Hz
Haze rate	1%
Ports & interfaces	
HDMI ports quantity	3
USB port	Yes
HDMI version	2.2/1.4
Ethernet LAN (RJ-45) ports	1
RS-232C	Yes
PC Audio out	Yes
Audio	
Built-in speaker(s)	Yes
Number of built-in speakers	2
RMS rated power	20 W
Design	
Product design	Digital signage flat panel
Product colour	Black
Placement supported	Indoor
VESA mounting	Yes
Orientation	Horizontal/Vertical

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Panel mounting interface	200 x 200 mm
Bezel width (bottom)	1.08 cm
Bezel width (side)	1.08 cm
Bezel width (top)	1.08 cm
Bezel colour	Black

Performance

Purpose	Commercial
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Czech, Danish, German, Dutch, English, Spanish, Finnish, French, Greek, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Swedish, Turkish
Operating hours (hours/days)	16/7
Web browser	Yes
webRTC support	Yes

Power

Power consumption (typical)	83 W
Power consumption (standby)	0.5 W
Power consumption (off)	0.5 W
Power consumption (max)	134 W
Power consumption (economy mode)	0.5 W
Energy efficiency class (SDR)	G
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	82.5 kWh
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Heat generation (typical)	283.208 BTU/h
Heat generation (max)	457.227 BTU/h

Computer system

Internal memory	8 GB
Operating system installed	WebOS
Operating system version	6.1

Weight & dimensions


Display width	965 mm
Display depth	59.1 mm
Display height	554.9 mm
Display weight	7.6 kg

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Packaging data	
Package width	1070 mm
Package depth	645 mm
Package height	113 mm
Package weight	9.7 kg
Packaging content	
Remote control included	Yes
Cables included	Power
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	10 - 80%
Sensors	
Gyroscope	Yes
Temperature sensor	Yes
Network	
Ethernet LAN	Yes
Wi-Fi	Yes
Technical details	
Compliance certificates	CB, CE, Electromagnetic Compatibility (EMC), Federal Communications Commission (FCC)
Other features	
Power supply type	Internal
Matmenys ir svoris	
Matmenys (I × P × A)	107.00cm × 11.00cm × 65.00cm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Energijos efektyvumas ir ekologinis projektavimas

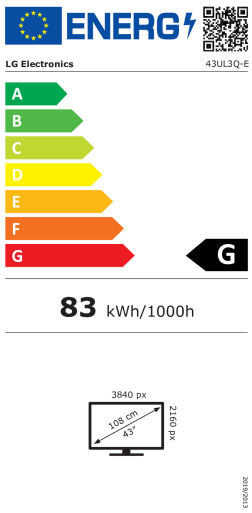

Energijos efektyvumo klasė G A–G

- Energijos etiketė
- Gaminio informacijos lapas
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- Product leaflet

Gamintojo ir saugos informacija

MANUFACTURER

LG Electronics Inc.
Magokjungang 10-ro 10, 07796 Gangseo-gu, Seoul, KR
lg.com

EU RESPONSIBLE PERSON

LG Electronics Deutschland
Alfred-Herrhausen-Allee 45721, 65760 Eschborn, DE
lg.com

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt