
Mainboard ASROCK AMD B650 SAM5 Micro-ATX Memory DDR5 Memory slots 2 1xPCI-E 2xPCI-Express 4.0 1x 1xPCI-Express 4.0 16x 1xM.2 1xHDMI 1xDisplayPort 1xAudio-In 1xAudio-Out 1xMicrophone 2xUSB 2.0 3xUSB 3.2 1xUSB-C 1xRJ45 B650M-H/M.2+

Gamintojas: **ASROCK** · Modelis: **B650M-H/M.2+** · EAN: **4710483943768** · Prekės kodas: **597725**

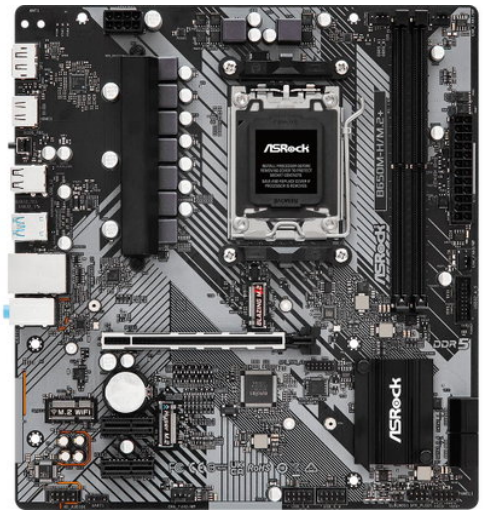

98,91 €

Kaina su PVM

Be PVM: **81,74 €**

Sandėlyje

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt






Aprašymas

Optimized VRM Design
Featuring sturdy components optimized for AMD Ryzen™ 7000X3D series processors, offering enhanced performance for gamers.

6 Layer PCB
The 6 Layer PCB provides stable signal traces and power shapes delivering lower temperature and higher energy efficiency, giving a stable and reliable system.

Reinforced Steel Slot
[PCIe 4.0 Version]
The reinforced steel slot is capable of supporting PCI Express 4.0 standard. The various benefits include:
✔ Extra anchor points
✔ Stronger latch

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

✔ Ensure signal stability
✔ Make sure heavy graphics cards to be well-installed.

Audio That Matters
Whether you are using headphones, a headset, external or internal speakers, via USB, Wi-Fi, analog output or even HDMI, Nahimic Audio offers you the most engaging listening experience, vibrant and rich with details.

Enhance Communication Quality
The Powerful algorithms to ensure the best noise-free conversation, giving a constant vocal level no matter the distance from your mic. The Nahimic audio engine dynamically clear the sound and remove interference noise and lower the voice variation. Result is a better comprehension and less fatigue.
●Static Noise Suppression
●Echo Cancellation
●Lateral Sound Cancellation
●Voice Stabilizer

Ultimate Gaming Experience

●Sound Tracker
The Sound Tracker is a visual indicator that points out the directions from which predominant sounds are coming. Each sound is properly positioned in 360° on a radar for a full immersion during the game.

●Works on any devices!
Enjoy the vibrant and high-quality Surround Sound on all your favorite audio devices: Jack, USB, Bluetooth, HDMI, S/PDIF. Nahimic is compatible with all of your favorite audio tools and ensures the best sound with any of them. Nahimic measure and improve to optimize our technology and offer you the best experience.

PCIe Gen5 Blazing M.2
The Blazing M.2 accommodates the latest PCI Express 5.0 standard to perform twice the bandwidth compared to previous generation, with a breathtaking 128Gb/s transfer speed, it is ready to unleash the full potential of future ultrafast SSDs.

USB 3.2 Gen1 Type-C
USB 3.2 Gen1 Type-C delivers up to 5 Gbps data transfer rate and next generation reversible USB design to the rear panel of computer case.

M.2 (KEY E) For WiFi
Besides the onboard LAN port, users may also choose wireless connections by M.2 (Key E) slot.

Auto Driver Installer
Optical drive or driver DVD is no longer needed! ASRock motherboard already has its Ethernet driver prepacked in BIOS ROM, once finish installing the operation system, simply follow the instructions and allow ADI to download and install all necessary drivers automatically!
Step1: Install Auto Driver Installer
Step2: ADI will automatically download and install all necessary drivers.
Step3: Done!

BIOS Flashback
Get the most convenient BIOS flashing with just a simple click. Users can easily achieve the latest BIOS support with a USB and power supply, No CPU, RAM or other components required.

- Supports AMD Socket AM5 Ryzen™ 8000 and 7000 Series Processors
- 6+1+1 Power Phase Dr.MOS, Supports up to 120W CPU
- 2 x DDR5 DIMMs, supports up to 6400+(OC)

- 1 PCIe 4.0 x16, 2 PCIe 4.0 x1, 1 M.2 Key E for WiFi
- Integrated AMD RDNA™ 2 Graphics *
- Graphics Output Options: HDMI, DisplayPort
- Realtek ALC897 7.1 CH HD Audio Codec, Nahimic Audio
- 4 SATA3, 1 Blazing M.2 (PCIe Gen5 x4), 1 Hyper M.2 (PCIe Gen4 x4)
- 6 USB 3.2 Gen1 (3 Rear, 1 Rear Type-C, 2 Front)
- Realtek Gigabit LAN

Summary: Asrock B650M-H/M.2+. Processor manufacturer: AMD, Processor socket: Socket AM5. Supported memory types: DDR5-SDRAM, Maximum internal memory: 96 GB, Memory slots type: DIMM. Supported storage drive interfaces: M.2, SATA III, RAID levels: 0, 1, 10. Graphics card family: AMD. Ethernet interface type: Gigabit Ethernet, LAN controller: Realtek RTL8111H | Vendor Homepage: https://www.asrock.com/MB/AMD/B650M-HM.2+/index.asp#Overview | Motherboard chipset: AMD B650 | Component for: PC | Motherboard form factor: micro ATX | Audio output channels: 7.1 | Motherboard chipset family: AMD | Windows operating systems supported: Windows 10 x64/Windows 11 x64 | Processor manufacturer: AMD | Processor socket: Socket AM5 | Maximum number of SMP processors: 1 | Supported memory types: DDR5-SDRAM | Number of memory slots: 2 | Memory slots type: DIMM | Memory channels: Dual-channel | ECC compatibility: ECC & Non-ECC | Maximum internal memory: 96 | Unbuffered memory: Yes | Supported storage drive interfaces: M.2,SATA III | Number of storage drives supported: 6 | RAID support: Yes | RAID levels: 0/1/10 | Graphics card family: AMD | USB 2.0 connectors: 2 | USB 3.2 Gen 1 (3.1 Gen 1) connectors: 1 | Number of SATA III connectors: 4 | Front panel audio connector: Yes | ATX Power connector (24-pin): Yes | CPU fan connector: Yes | TPM connector: Yes | USB 2.0 ports quantity: 2 | USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity: 3 | USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity: 1 | Ethernet LAN (RJ-45) ports: 1 | HDMI ports quantity: 1 | DisplayPorts quantity: 1 | DisplayPort version: 1.4 | Line-in: Yes | Microphone in: Yes | Ethernet LAN: Yes | Ethernet interface type: Gigabit Ethernet | LAN controller: Realtek RTL8111H | Wi-Fi: No | PCI Express x1 (Gen 4.x) slots: 2 | PCI Express x16 (Gen 4.x) slots: 1 | Number of M.2 (M) slots: 1 | BIOS type: UEFI AMI | Width: 244 | Depth: 226 | Unit Calculated Weight: 1.11 | Product Net Weight: 1 | Unit Calculated Volume: 0.005513 | Units per Shipping Box: 10 | Unit Width: 26.2 | Shipping Box Height: 29.5 | Unit Depth: 28 | Unit Height: 6.2 | Name: MB AMD B650 SAM5 MATX/B650M-H/M.2+ ASROCK | Model: B650M-H/M.2+

Techninė specifikacija

Matmenys ir svoris	
Matmenys (I × P × A)	28,00cm × 26,00cm × 6,00cm