


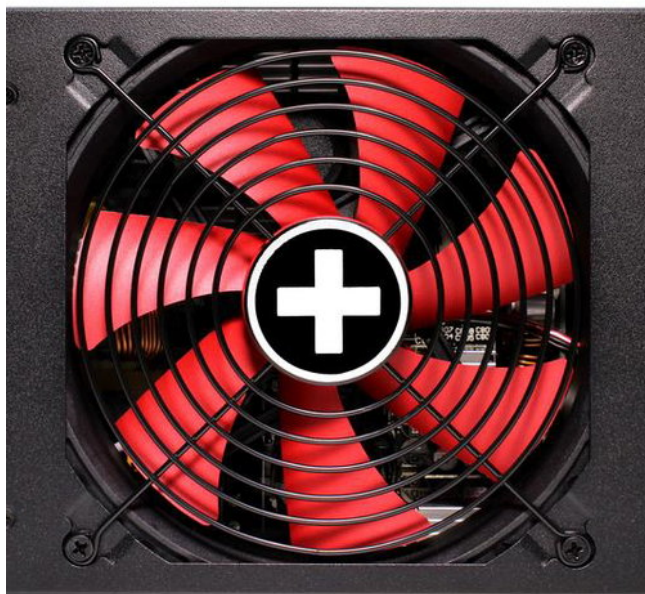

Power Supply XILENCE 1250 Watts Efficiency 80 PLUS GOLD PFC Active XN178

Modelis: XN178

Gamintojas: XILENCE

EAN: 4044953503511

Prekės kodas: 604020

190.99€

The fully modular power supplies of the X+ series are capable of absorbing high load peaks above the normal rated power in the shortest possible time and comply with Intel's Design Guide 3.0. Thus, the power supplies are ideally suited for driving the latest and most powerful gaming graphics cards with PCI Express 5 specifications. An 80+ Gold certification confirms a high efficiency and energy efficiency of this power supply series. Six different protection circuits (OCP, OVP, UVP, SCP, OPP, OTP) ensure safe operation even in heated gaming sessions. The fans of the ATX 3.0 power supplies run with Fluid Dynamic Bearing technology and are very quiet. In addition, they convince with an extremely long durability and their excellent cooling performance. All of these specifications make the affordable Performance X+ series ideal for use with the latest gaming PC systems.

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt | info@shopro.lt | +370 693 39903

Summary: Xilence XP1250MR9.2. Total power: 1250 W, AC input voltage: 100 - 240 V, AC input frequency: 50/60 Hz. Motherboard power connector: 20+4 pin ATX, Motherboard power cable length: 65 cm, Cabling type: Fully-Modular. Purpose: PC, Power supply unit (PSU) form factor: ATX, 80 PLUS certification: 80 PLUS Gold. Product colour: Black, Red, Cooling type: Active, Fan diameter: 14 cm. Compliance certificates: RoHS, WEEE | Vendor Homepage: <https://www.xilence.net/en/power-supplies/235> | AC input frequency: 50/60 | AC input voltage: 100 - 240 | Efficiency: 89 | Input current: 15 | Max output current (+12V): 104.1 | Max output current (+3.3V): 20 | Max output current (+5V): 20 | Max output current (+5Vsb): 3 | Max output current (-12V): 0.3 | Power Factor Correction (PFC) type: Active | Power protection features: Over current/Over power/Over voltage/Short circuit/Under voltage | Total power: 1250 | Cabling type: Fully-Modular | CPU power connector (4+4 pin): Yes | Motherboard power cable length: 650 | Motherboard power connector: 20+4 pin ATX | Number of SATA power connectors: 12 | PCI Express power connectors (6+2 pin): 3 | PCI Express power connectors (8-pin): 1 | 80 PLUS certification: 80 PLUS Gold | ATX version: 3.0 | Bearing technology: FDB | Power supply unit (PSU) form factor: ATX | Purpose: PC | Cooling type: Active | Fan diameter: 140 | Number of fans: 1 | Product colour: Black/Red | Compliance certificates: RoHS/WEEE | Depth: 180 | Height: 86 | Width: 150 | Package type: Box | Sustainability certificates: ErP | Sustainability compliance: Yes | Model name: XP1250MR9.2 | Units per Shipping Box: 1 | Unit Calculated Volume: 0.006082 | Unit Calculated Weight: 3.33