EIZO FlexScan EV2495-WT computer monitor 61.2 cm (24.1") 1920 x 1200 pixels WUXGA LCD White

Gamintojas: **EIZO** · Modelis: **EV2495-WT** · EAN: **4995047056546** · Prekės kodas: **604533**



661.89€

Kaina su PVM

Be PVM: **547.02€**

In Stock

Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 61.2 cm (24.1") LCD IPS
- ✓ WUXGA 1920 x 1200 pixels 16:10
- ✓ 60 Hz 5 ms 350 cd/m² 1000:1
- ✓ Flicker-free technology
- ✓ C 12 kWh 11.6 W









Aprašymas

Streamlined Connection with USB Type-C

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

The monitor is equipped with a USB Type-C connection that allows you display video, playback audio, transmit USB signals, supply power to connected devices, and even transmit a network signal. This convenient multi-purpose connectivity makes it faster and easier to connect your laptop when moving between workstations or working away from the office.

70 W Power Delivery

The 70 W power delivery via USB Type-C reliably charges small desktop PCs or laptops such as a Microsoft Surface. This eliminates the need for a laptop's bulky power supply unit, freeing up space in your bag and on the desk.

Stable Network Connection

While many modern laptops are not equipped with a dedicated LAN port, the monitor has one directly built in for a stable wired connection. Connecting any laptop via USB Type-C allows access to the network through the monitor. This allows you to conduct conference calls or data transfers reliably and at high speed.

EIZO MAC Address Clone Utility software temporarily assigns the MAC address of a connected PC to the monitor, granting network access to authenticated devices, and preventing network access from unauthenticated devices.

Connecting Peripherals Directly

While modern laptops are becoming thinner and more portable, they often have limited connectivity options for peripherals. Connecting to the monitor via USB Type-C gives access to a hub with three USB Type-A and one USB Type-C ports for easily connecting an external keyboard, mouse, or web camera.

Efficient Multi-Screen Setup

The monitor's USB Type-C connection supports daisy chaining for easily connecting multiple monitors from a single video signal output. This allows you to effortlessly connect up to four screens and quickly view multiple applications simultaneously for boosting efficiency.

Aesthetically Pleasing Design

A monitor's aesthetic can go a long way in creating a more comfortable atmosphere. The monitor's minimalistic design and its ergonomic functions allow it to fit naturally in your work environment, whether you are at home or in the office.

Frameless and White

The monitor implements a virtually frameless design for a minimalistic aesthetic. In addition to sleek black, the cabinet is available in white for a color option that keeps your workspace feeling bright. Furthermore, EIZO provides white cables to match the cabinet for full color coordination.

Versatile Stand for Optimal Positioning

The stand has a wide adjustment range, featuring height adjustment, tilt and swivel. This allows the user to set the monitor to the perfect position. At maximum height, the user can also comfortably place a small laptop under the screen to save space in even the most limited workspaces. Furthermore, a high native resolution of 1920 x 1200 shows 11% more content than a conventional monitor with a full HD (1920 x 1080) resolution, reducing the need for frequent scrolling in some applications.

Reduce Cable Clutter with Daisy Chain

Cable management becomes easier with USB Type-C. Multiple monitors can be connected in a daisy chain using the short 1 meter cable, CC100, tidying up the back of your desk for an even cleaner office aesthetic.

Free Up Your Workspace with a Stand Bracket

The PCSK-03 is a VESA-compliant bracket for easily mounting a client, such as a thin client or mini PC to the back of the monitor. The space the client terminal previously occupied is now freed up allowing the users to make better use of their work area. The monitor stand can be adjusted freely, even with the client terminal attached.

Say Goodbye to Tired Eyes

The monitor is equipped with functions to help users concentrate on work by keeping their eyes comfortable throughout the day.

Auto Brightness Control

To prevent eye fatigue, a brightness sensor called Auto EcoView detects the changes in the ambient brightness that occurs throughout the day and automatically adjusts the screen to the ideal brightness level.

Clear View from All Angles

The monitor uses an LED-backlit IPS (in-plane switching) LCD panel with 178° viewing angle that minimizes color shift and contrast changes when viewing the screen at an angle. This means that two people sitting at the one computer can easily see the screen with high image quality.

Reduce Blue Light by 80%

In the visible light spectrum, blue light has wavelengths adjacent to ultraviolet light. Compared to the factory preset setting of 6500 K of typical LCD monitors, Paper Mode is closer to the spectral distribution with long reddish wavelengths so it reduces the amount of blue light, a cause of eye fatigue, and helps prevent eyestrain when reading documents. When used in conjunction with Auto EcoView dimming function, blue light can be reduced by as much as 80%.

Flicker-Free Viewing

Due to the way brightness is controlled on LED backlights, a small number of people perceive flicker on their screen which causes eye fatigue. The FlexScan EV2495 utilizes a hybrid solution to regulate brightness and make flicker unperceivable without any drawbacks like compromising color stability – even on low brightness settings.

Minimum Brightness of 1 cd/m2

In a dimly-lit work environment, a monitor with low brightness settings is more comfortable to use. With its LED backlight, the monitor is adjustable to approximately 1 cd/m² which is less than 1% of the maximum.

Non-Glare Panel

A non-glare panel reduces eye fatigue by dissipating reflective light that would otherwise make the screen difficult to view from different positions.

Additional Features

The monitor offers additional features and functions for promoting efficiency and comfort.

Multiple Connections

The monitor is equipped with a USB Type-C and three USB Type-A ports for easily connecting to multiple devices without the need for a docking station. This is convenient when using a laptop with limited USB ports or for streamlining connection to workstations in hot desking or home office environments. The monitor also has HDMI® and DisplayPort inputs for further flexibility.

Built-In KVM Switch for Multiple PC Operation

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

The monitor's USB Type-B and Type-C upstream ports have a built-in KVM function, allowing users to use a single mouse and keyboard for up to two connected PCs for an even cleaner workspace. Furthermore, the peripherals connected to the monitor's USB hub and its network connection switch to the selected PC for a smooth operation on the selected computer.

Hassle-Free Approach

The monitor's stand is equipped with a Quick Release button that allows you to detach the screen with a single touch. It also has a convenient carrying handle on the back for easily moving the monitor. Furthermore, the cable cover on the back of the stand allows you easily manage cables, keeping the work area free of clutter.

Front-Facing Speakers

The monitor has speakers incorporated into the minimalist front bezel, ensuring that sound is focused on the user and not on people behind the monitor.

Exceptional Image Reproduction

The monitor converts the data from an 8-bit input signal and selects the optimal gradations for smooth image display. Furthermore, each monitor is individually measured and adjusted at the factory prior to shipping for exceptional image quality out of the box.

Intelligent Software for Working Better

EIZO's Screen InStyle proprietary software is designed to help you manage multi-monitor setups effortlessly.

Streamlined Mouse Operation

The Mouse Pointer Utility function of EIZO's free Screen InsStyle software provides an easy-to-see visual indicator that helps you quickly locate the cursor. It also allows you to move the cursor freely between monitors without the barrier typical of conventional multi-monitor setups.

Techninė specifikacija

Display	
Display diagonal	61.2 cm (24.1")
Display resolution	1920 x 1200 pixels
Native aspect ratio	16:10
Display technology	LCD
Touchscreen	No
HD type	WUXGA
Panel type	IPS
Response time	5 ms
Screen shape	Flat
Contrast ratio (typical)	1000:1
Maximum refresh rate	60 Hz
Display number of colours	16.78 million colours
LED backlight	Yes

Backlight type	W-LED
Display brightness (typical)	350 cd/m²
Anti-glare screen	Yes
Supported graphics resolutions	640 x 480 (VGA), 720 x 400, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1600 x 1200 (UXGA), 1680 x 1050 (WSXGA+), 1920 x 1200 (WUXGA)
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Pixel pitch	0.27 x 0.27 mm
Pixel density	94 ppi
Viewable size, horizontal	51.8 cm
Viewable size, vertical	32.4 cm
Viewable size diagonal	61.1 cm
Digital horizontal frequency	31 - 76 kHz
Digital vertical frequency	59 - 61 Hz
Colour gamut standard	sRGB
Performance	
NVIDIA G-SYNC	No
AMD FreeSync	No
Flicker-free technology	Yes
Low Blue Light technology	Yes
Multimedia	
Built-in speaker(s)	Yes
Built-in camera	No
Number of speakers	2
RMS rated power	2 W
Design	
Market positioning	Office
Product colour	White
Feet colour	White
Ports & interfaces	
Built-in USB hub	Yes
HDMI	Yes
Headphone out	Yes
USB hub version	3.2 Gen 1 (3.1 Gen 1)
USB upstream port type	USB Type-B, USB Type-C

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Number of upstream ports	2
Number of USB Type-B upstream ports quantity	1
Number of USB Type-C upstream ports quantity	1
USB Type-A downstream ports quantity	3
USB Type-C downstream ports quantity	1
USB Type-C DisplayPort Alternate Mode	Yes
USB Power Delivery (USB PD)	Yes
USB Power Delivery up to	70 W
HDMI ports quantity	1
DisplayPorts quantity	1
Headphone outputs	1
Headphone connectivity	3.5 mm
Built-in KVM switch	Yes
HDCP	Yes
Network	
Ethernet LAN	Yes
Ergonomics	
VESA mounting	Yes
Cable lock slot	Yes
Height adjustment	Yes
Panel mounting interface	100 x 100 mm
Cable lock slot type	Kensington
Adjustable height (max)	18.2 cm
Pivot	Yes
Pivot angle	-90 - 90°
Swivelling	Yes
Swivel angle range	0 - 344°
Tilt adjustment	Yes
Tilt angle range	-5 - 35°
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	German, English, Spanish, French, Italian, Swedish
Power	
Energy efficiency class (SDR)	C
Energy consumption (SDR) per 1000 hours	12 kWh
Power consumption (typical)	11.6 W

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Power consumption (standby)	0.5 W
Power consumption (max)	156 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Energy efficiency scale	A to G
Operational conditions	
Operating temperature (T-T)	5 - 35 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	20 - 80%
Storage relative humidity (H-H)	10 - 90%
Weight & dimensions	
Width (with stand)	531 mm
Depth (with stand)	230 mm
Height (with stand)	356 mm
Weight (with stand)	7.6 kg
Width (without stand)	531 mm
Depth (without stand)	54 mm
Height (without stand)	344 mm
Weight (without stand)	4.9 kg
Packaging content	
Stand included	Yes
Cables included	AC, USB Type-C to USB Type-C
Quick start guide	Yes
Sustainability	
Sustainability certificates	ENERGY STAR, EPEAT Climate +, EPEAT Gold, TCO
Sustainability compliance	Yes
Other features	
Automatic brightness control	Yes
Warranty period	5 year(s)
Look-up table (LUT) bit depth	14
Compliance certificates	CB, CCC, CE, China RoHS, Federal Communications Commission (FCC), GS mark, ICES, PSE, RCM, RoHS, cTUVus, UKCA, VCCI, WEEE
Ethernet LAN data rates	10,100,1000 Mbit/s
Ethernet LAN (RJ-45) ports	1

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Certification	CE, UKCA, CB, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TCO Certified Generation 10, EPEAT 2018 (US), TÜV/Blue Low Light Content, TÜV/Flicker Free, RCM, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC


Logistics data

Harmonized System (HS) code	85285210

Matmenys ir svoris

Matmenys (I × P × A)	60.00cm × 47.00cm × 30.00cm

Energijos efektyvumas ir ekologinis projektavimas

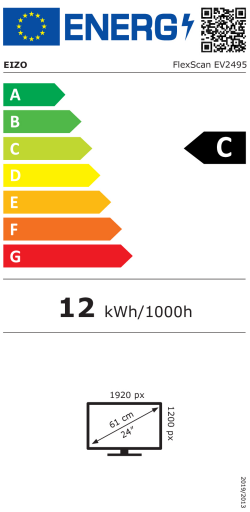

Energijos efektyvumo klasė C A-G

- Energijos etiketė
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- User manual
- Product leaflet

Gamintojo ir saugos informacija

MANUFACTURER

EIZO Corporation
Shimokashiwano 153, 924-8566 Hakusan, JP
eizoglobal.com

EU RESPONSIBLE PERSON

EIZO Europe GmbH
Belgrader Straße 2, 41069 Mönchengladbach, DE
eizo.de

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt