

iiyama ProLite T1721MSC-B3 kompiuterio monitorius 43,2 cm (17") 1280 x 1024 pikseliai SXGA Lietimui jautrus ekranas Stalo paviršius Juoda

Gamintojas: **IIYAMA CONSIGNMENT** · Modelis: **T1721MSC-B3** · EAN: **4948570127092** · Prekės kodas: **605965**



410,90 €

Kaina su PVM

Be PVM: **339,59 €**

Sandėlyje




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 43,2 cm (17") Juoda
- ✓ Įmontuoti garsiakalbiai
- ✓ HDMI
- ✓ Ekranas forma: Plokščias
- ✓ Maksimalus atnaujinimo dažnis: 75 Hz Reakcijos laikas: 5 ms
- ✓ 1280 x 1024 pikseliai SXGA Skydo tipas: TN
- ✓ Energijos vartojimo efektyvumo klasė (SDR): E ErP CE, cULus, REACH, RoHS, VCCI, WEEE

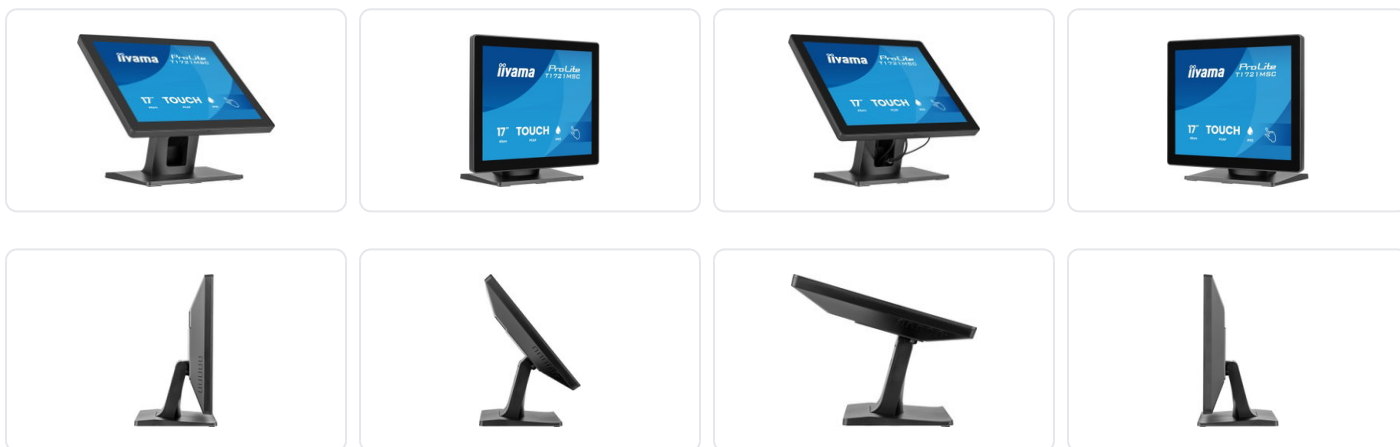



Aprašymas

The ProLite T1721MSC-B3 is a versatile 17" touchscreen monitor designed for smooth, accurate and reliable interaction. Its 10-point PCAP touch technology supports operation by finger, latex glove or compatible stylus, making it well suited to retail, hospitality, education and industrial environments. A protective glass overlay enhances durability and scratch resistance while preserving clear image quality and consistent touch performance. This makes the monitor a dependable choice for applications where the screen is used frequently throughout the day. The IPX3-rated front provides protection against water sprays from different directions at angles of up to 60°, offering added reassurance in environments where occasional exposure to moisture may occur. The stable stand features an 70° tilt range, allowing the screen to be positioned comfortably for different users and applications. Integrated 2 x 2W speakers deliver clear sound directly from the monitor, making the ProLite T1721MSC-B3 a practical and complete touchscreen solution for a wide range of professional settings.

Techninė specifikacija


Display	
Display diagonal	43.2 cm (17")
Display resolution	1280 x 1024 pixels
Native aspect ratio	5:4
Touchscreen	Yes
HD type	SXGA
Panel type	TN
Response time	5 ms
Screen shape	Flat
Contrast ratio (typical)	1000:1
Maximum refresh rate	75 Hz
Display number of colours	16.7 million colours
Touchscreen type	Tabletop
Touchscreen technology	Projected capacitive system
Number of simultaneous touchpoints	10
Display brightness (typical)	250 cd/m²
Display brightness	230 cd/m²
Viewing angle, horizontal	170°
Viewing angle, vertical	160°
Pixel pitch	0.264 x 0.264 mm
Horizontal scan range	31 - 80 kHz

Viewable size, horizontal	33.8 cm
Viewable size, vertical	27.1 cm
Display diagonal (metric)	43 cm
Surface hardness	7H
Performance	
NVIDIA G-SYNC	No
AMD FreeSync	No
Low Blue Light technology	Yes
Multimedia	
Built-in speaker(s)	Yes
Built-in camera	No
Number of speakers	2
RMS rated power	4 W
Design	
Market positioning	Business
Product colour	Black
Front bezel colour	Black
Glass thickness	1.5 mm
Ports & interfaces	
Built-in USB hub	No
HDMI	Yes
Headphone out	No
USB Touch port	Yes
VGA (D-Sub) ports quantity	1
HDMI ports quantity	1
Audio input	Yes
HDCP	Yes
Ergonomics	
VESA mounting	Yes
Cable lock slot	Yes
Height adjustment	No
Panel mounting interface	100 x 100 mm
Cable management	Yes
Cable lock slot type	Kensington

Tilt adjustment	Yes
Tilt angle range	-10 - 70°
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	Traditional Chinese, German, English, Spanish, French, Italian, Japanese
Number of OSD languages	7
Plug and Play	Yes
Power	
Energy efficiency class (SDR)	E
Energy efficiency class (HDR)	Not available
Power consumption (typical)	20 W
Power consumption (standby)	1.5 W
Power consumption (off)	0.3 W
AC adapter output voltage	12 V
Power supply type	External
Weight & dimensions	
Width (with stand)	392.5 mm
Depth (with stand)	198 mm
Height (with stand)	364 mm
Weight (with stand)	4.4 kg
Packaging data	
Package width	537 mm
Package depth	172 mm
Package height	500 mm
Package weight	5.8 kg
USB cable length	1.8 m
Packaging content	
Cables included	AC, USB, HDMI
Quick start guide	Yes
HDMI cable length	1.8 m
Power cable length	1.8 m
Sustainability	
Sustainability certificates	ErP
Other features	
International Protection (IP) code	IPX3

Compatible operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
AC adapter included	Yes
Brightness	230 cd/m²
Packaging content	AC adapter, mylar sheet (for VESA mount)
Active display area (W x H)	338 x 270.5 mm
USB ports quantity	1
Weight	4.4 kg
Height	364 mm
Width	392.5 mm
Depth	198 mm
Compliance certificates	CE, cULus, REACH, RoHS, VCCI, WEEE
Mean time between failures (MTBF)	50000 h
User controls	picture (backlight, brightness, contrast, sharpness) display (auto adjustment, H position, V position, pixel clock, phase) colour (colour temp, picture mode) input, audio (volume, mute, audio source), other (reset, OSD time, OSD H position, OSD V position, language) information
Touch method	stylus, finger, glove (latex)
Control panel	Menu, Up/Left/ Auto adjustment button, Down/Right button, Return/Exit button, Power
Technical details	
Native refresh rate	75 Hz
Matmenys ir svoris	
Matmenys (I × P × A)	53,00cm × 50,00cm × 17,00cm
Svoris	6,06kg

Energijos efektyvumas ir ekologinis projektavimas



2019/10/13

Energijos efektyvumo klasė

E A-G

- › [Energijos etiketė](#)
- › [Gaminio informacijos lapas](#)
- › [EPREL duomenų bazė](#)

Dokumentai ir vaizdo įrašai

- › [Gaminio lankstinukas](#)

Gamintojo ir saugos informacija

GAMINTOJAS

iiyama International

Wijkmeesterstraat 8, 2131 HA Hoofddorp, NL

iiyama.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius

info@shopro.lt