
APC Smart-UPS 2200VA nepertraukiamo maitinimo resursai (UPS) „Line-Interactive“ 2,2 kVA 1980 W 9 AC išvestis(ys / čių)

Gamintojas: **APC** · Modelis: **SMT2200IC** · EAN: **731304337317** · Prekės kodas: **643286**

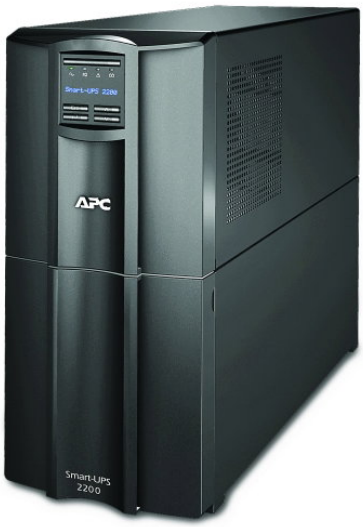

1 509,90 €

Kaina su PVM

Be PVM: **1 247,85 €**

Sandėlyje


Prekė internetu

Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ „Line-Interactive“
- ✓ 2,2 kVA 1980 W
- ✓ Signalų forma: Sinusas
- ✓ 9 AC išvestis(ys / čių)
- ✓ Rūgštinis akumuliatorius (VRLA)
- ✓ Juoda

















Aprašymas

Stay always online and prevent data loss

As soon as the power fails, an APC Smart-UPS immediately supplies emergency power to all connected equipment. Because an APC UPS does this automatically, you prevent unwanted failure of, for example, a PC, server or switch. With the free APC PowerChute software, you can even have critical IT hardware shut down automatically and in a controlled manner when the battery of the UPS is almost empty. This prevents data loss, downtime and physical damage to hardware.

Safety

In addition, a Smart-UPS protects connected devices against peak voltage caused by lightning, among other things. This APC emergency power supply is ideally suited for (small) business use.

Battery life

You can easily read the expected battery life in the runtime graph, which you can find between the product images. This makes it easy to see how long the UPS will supply emergency power at a certain load.

SmartConnect

Out-of-box remote UPS monitoring, free during a 6-month trial period. Using the SmartConnect Ethernet port, you can easily connect the Smart-UPS to your network and monitor it remotely via the secure APC SmartConnect cloud-based web portal*. In addition, the UPS can always be monitored via this port via EcoStruxure IT Expert (SFTWES1-DIGI).

* Extend access to SmartConnect via the following licenses:
1 year Standard Plan: ERWPMON1-1Y-DIGI
3 years Standard Plan: ERWPMON1-3Y-DIGI

1 year Advanced Plan: ERWPLUS1-1Y-DIGI
3 years Advanced Plan: ERWPLUS1-3Y-DIGI

PowerChute

By connecting the UPS to a maximum of one server via a USB cable, it can automatically provide it with a shutdown signal during a prolonged power failure and thus still prevent a hard shutdown. This exact moment can be set via the free APC PowerChute Serial Edition software.

Network Management Card

If you connect the UPS directly to your network via the optional APC Network Management Card (AP9640/AP9641), it can be easily managed remotely via SNMP or our remote management software Ecostruxure IT Expert (SFTWES1-DIGI). You can also automatically send a shutdown signal via the network to multiple physical and/or virtual servers. By means of the APC PowerChute Network Shutdown Software belonging to the network card, it is even possible to differentiate between the shutdown moment and the order in which this happens.

Ease of use

By means of physical buttons and an LCD screen, it is possible to set and read out the basic functionalities.

Extend the lifespan

The internal battery cartridge (RBC55) can be easily, safely and independently replaced by the user. This without having to switch off the APC SMT2200IC or connected equipment. This way you can easily and cheaply extend the life of the APC Smart-UPS and your equipment always stays online.

Warranty extension

The factory warranty of the SMT2200IC is 3 years, with the exception of the battery cartridge, which has a factory warranty of 2 years. Both are extended by 3 years to 6 and 5 years respectively with the APC service pack (WBEXTWAR3YR-SP-03).

Switched Outlet Groups: Remote reboot and phased start-up

Thanks to the Switched Outlet Groups it is possible to configure a phased/delayed power-on per UPS outlet group. This reduces the peak load on the UPS and brings it closer to the constant load, which can limit oversizing of the UPS.

It is also possible to reset a group of multiple UPS outlets and the equipment connected to them. If SmartConnect Advanced (ERWPLUS1-1Y-DIGI), a UPS with SmartConnect port + Ecostruxure IT Expert (SFTWES1-DIGI) or a network card (ap9640) in combination with Ecostruxure IT Expert (SFTWES1-DIGI) are used, this can even be done remotely.

Techninė specifikacija

Savybės	
UPS topologija	„Line-Interactive“
Išvesties galia (VA)	2,2 kVA
Išvesties galia	1980 W
Signalų forma	Sinusas
Įvesties eksploatacinė įtampa (min.)	151 V
Įvesties eksploatacinė įtampa (maks.)	302 V
Įėjimo dažnis	50/60 Hz
Išvesties darbinė įtampa (min.)	220 V
Išvesties darbinė įtampa (maks.)	240 V
Viršįtampio energijos įvertinimas	365 J
Reakcijos laikas	6 ms
Avarinis elektros išjungimas (EPO)	Taip
Išvesties įtampa THD	5%
Garso lygis	45 dB
Maitinimo apsaugos ypatybės	Apsauga nuo per didelės įtampos, Apsauga nuo perkrovos
Garsiniai perspėjimo signalai	Taip
Garsinio pavojaus signalo režimai	Signalas veikiant su akumuliatoriumi, Senkančio akumuliatoriaus signalas, Baterijos keitimas
Automatinis paleidimas iš naujo	Taip
Ryšys	
AC išėjimo tipai	C13 šakotuvas, C19 šakotuvas
Lizų kiekis	9 AC išvestis(ys / čių)
Išėjimo IEC jungčių skaičius	2
USB prievadas	Taip
USB 2.0 portų kiekis	1

USB prievado tipas	USB A tipo
Nuoseklioji sąsaja	Taip
Serijinių portų kiekis	1
Ethernet LAN (RJ-45) portų kiekis	1
„SmartSlot“	Taip
„SmartConnect“ prievadas	Taip

Baterija

Baterijos technologija	Rūgštinis akumuliatorius (VRLA)
Tipiško laikino maitinimo trukmė pilna apkrova	8,7 min
Tipiško laikino maitinimo trukmė pusei apkrovimo	25 min
Baterijos veikimo trukmė (maks.)	5 metai
Baterijos įkrovimo laikas	3 h

Konstrukcija

Produkto spalva	Juoda
Ekrano tipas	LCD
LED indikatoriai	Taip

Aplinkos sąlygos

Darbo temperatūros diapazonas (TT)	0 - 40 °C
Sandėliavimo temperatūros norma (T-T)	-15 - 45 °C
Darbo santykinės drėgmės diapazonas	0 - 95%
Sandėliavimo santykinis drėgmės diapazonas	0 - 95%
Darbinis aukštis	0 - 3000 m
Ne darbinis aukštis	0 - 15000 m

Sertifikatai

Atitikties sertifikatai	RoHS
Sertifikavimas	CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE

Pakuotės turinys

Pridėti kabeliai	RS-232, USB laidas
Pridedama valdymo kortelė	Ne

Tvarumas

Tvarumo sertifikatai	Green Premium

Svoris ir matmenys

Plotis	197 mm
Ilgis	544 mm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Aukštis	435 mm
Svoris	48,8 kg
Pakuotės duomenys	
Programinės įrangos CD	Taip
Pakuotės plotis	381 mm
Pakuotės gylis	762 mm
Pakuotės aukštis	699 mm
Paketo svoris	61,9 kg
Logistikos duomenys	
Gaminių skaičius ant padėklo	9 vnt
Darniosios sistemos (DS) kodas	85078000
Bendrasis anglies pėdsakas (kg of CO2e)	3715,93
Matmenys ir svoris	
Matmenys (I × P × A)	77,00cm × 69,00cm × 38,00cm

Dokumentai ir vaizdo įrašai

› Naudojimo instrukcija

Gamintojo ir saugos informacija

GAMINTOJAS

Schneider Electric SE
rue Joseph Monier 35, 92500 Rueil Malmaison, FR
se.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.