


StarTech.com 8P6G-PCIE-SATA-CARD sąsajos plokštė / adapteris

Vidinis Mini-SAS

Gamintojas: **STARTECH.COM** · Modelis: **8P6G-PCIE-SATA-CARD** · EAN: **065030893275** · Prekės kodas: **648180**

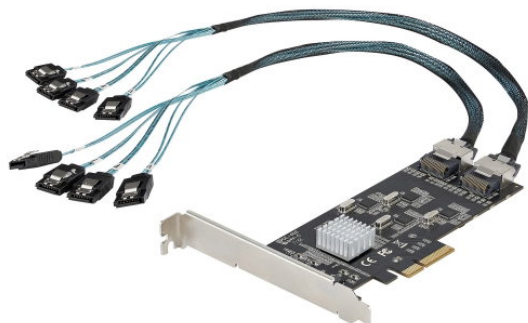

158,90 €

Kaina su PVM

Be PVM: **131,32 €**

Sandėlyje



Prekė internetu

Nuskuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Vidinis
- ✓ Priimančioji sąsaja: PCIe
- ✓ Išvesties sąsaja: Mini-SAS
- ✓ S.M.A.R.T. palaikymas TRIM palaikymas
- ✓ 6 Gbit/s
- ✓ Juoda



Aprašymas

SATA III (6Gbps) | PCI Express Gen 2 | PCIe x4 Slot | 2x Mini-SAS Connectors | 2x Mini-SAS to 4x-SATA Cables Included

This 8-port SATA III (6Gbps) controller enables you to add eight SATA 6Gbps hard drives (HDDs) or solid State Drives (SSDs) to your computer system or server via an available PCIe x4 card slot. The card supports SATA III and PCI-Express Gen 2 Specifications and four SATA controllers to deliver a high-performance data storage solution.

Quad Controllers to Deliver 8-Port SATA 6Gbps Performance

Featuring four 2-Port SATA 6Gbps controllers and a PCIe-x4 MUX, this SATA card enables the connection of eight high-performance SATA 6Gbps drives with a combined total throughput of up to 16Gbps. The SATA drives are connected via two Mini-SAS ports with two included Mini-SAS to 4x-SATA adapter cables. To ensure a secure connection, each SATA port on the included cables features a locking connector, that will prevent the drive from accidental disconnection when working inside your computer case.

Wide Compatibility

The PCIe MUX that's built into this controller card manages the downstream controllers, which improves motherboard compatibility by ensuring the card will work with motherboards that support bifurcation and motherboards that do not. To further improve motherboard compatibility the card does not have a built-in RAID controller, but fully supports the use of software RAID. Plus, with supports for PCIe Gen 2 and SATA III Specifications this card ensures backward compatibility with previous generations (SATA I/II, PCIe Gen 1) at lower performance.

The controller card is widely supported across all popular operating system platforms including Windows (XP and above), macOS (10.6.8 and above) and Linux (2.6.32 and above LTS kernels only).

Hassle-Free Installation

The SATA controller card features plug-and-play installation and can be installed in full-profile and low-profile computer systems with a full-profile bracket preinstalled, and an interchangeable low-profile (half-height) bracket included. The card also supports storage software data management systems such as Storage Spaces (Microsoft) , RAID Assistant (MacOS) and mdraid/mdadm (Linux), for hassle-free setup, partitioning and software RAID array building.

Techninė specifikacija

Ryšys	
Priimančioji sąsaja	PCIe
Išvesties sąsaja	Mini-SAS
Išplėtimo kortelės standartas	PCI 2.0
SATA peržiūra	3.0
Išoriniai „mini-SAS“ prievadai	2
Prievadų daugiklis	Taip
Konstrukcija	
Vidinis	Taip
Produkto spalva	Juoda
Savybės	
Lustų rinkinys	Pericom - PI7C9X2G608GP, ASMedia - ASM1061

Duomenų perdavimo sparta (maks.)	6 Gbit/s
S.M.A.R.T. palaikymas	Taip
TRIM palaikymas	Taip
Aplinkos sąlygos	
Darbo temperatūros diapazonas (TT)	5 - 50 °C
Sandėliavimo temperatūros norma (T-T)	-20 - 60 °C
Darbo santykinės drėgmės diapazonas	20 - 80%
Sistemos reikalavimai	
Palaikomos „Windows“ operacinės sistemos	Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 IoT Enterprise, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows Vista, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows Vista x64, Windows XP, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
Palaikomos MAC operacinės sistemos	Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks, Mac OS X 11.0 Big Sur, Mac OS X 13.0 Ventura
Palaikoma operacinė sistema „Linux“	Taip
Palaikomos serverio valdymo sistemos	Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Techninė informacija	
Atitikties sertifikatai	RoHS
Svoris ir matmenys	
Plotis	68,6 mm
Ilgis	150 mm
Aukštis	14,6 mm
Svoris	75 g
Pakuotės duomenys	
Pridėti kabeliai	SATA
Pridėti montavimo kronšteinai	Taip
Greito diegimo vadovas	Taip

Pakuotės plotis	157 mm
Pakuotės gylis	232 mm
Pakuotės aukštis	58 mm
Paketo svoris	81 g

Logistikos duomenys

Darniosios sistemos (DS) kodas	84733020
Gminių skaičius pagrindinėje (išorinėje) dėžėje	40 vnt
Pagrindinės (išorinės) dėžės plotis	610 mm
Pagrindinės (išorinės) dėžės ilgis	510 mm
Pagrindinės (išorinės) dėžės aukštis	380 mm

Dokumentai ir vaizdo įrašai

- › [Naudojimo instrukcija](#)
- › [Gaminio lankstinukas](#)

Gamintojo ir saugos informacija

GAMINTOJAS

StarTech.com Ltd.

Artisans Crescent 45, N5V 5E9 Ontario, London,
CA
startech.com

ATSAKINGAS ASMUO ES

StarTech.com Limited

Laarderhoogtweg 25, 1101 EB Amsterdam, NL
startech.com

PLATINTOJAS

MB KOMPIUTERIŲ GURU

V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt