


TP-Link Omada 5GHz 867Mbps Long-Range Indoor/Outdoor Wireless Bridge

Gamintojas: **TP-LINK** · Modelis: **EAP215-BRIDGE KIT** · EAN: **4895252502565** · Prekės kodas: **651522**

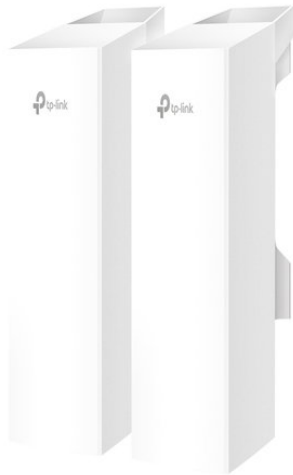

219,91 €

Kaina su PVM

Be PVM: **181,74 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 802.11ac for up to 867 Mbps on the 5 GHz wireless data rate
- ✓ Ideal for long-range wireless transmission up to 5 km
- ✓ Auto-pairing and agile LEDs for efficient deployment
- ✓ 3 × Gigabit Ethernet ports for more high-speed IP camera connections
- ✓ Supports Omada SDN for remote and centralized management
- ✓ IP65 weatherproof enclosure and 6kV lightning protection ensure all-weather suitability
- ✓ Supports Passive PoE for flexible deployment (adapter included)



Aprašymas

EAP215-Bridge KIT

Omada 5GHz 867Mbps Long-Range Indoor/Outdoor Wireless Bridge

- 802.11ac, up to 867 Mbps on 5 GHz
- Up to 3.1 mi (5 km) Long-Range Transmission
- Auto-Pairing and Multi-Bridge Auto-Pairing
- App-Guided Alignment and Speed Testing
- 3x Gigabit Ethernet Ports

- 802.3af PoE & DC Power Supply & Passive PoE
- IP65 Weatherproof and Operating Range of -40 °C to +70 °C.
- Remote Monitoring & Management

Techninė specifikacija

Specifications	
Sandėlio grupė	Server/Storage/Network > Access Points/Routers [+1151][-307]
Data transmission	
Maximum data transfer rate	867 Mbit/s
Maximum transfer distance	5000 m
Antenna	
Antenna design	Internal
Antenna type	2x2
Antenna gain level (max)	14 dBi
Wireless LAN features	
Wi-Fi	Yes
Wi-Fi band	Single-band (5 GHz)
Top Wi-Fi standard	Wi-Fi 5 (802.11ac)
WLAN data transfer rate (max)	867 Mbit/s
Frequency band	5 GHz
Network	
Ethernet LAN	Yes
Ethernet LAN interface type	Gigabit Ethernet
Ethernet LAN data rates	10,100,1000 Mbit/s
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11be, IEEE 802.11g, IEEE 802.11n
Cabling technology	10/100/1000Base-T(X)
Ports & interfaces	
Connectivity technology	Wired & Wireless
Ethernet LAN (RJ-45) ports	3
DC-in jack	Yes
Security	
Security algorithms	SNMP, SNMPv2, SNMPv3, SSH
MAC address filtering	Yes
Management features	

Web-based management	Yes
Features	
Product type	Network bridge
Mounting type	Pole
Product colour	White
LED indicators	Power
Reset button	Yes
International Protection (IP) code	IP65
Quality of Service (QoS) support	Yes
Power	
Power source type	DC, PoE
DC input voltage	12 V
Power over Ethernet (PoE)	Yes
Power over Ethernet (PoE) voltage	24 V
Operational conditions	
Operating temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	10 - 90%
Storage temperature (T-T)	-40 - 70 °C
Storage relative humidity (H-H)	5 - 90%
Certificates	
Certification	CE, FCC, RoHS
Weight & dimensions	
Width	224 mm
Depth	79 mm
Height	60 mm
Packaging content	
PoE+ Injector(s)	Yes
Cables included	AC