


TP-Link Omada AX1800 Ceiling Mount WiFi 6 Access Point, 5-pack

Gamintojas: **TP-LINK** · Modelis: **EAP613(5-PACK)** · EAN: **4895252500523** · Prekės kodas: **651533**

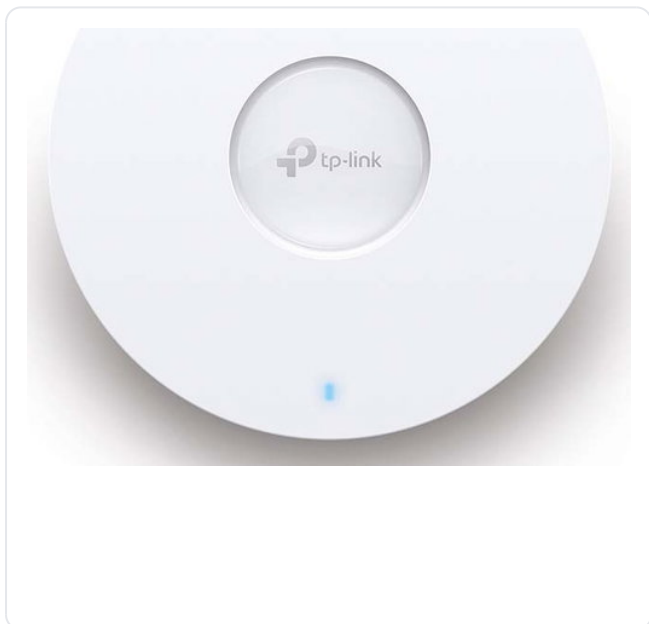

646,90 €

Kaina su PVM

Be PVM: **534,63 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Ultra-Fast WiFi 6 Speeds: Simultaneous 574 Mbps on 2.4 GHz and 1201 Mbps on 5 GHz totals 1775 Mbps Wi-Fi speeds.†
- ✓ High-Efficiency WiFi 6: More connected devices can enjoy faster speeds
- ✓ Centralized Cloud Management: Manage the whole network locally or from the cloud via web UI or Omada app
- ✓ Seamless Roaming: Even video streams and voice calls are unaffected as users move between locations.§
- ✓ Omada Mesh: Enables wireless connectivity between access points for extended range and flexible deployment.§
- ✓ PoE+ Powered: Supports DC (adapter is not included), 802.3at PoE+, and Passive PoE for flexible installations
- ✓ Ultra-Slim Design: Φ160 mm × 33.6 mm elegant design brings more agility
- ✓ Secure Guest Network: Along with multiple authentication options (SMS/Facebook Wi-Fi/ Voucher, etc.) and abundant wireless security technologies.§



Aprašymas

Easily Upgrade to Business WiFi 6 Network

AX1800 Ceiling Mount WiFi 6 Access Point

Upgrade to WiFi 6, Power up Your Business

WiFi 6 brings faster speeds, less lag, and higher capacity.

Seamless Integration into Omada SDN

The Omada Software Defined Networking (SDN) platform integrates network devices, including access points, switches, and routers. It provides 100% centralized cloud management and creates a highly scalable network controlled from a single interface.

Auto Channel Selection and Power Adjustment to Optimize Overall Performance

Provides powerful wireless performance while significantly reducing WiFi interference by automatically adjusting the channel settings and transmission power levels of neighboring APs in the same network.

Easy Deployment & Higher Performance by Omada Mesh Easy Pairing, Less Wiring

With Mesh technology, Omada EAPs save you from extra wires by wirelessly extending your WiFi signal further and more flexibly to hard-to-wire areas.

Optimized Network Performance

Intelligent self-organization optimizes the best path between EAPs while self-healing ensures you stay online even when one AP is disrupted.

Always Stay Smooth with Fast Roaming

Ensures customers to enjoy uninterrupted streaming when moving around by switching clients automatically to the access points with the optimal signal.

Ultra-Slim Design Brings More Agility

Exceptional performance with compact design ensures simple WiFi installation while saving space. The elegant appearance makes EAP613 perfectly blend into any modern office, hotel, classroom, or café.

Techninė specifikacija

Specifications	
Sandėlio grupė	Server/Storage/Network > Access Points/Routers [+1151][-307]
Features	
2.4 GHz	Yes
5 GHz	Yes
6 GHz	No
Maximum data transfer rate	1800 Mbit/s
Maximum data transfer rate (2.4 GHz)	574 Mbit/s
Maximum data transfer rate (5 GHz)	1201 Mbit/s
Frequency band	2.4 - 5 GHz
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Automatic channel selection	Yes
Automatic channel scanning	Yes
MIMO	Yes
MIMO type	Multi User MIMO
Spread spectrum method	OFDMA
Virtual LAN features	SSID-based VLAN assignment

Rate limiting	Yes
Adaptive bandwidth management	Yes
Band steering	Yes
Airtime Fairness (ATF)	Yes
Transmitting power (CE)	<20 dBm(2.4 GHz, EIRP); <23 dBm(5 GHz band1/2, EIRP); <25 dBm (5 GHz band3)
Transmitting power (FCC)	<25 dBm (2.4 GHz); <25 dBm (5 GHz)
Security	
Security algorithms	HTTPS, SNMP, SNMPv2, SNMPv3, WPA, WPA2, WPA3
Number of SSID supported	16
Management features	
Web-based management	Yes
Management platform	Omada
Ports & interfaces	
Ethernet LAN (RJ-45) ports	1
USB 2.0 ports quantity	0
DC-in jack	Yes
Power	
Power over Ethernet (PoE)	Yes
Design	
Placement	Ceiling, Wall
Product colour	White
Reset button	Yes
LED indicators	Yes
Antenna	
Antenna type	Internal
Antenna direction type	Omni-directional
Antennas quantity	4
Antenna gain level (max)	5 dBi
Performance	
Compatible operating systems	Microsoft Windows XP, Vista, Windows 7, Windows 8, Windows10, Windows11, Linux
Certificates	
Certification	CE, FCC, RoHS
Weight & dimensions	
Width	160 mm

Depth	160 mm
-------	--------

Height	33.6 mm
--------	---------

Packaging content

Quantity per pack	5 pc(s)
-------------------	---------

Mounting kit	Yes
--------------	-----

Quick start guide	Yes
-------------------	-----

Operational conditions

Operating relative humidity (H-H)	0 - 40%
-----------------------------------	---------

Operating temperature (T-T)	10 - 90 °C
-----------------------------	------------

Storage temperature (T-T)	-40 - 70 °C
---------------------------	-------------

Storage relative humidity (H-H)	5 - 90%
---------------------------------	---------