


InLine 51128K interface cards/adapter Internal

Gamintojas: **INLINE** · Modelis: **51128K** · EAN: **4043718343591** · Prekės kodas: **659565**

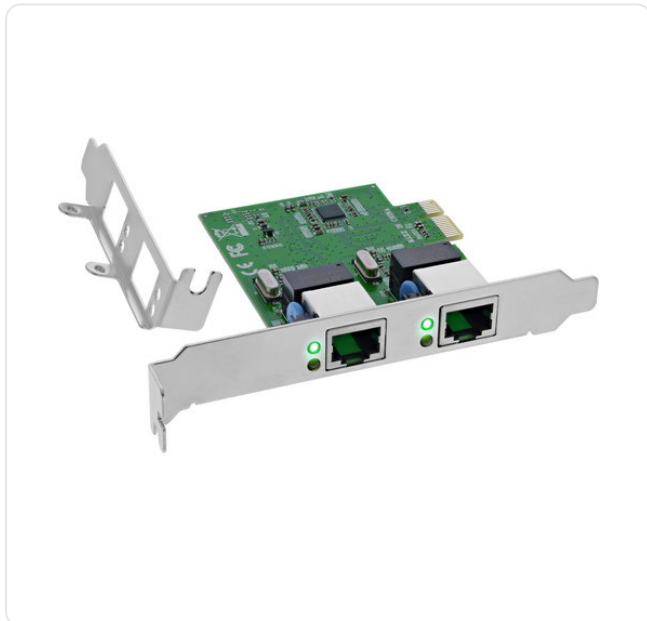

50,90 €

Kaina su PVM

Be PVM: **42,07 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Dual Gigabit Ethernet
- ✓ Two RJ45 ports with 10/100/1000 Mb/s each enable parallel connections for maximum flexibilityHigh system compatibility
- ✓ PCIe x1 interface and supplied low-profile slot bracket for standard and compact housingsOptimised network performance
- ✓ Support for jumbo frames (up to 9K), VLAN tagging (802.1Q) and flow control (802.3x)Energy-efficient data transmission
- ✓ Supports IEEE 802.3az-2010 (Energy Efficient Ethernet) for lower power consumptionReliable Realtek chipset
- ✓ Combination of RTL8111 and ASM1182e for stable performance in professional environments



Aprašymas

Dual Gigabit Ethernet:Two RJ45 ports with 10/100/1000 Mb/s each enable parallel connections for maximum flexibility

High system compatibility:PCIe x1 interface and supplied low-profile slot bracket for standard and compact housings

Optimised network performance:Support for jumbo frames (up to 9K), VLAN tagging (802.1Q) and flow control (802.3x)

Energy-efficient data transmission:Supports IEEE 802.3az-2010 (Energy Efficient Ethernet) for lower power consumption

Reliable Realtek chipset:Combination of RTL8111 and ASM1182e for stable performance in professional environments

The **InLine® Dual Gigabit network card** with two RJ45 ports is the ideal solution for professional **server, workstation and AV environments** where a stable, redundant or separate network connection is required. Thanks to the **PCIe x1 interface**and the supplied **low-profile slot bracket**, it can be flexibly integrated into a wide variety of housing types.

The card provides a reliable **10/100/1000 Mb/s Ethernet connection** via both ports and supports modern network technologies such as **IEEE 802.1Q VLAN, Jumbo Frames up to 9K** and **Flow Control according to 802.3x**. In addition, the **Energy Efficient Ethernet (EEE) function** (802.3az) improves energy consumption during operation – ideal for continuous use in the company.

The integrated **Realtek RTL8111 chipset** in combination with the ASM1182e controller ensures stable and high-performance data transmission – even in demanding network scenarios. All common operating systems are supported, including **Windows, Linux, FreeBSD** and virtualisation platforms such as VMware ESXi.

Techninė specifikacija

Specifications	
Sandėlio grupė	Server, Storage & Network > Network Adapters [+1948][-605]
Ports & interfaces	
Host interface	PCI Express
Design	
Internal	Yes
LED indicators	Yes
Country of origin	Taiwan
Features	
Chipset	Realtek RTL8111
Operational conditions	
Operating temperature (T-T)	0 - 55 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	0 - 90%
System requirements	
Windows operating systems supported	Windows 10, Windows 11, Windows 7, Windows 8
Linux operating systems supported	Kernel 2.6.31, Kernel 2.6.33, Kernel 3.12, Kernel 3.17, Kernel 3.3, Kernel 4.6.4, Linux Kernel 5.10, Linux Kernel 5.11, Linux Kernel 5.12, Linux Kernel 5.13, Linux Kernel 5.14, Linux Kernel 5.15, Linux Kernel 5.19, Linux Kernel 5.4, Linux Kernel 5.8, Linux Kernel 5.9, Linux Kernel 6.2, Linux Kernel 6.5
Server operating systems supported	Windows Server 2008 R2, Windows Server 2016, Windows Server 2019
Other operating systems supported	FreeBSD
Technical details	
Compliance certificates	TÜV mark
Weight & dimensions	
Width	92 mm
Depth	60 mm
Height	120 mm
Weight	2.2 kg

Packaging data	
Mounting brackets included	Yes
Manual	Yes
Package weight	50 g
Package volume	1100 cm³
Other features	
Connectivity technology	Wired
Ethernet LAN (RJ-45) ports	2
Networking standards	IEEE 802.1Q, IEEE 802.3, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x
Interface	Ethernet