


InLine PCI Multi I/O Controller Card 2 DB9 Serial Ports

Gamintojas: **INLINE** · Modelis: **66636A** · EAN: **4043718333233** · Prekės kodas: **659577**

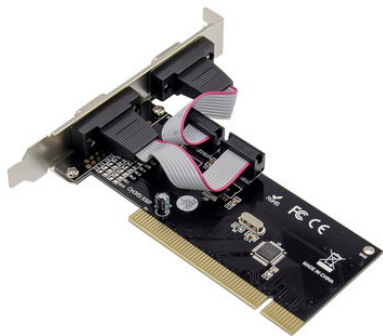

25,89 €

Kaina su PVM

Be PVM: **21,40 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Internal
- ✓ Host interface: PCI
- ✓ Output interface: Serial



Aprašymas

Reliable expansion for serial communication: Easily add two RS232 interfaces to your desktop system for industrial applications, legacy hardware and special projects.

Compatible with industry standards: Supports UART protocols (16C450/550/552) and ensures maximum flexibility when integrating into existing systems.

High transfer speed: The integrated CH351Q chipset enables stable data rates of up to 2 Mbps when both ports are used simultaneously.

Universal operating system support: Compatible with Microsoft Windows 98SE and above, as well as modern Linux kernels from 2.4.x for versatile use.

Easy installation in PCI systems: Thanks to the PCI V2.2 standard, you can install the card quickly and easily in almost any desktop system.

InLine® interface card, 2x 9-pin serial, PCI - Reliable expansion for your communication needs

The InLine® PCI interface card offers a simple and reliable way to expand your desktop systems with two additional RS232 serial interfaces. Based on the proven CH351Q chipset, the card supports high transfer rates of up to 2 Mbps and ensures stable data communication – ideal for industrial control systems, older printing systems, serial networks and specialised hardware projects.

Chipset: WCH CH351Q
Bus interface: PCI V2.2
UART compatibility: 16C450, 16C550, 16C552
FIFO: 16 bytes for sending and receiving per connection
Maximum transfer rate: up to 2 Mbps
Supported modes: SPP, PS/2, EPP, ECP (IEEE1284 compatible)
Supported serial formats: 5-6-7-8 bits
Stop bits: 1 or 2
Flow control: CTS/RTS hardware handshake
Operating systems: Microsoft Windows 98SE or newer, Server 2003 or newer, Linux Kernel 2.4.x or newer
Operating temperature: 0° C – 55° C
Storage temperature: -40° C – 70° C
Humidity: 10% - 90% non-condensing

Techninė specifikacija

Specifications	
Sandėlio grupė	Server, Storage & Network > Network Adapters [+1948][-605]
Ports & interfaces	
Host interface	PCI
Output interface	Serial
Host interface gender	Male
Expansion card standard	PCI 2.2
Serial ports quantity	2
Serial interface type	DB9
Design	
Internal	Yes
Country of origin	China
System requirements	
Windows operating systems supported	Windows 10, Windows 11, Windows 7, Windows 8, Windows 98SE, Windows Vista, Windows XP
Linux operating systems supported	Kernel 2.6, Kernel 2.6.31, Kernel 2.6.33, Kernel 3.12, Kernel 3.17, Kernel 3.3, Kernel 4.6.4, Linux Kernel 5.10, Linux Kernel 5.11, Linux Kernel 5.12, Linux Kernel 5.13, Linux Kernel 5.14, Linux Kernel 5.15, Linux Kernel 5.19, Linux Kernel 5.4, Linux Kernel 5.8, Linux Kernel 5.9, Linux Kernel 6.2
Server operating systems supported	Windows Server 2003, Windows Server 2007, Windows Server 2008, Windows Server 2012, Windows Server 2013, Windows Server 2016, Windows Server 2019, Windows Server 2022
Weight & dimensions	
Width	125 mm
Depth	1.35 mm

Height	125 mm
Weight	2 kg
Packaging data	
Package width	140 mm
Package depth	150 mm
Package height	30 mm
Package weight	54 g
Other features	
Dimensions (WxDxH)	125 x 1.35 x 125 mm