


InLine USB-A 3.2 Gen.1 7 Port Host Controller PCIe, SATA Power

Gamintojas: **INLINE** · Modelis: **76661L** · EAN: **4043718333677** · Prekės kodas: **659603**

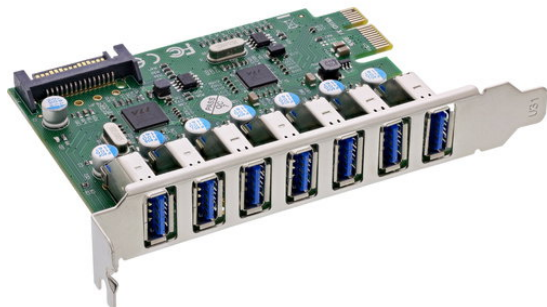

65,90 €

Kaina su PVM

Be PVM: **54,46 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Internal
- ✓ Host interface: PCIe
- ✓ Output interface: USB 3.2 Gen 1 (3.1 Gen 1)
- ✓ 5 Gbit/s



Aprašymas

Powerful USB expansion via PCIe: Seven USB-A 3.2 Gen.1 ports for modern peripherals with up to 5 Gb/s data transfer rates.

Stable power supply via SATA connection: Ideal for devices with higher power requirements such as docking stations, mass storage devices or charging functions.

Modern VL805+VL812 chipset combination: High compatibility and reliable data transfer under continuous load.

Backward compatible for maximum flexibility: Supports USB 2.0 and 1.1 – ideal for mixed device environments.

Broad system support: Compatible with Windows XP and Linux kernel 2.6.x or higher – for servers, workstations and industrial PCs.

The InLine® interface card 76661L offers a high-quality solution for expanding USB ports in professional system environments. It provides seven external USB-A 3.2 Gen.1 ports via PCI Express V2.0 – ideal for the parallel connection of input devices, storage media, docking stations or other USB peripherals.

Thanks to the integrated 15-pin SATA power connector, the card is able to reliably supply even devices with increased power requirements. The VIA chipset (VL805+VL812) ensures a stable connection with a maximum transfer rate of up to 5 Gb/s per port.

Full backward compatibility with USB 2.0 and 1.1 allows older USB devices to be integrated without any problems. This makes the card the ideal solution for mixed IT environments in companies, workshops or technical facilities.

Installation is simple via a free PCIe slot. Driver support is provided for all common operating systems from Windows XP and Linux kernel 2.6.x. This allows any workstation, server or industrial PC to be upgraded quickly and effectively.

Chipset: VIA VL805 + VL812

Interface: PCI Express 2.0

External connections: 7x USB-A 3.2 Gen.1

Internal connections: 1x SATA power connection (15-pin)

Data rates: 5 Gb/s, 480 Mb/s, 12 Mb/s, 1.5 Mb/s (downward compatible)

Compatible operating systems: Windows XP or newer, Server 2008 or newer, Linux from kernel 2.6.x

Operating temperature: 0° C – 55° C

Storage temperature: -40° C – 70° C

Humidity: 10% - 90% non-condensing

Techninė specifikacija

Specifications	
Sandėlio grupė	Server, Storage & Network > Network Adapters [+1948][-605]
Ports & interfaces	
Host interface	PCIe
Output interface	USB 3.2 Gen 1 (3.1 Gen 1)
Host interface gender	Male
Expansion card standard	PCIe 2.0
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	7
SATA power connector type	SATA 15-pin
Design	
Internal	Yes
Country of origin	China
Features	
Data transfer rate (max)	5 Gbit/s
System requirements	
Windows operating systems supported	Windows 10, Windows 11, Windows 7, Windows 8, Windows Vista, Windows XP
Linux operating systems supported	Kernel 2.6, Kernel 2.6.31, Kernel 2.6.33, Kernel 3.12, Kernel 3.17, Kernel 3.3, Kernel 4.6.4, Linux Kernel 5.10, Linux Kernel 5.11, Linux Kernel 5.12, Linux Kernel 5.13, Linux Kernel 5.14, Linux Kernel 5.15, Linux Kernel 5.19, Linux Kernel 5.4, Linux Kernel 5.8, Linux Kernel 5.9, Linux Kernel 6.2
Server operating systems supported	Windows Server 2008, Windows Server 2012, Windows Server 2013, Windows Server 2016, Windows Server 2019, Windows Server 2022
Weight & dimensions	
Width	125 mm
Depth	1.25 mm

Height	85 mm
--------	-------

Weight	2.5 kg
--------	--------

Packaging data

Package width	140 mm
---------------	--------

Package depth	150 mm
---------------	--------

Package height	30 mm
----------------	-------

Package weight	62 g
----------------	------

Other features

Dimensions (WxDxH)	125 x 1.25 x 85 mm
--------------------	--------------------