


InLine 92501M wire connector Terminal block / D-Sub 9 Green

Gamintojas: **INLINE** · Modelis: **92501M** · EAN: **4043718345977** · Prekės kodas: **659621**

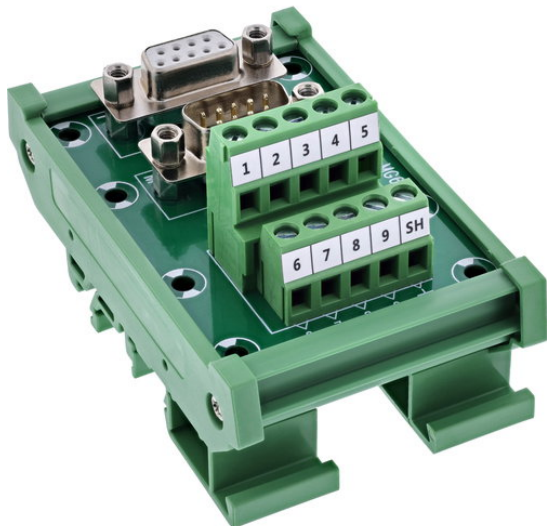

38,90 €

Kaina su PVM

Be PVM: **32,15 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Terminal block / D-Sub 9 Male/Female
- ✓ 1 pc(s)
- ✓ Green



Aprašymas

Time savings during installation: Quick wiring via screw terminals for 14-26 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Dual interface for flexible connection: Equipped with a D-Sub-9 female connector and a D-Sub-9 male connector – ideal for serial connections in both directions or as an interface switch.

Versatile industrial use: Suitable for structured installations in control cabinets, machine control, test setups, and mobile service applications.

DIN rail mounting for structured installations: The integrated DIN rail housing allows direct mounting on mounting rails – space-saving, robust, and suitable for workshop use.

High signal quality: An insulation resistance ≥ 10 M Ω at 300 V DC and a rated current of 0.8 A per pin ensure reliable signal transmission – even under continuous load.

The InLine® D-Sub 9 terminal block with combined female and male connector design enables flexible and structured wiring of serial interfaces within a single module. The dual D-Sub interface (male & female) makes the product ideal as a transfer or connection point between two devices. The side-accessible screw terminals with pressure plate support a connection range of 14-26 AWG and enable fast, secure wiring with a flat-blade screwdriver ≤ 2.5 mm. The pre-assembled DIN rail clip allows direct mounting on standard top-hat rails – ideal for professional control and test setups.

D-Sub 9 interfaces:1× female connector, 1× male connector, with mounting threads (UNC #4-40)
Connection technology:Screw terminal with pressure plate
Connection range:14–26 AWG
Actuation:With flat-blade screwdriver ≤ 2.5 mm
Rated current:0.8 A per pin
Max. operating voltage:100 V between two signals
Insulation resistance:≥ 10 MΩ @ 300 V DC
Operating temperature:–20 °C to +70 °C
Insulation layer:EVA insulation on underside
Mounting: Housing for direct mounting on DIN rail
Dimensions:approx. 70 × 53 × 51 mm (L x W x H)

Techninė specifikacija

Specifications	
Sandėlio grupė	Server, Storage & Network > Network Adapters [+1948][–605]
Features	
Connector(s)	Terminal block / D-Sub 9
Product colour	Green
Connector gender	Male/Female
Dielectric strength	300 V
Contact resistance	10 mΩ
Voltage	100 V
Current	0.8 A
Operational conditions	
Operating temperature (T-T)	–10 - 70 °C
Certificates	
Compliance certificates	RoHS, TÜV mark
Weight & dimensions	
Dimensions (WxDxH)	63 x 70 x 51 mm
Weight	89 g
Width	63 mm
Depth	70 mm
Height	51 mm
Packaging data	
Quantity per pack	1 pc(s)
Package width	95 mm
Package depth	125 mm

Package height	55 mm
----------------	-------

Package weight	133 g
----------------	-------

Package volume	100 cm ³
----------------	---------------------

Package type	Polybag
--------------	---------

Logistics data

Country of origin	Taiwan
-------------------	--------