


InLine 92502H wire connector Terminal block / D-Sub 25 Green

Gamintojas: **INLINE** · Modelis: **92502H** · EAN: **4043718346073** · Prekės kodas: **659628**

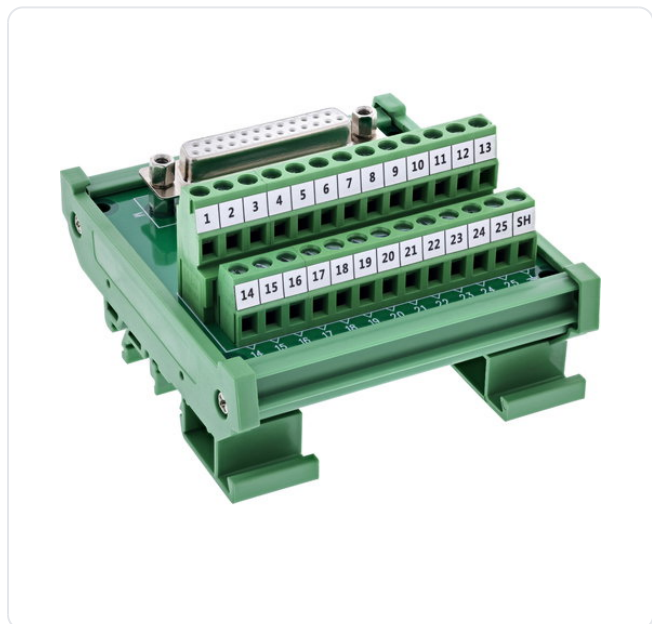

31,90 €

Kaina su PVM

Be PVM: **26,36 €**

Sandėlyje




Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Terminal block / D-Sub 25 Male/Female
- ✓ Green
- ✓ 1 pc(s)



Aprašymas

Time savings during installation: Quick wiring via screw terminals for 18-26 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The 2-row D-Sub-25 female connector is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fastening with matching plugs.

Versatile use in industry: Ideal for structured wiring in control cabinets, control and automation systems, or signal distribution.

DIN rail mounting for standard-compliant installation: The integrated DIN rail housing enables direct mounting on mounting rails – quickly, securely, and in a space-saving manner.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission – even under continuous load.

The InLine® D-Sub 25 terminal block with female connector in a 2-row design was specially developed for structured installations on DIN rails. The screw terminals with pressure plate enable tool-assisted connection of single wires in the 18-26 AWG range – quickly and securely with a flat-head screwdriver ≤ 2.5 mm.

The socket has an integrated screw lock (UNC #4-40) for secure connection with matching D-Sub plugs. The pre-assembled DIN rail housing facilitates installation in control cabinets and on mounting rails. The compact design and robust construction make the connection block the ideal

choice for industrial applications with high signal density.

D-Sub 25 female connector:2-row, with mounting thread for plug locking (UNC #4-40)

Connection technology:Screw terminal with pressure plate

Connection range:18–26 AWG

Actuation:With flat-blade screwdriver ≤ 2.5 mm

Rated current:0.7 A per pin

Max. operating voltage:100 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature:-20 °C to +105 °C

Insulation layer:EVA insulation on underside

Mounting:Housing for direct mounting on DIN rail

Dimensions:approx. 87 × 79 × 51 mm (H × W × D)

Techninė specifikacija

Specifications	
Sandėlio grupė	Server, Storage & Network > Network Adapters [+1948][-605]
Features	
Connector(s)	Terminal block / D-Sub 25
Product colour	Green
Connector gender	Male/Female
AWG wire size	26/18
Dielectric strength	300 V
Contact resistance	10 m Ω
Voltage	100 V
Current	0.7 A
Operational conditions	
Operating temperature (T-T)	-20 - 105 °C
Certificates	
Compliance certificates	RoHS, TÜV mark
Weight & dimensions	
Dimensions (WxDxH)	79 x 87 x 51 mm
Weight	133 g
Width	79 mm
Depth	87 mm
Height	51 mm
Packaging data	
Quantity per pack	1 pc(s)

Package width	95 mm
Package depth	125 mm
Package height	55 mm
Package weight	180 g
Package volume	100 cm ³
Package type	Polybag
Logistics data	
Country of origin	Taiwan