


InLine 92503A wire connector Terminal block, VGA (HD15) Blue, Green

Gamintojas: **INLINE** · Modelis: **92503A** · EAN: **4043718346028** · Prekės kodas: **659631**

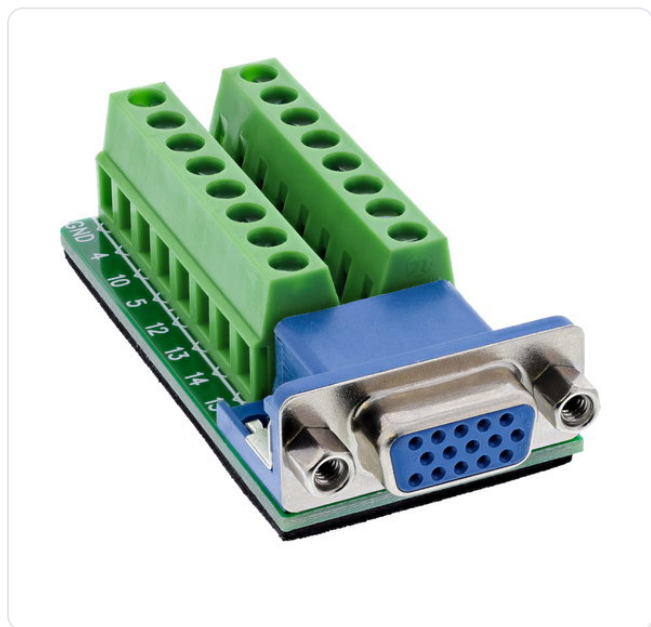

18,90 €

Kaina su PVM

Be PVM: **15,62 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Female Straight/Angled
- ✓ Blue, Green
- ✓ 1 pc(s)



Aprašymas

Time savings during installation: Quick wiring via screw terminals for 18-26 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The VGA socket (HD15) is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fixation with matching connectors – vibration-proof and durable.

Versatile industrial applications: Ideal for signal transmission in visualization, test setups, laboratory applications, control systems, and prototyping.

Compact design: With a width of only 63.8 mm, the terminal block can be integrated into existing systems in a space-saving manner – even where space is limited.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission – even under continuous load and in industrial environments.

The InLine® VGA (HD15) terminal block with socket in a 2-row design offers a practical solution for open wiring of analog image or control signals – e.g., in test benches, laboratory applications, or prototyping. The screw terminals with pressure plate allow the connection of single wires in the

range of 18–26 AWG without soldering or special tools. Actuation is tool-assisted with a flat-blade screwdriver ≤ 2.5 mm. The VGA socket is equipped with an integrated mounting thread (UNC #4-40), which ensures a secure mechanical connection to matching connectors – even in the event of vibration or frequent movement. The compact design with a length of only 63.8 mm allows for space-saving integration, e.g., in housings or test setups. An EVA insulating layer provides additional protection when mounting on conductive surfaces.

- VGA interface:**HD15, female connector, 2 rows
- Connection technology:**Screw terminal with pressure plate
- Connection range:**18–26 AWG
- Actuation:**With flat-blade screwdriver ≤ 2.5 mm
- Rated current:** 0.7 A per pin
- Max. operating voltage:** 100 V between two signals
- Insulation resistance:** $\geq 10\text{ M}\Omega$ @ 300 V DC
- Operating temperature:**-20 °C to +105 °C
- Insulation layer:**EVA insulation on underside
- Dimensions:**approx. 64 × 31 × 18 mm (L × W × H)

Techninė specifikacija

Specifications	
Sandėlio grupė	Server, Storage & Network > Network Adapters [+1948][-605]
Features	
Connector(s)	Terminal block, VGA (HD15)
Product colour	Blue, Green
Connector gender	Female
Connector form factor	Straight/Angled
AWG wire size	26/18
Dielectric strength	300 V
Contact resistance	10 mΩ
Voltage	100 V
Current	0.7 A
Operational conditions	
Operating temperature (T-T)	-20 - 105 °C
Certificates	
Compliance certificates	TÜV mark, RoHS
Weight & dimensions	
Dimensions (WxDxH)	31 x 64 x 18 mm
Weight	34 g
Width	31 mm
Depth	64 mm
Height	18 mm

Packaging data	
Quantity per pack	1 pc(s)
Package width	100 mm
Package depth	165 mm
Package height	16 mm
Package weight	37 g
Package volume	100 cm³
Package type	Polybag
Logistics data	
Country of origin	Taiwan