


InLine 92505D wire connector 2x RJ45 8P8C / 2x Terminal block 9 terminals Green

Gamintojas: **INLINE** · Modelis: **92505D** · EAN: **4043718346288** · Prekės kodas: **659648**

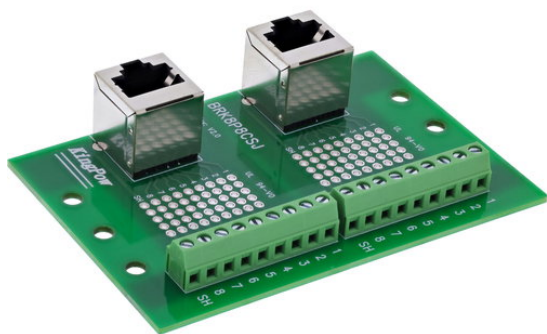

34,90 €

Kaina su PVM

Be PVM: **28,84 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Female/Female Straight/Angled
- ✓ Green
- ✓ 1 pc(s)



Aprašymas

Time savings during installation:Two screw terminal blocks for 8 wires plus shield each enable fast, solder-free wiring – tool-assisted with a flat-head screwdriver ≤ 2.5 mm, suitable for 16–26 AWG.

Dual RJ45 interface with separate signal routing:Two standardized RJ45 sockets (8P8C) are aligned upwards – ideal for structured network wiring where space is limited in depth.

Standard-compliant DIN rail mounting:The housing is prepared for DIN mounting rails and allows space-saving and secure integration into control cabinets.

Suitable for parallel Ethernet lines:Perfect for industrial test setups, redundancy lines, or structured signal distribution in control and test environments.

High signal quality:An insulation resistance of ≥ 10 MΩ at 300 V DC and a rated current of 1.0 A per pin ensure reliable and secure data transmission – even under continuous load in industrial environments.

The InLine® RJ45 terminal block with two vertically aligned sockets (8P8C) enables structured, space-saving Ethernet wiring in industrial

environments. Each RJ45 socket is fully connected via a separate 9-pin screw terminal strip (8 signals + shield) – ideal for parallel network signals, redundancy paths, or test connections.

The screw terminals are accessible from the side, numbered, and support wires in the range of 16–26 AWG. Wiring is quick and tool-assisted using a flat-blade screwdriver ≤ 2.5 mm.

Thanks to the pre-mounted DIN rail clip, the module is immediately ready for standard-compliant integration in the control cabinet or distribution box. The robust design and tested short-circuit and miswiring protection ensure reliable use in continuous industrial operation.

RJ45 interface: 2× 8P8C socket (facing upwards)

Screw terminal strip: 2x 9 terminals (8 signals + shield), grid dimension 5.0 mm, with pressure plate

Connection range: 16–26 AWG

Actuation: With flat-blade screwdriver ≤ 2.5 mm

Rated current: 1.0 A per pin

Max. operating voltage: 100 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature: -20 °C to +70 °C

Insulation layer: EVA insulation on underside

Mounting: Prepared for DIN top-hat rail

Dimensions: approx. 60 × 90 × 17 mm (W × H × D)

Techninė specifikacija

Specifications	
Sandėlio grupė	Server, Storage & Network > Network Adapters [+1948][-605]
Features	
Connector(s)	2x RJ45 8P8C / 2x Terminal block 9 terminals
Product colour	Green
Connector gender	Female/Female
Connector form factor	Straight/Angled
AWG wire size	26/16
Dielectric strength	300 V
Contact resistance	10 m Ω
Current	1 A
Operational conditions	
Operating temperature (T-T)	-20 - 70 °C
Certificates	
Compliance certificates	RoHS, TÜV mark
Weight & dimensions	
Dimensions (WxDxH)	60 x 90 x 17 mm
Weight	38 g
Width	60 mm
Depth	90 mm

Height	17 mm
--------	-------

Packaging data

Quantity per pack	1 pc(s)
-------------------	---------

Package volume	100 cm ³
----------------	---------------------

Logistics data

Country of origin	Taiwan
-------------------	--------