


TP-Link EAP720 wireless access point 4324 Mbit/s White Power over Ethernet (PoE)

Gamintojas: **TP-LINK** · Modelis: **EAP720** · EAN: **1210002608732** · Prekės kodas: **663021**

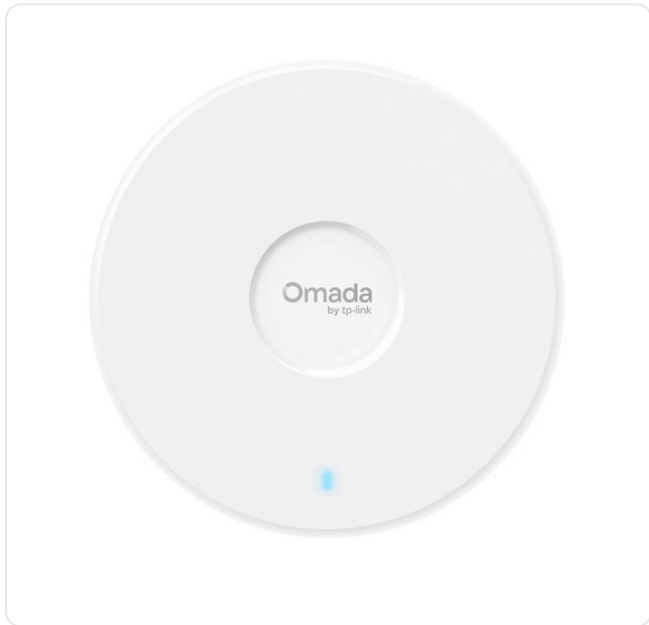

177,89 €

Kaina su PVM

Be PVM: **147,02 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Dual-Band 4-Stream Wi-Fi 7: Up to 5.0 Gbps (4324 Mbps on 5 GHz + 688 Mbps on 2.4 GHz).†
- ✓ 1× 2.5G Port: Ensures fast connectivity throughout the network.
- ✓ Low Latency and Interference: Multi-Link Operation, Multi-Rus, and 4K-QAM ensure high performance of your network.‡
- ✓ Flexible Deployment and Easy Setup: Supports both 802.3at PoE and DC Power supply for flexible installation (power adapter included). Omada SDN for one-click setup.
- ✓ Advanced Features: Supports centralized management, Mesh, and Seamless Roaming.Δ
- ✓ More Connections and Wider Coverage: Supports 250+ concurrent clients* and covers up to 1500 ft² (140 m²) **for reliable and extensive wireless connectivity.



Aprašymas

Optimized Wired Performance with 2.5G PoE+ Port

With a 2.5 Gigabit Ethernet Port, EAP720 delivers remarkable multi-gigabit performance for higher bandwidth and faster WiFi. Compatibility with 802.3at PoE is ideal for flexible deployment.

Techninė specifikacija

Specifications	
Sandėlio grupė	Server/Storage/Network > Access Points/Routers [+1151][-307]
Features	
2.4 GHz	Yes
5 GHz	Yes
6 GHz	No
Maximum data transfer rate	4324 Mbit/s
Maximum data transfer rate (2.4 GHz)	688 Mbit/s
Maximum data transfer rate (5 GHz)	4324 Mbit/s
Ethernet LAN data rates	2500 Mbit/s
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11be, IEEE 802.11e, IEEE 802.11g, IEEE 802.11i, IEEE 802.11k, IEEE 802.11n, IEEE 802.11r, IEEE 802.11v, IEEE 802.1Q, IEEE 802.1x, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3bz, IEEE 802.3x
Coverage area	140 m²
Channel bandwidth	240 MHz
Spread spectrum method	OFDMA
Wi-Fi Multimedia (WMM)/(WME)	Yes
VLAN support	Yes
Rate limiting	Yes
Airtime Fairness (ATF)	Yes
Quality of Service (QoS) support	Yes
BeamForming	Yes
Maximum Tx power (2.4 GHz)	25 dBmW
Maximum Tx power (5 GHz)	25 dBmW
Security	
Security algorithms	EAP-AKA, EAP-FAST, EAP-GTC, EAP-MD5, EAP-PEAP, EAP-SIM, EAP-TLS, EAP-TTLS, PEAP, PPSK, SNMP, SNMPv2, SNMPv3, SSH, SSID, WPA-Enterprise, WPA-Personal, WPA2-Enterprise, WPA2-Personal, WPA3-Enterprise, WPA3-Personal
MAC address filtering	Yes
Guest access	Yes
Schedule access	Yes
Remote Authentication Dial-In User Service (RADIUS)	Yes
Access Control List (ACL)	Yes
Protocols	

DHCP client	Yes
Supported network protocols	IPv4/IPv6
Management features	
Web-based management	Yes
Syslog	Yes
Access point management	Wi-Fi schedule
Cloud-managed	Yes
Firmware upgradeable	Yes
Ports & interfaces	
Ethernet LAN (RJ-45) ports	1
DC-in jack	Yes
Power	
Power over Ethernet (PoE)	Yes
Power over Ethernet (PoE) type supported	PoE+
DC voltage range	12 V
Input current	1.5 A
Power consumption (max)	17.83 W
Design	
Placement	Ceiling, Wall
Product colour	White
Reset button	Yes
LED indicators	Yes
Antenna	
Antenna type	Internal
Performance	
Flash memory	128 MB
Internal memory	4096 MB
Certificates	
Compliance certificates	CE, Federal Communications Commission (FCC), Industry Canada (IC), RoHS
Weight & dimensions	
Width	160 mm
Depth	160 mm
Height	36.7 mm
Weight	410 g

Packaging data

Package width	245 mm
Package depth	228 mm
Package height	65 mm
Package weight	792 g

Packaging content

AC adapter included	Yes
Mounting kit	Yes
Quick start guide	Yes

Operational conditions

Operating relative humidity (H-H)	10 - 90%
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 70 °C
Storage relative humidity (H-H)	5 - 90%

Matmenys ir svoris

Matmenys (I × P × A)	25,00cm × 7,00cm × 23,00cm
Svoris	0,89kg