


Asrock ROMED8-2T motherboard LGA 4094 ATX

Gamintojas: **ASROCK** · Modelis: **ROMED8-2T** · EAN: **4710483931130** · Prekės kodas: **665790**

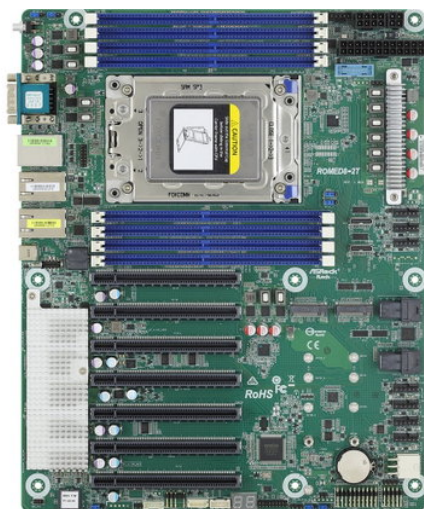

771,90 €

Kaina su PVM

Be PVM: **637,93 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt



Aprašymas

Compatible operating systems: Microsoft® Windows® - Server 2016 (64 bit) - Server 2019 (64 bit) Linux - RedHat Enterprise Linux Server 8.0 (64 bit) / 7.6 (64 bit) - CentOS 8.0 (64 bit) / 7.6 (64 bit) - SUSE SLES 15.1 (64 bit) / 12.4 (64 bit) - Ubuntu 18.04.3 (64 bit) / 16.04.6 (64 bit) - CITRIX Hypervisor 8.1 Virtual - VMware® ESXi 6.5 u3 / 6.7 u3 - vSphere 6.5 u3 / 6.7 u3 | Supported storage drive interfaces: M.2, SATA III | Graphics card: AST2500 | Supported memory module capacities: 8GB | Supported memory module capacities: 64GB | Supported memory module capacities: 32GB | Supported memory module capacities: 256MB | Supported memory module capacities: 16GB | Supported memory module capacities: 128MB | Supported memory clock speeds: 3200 | Supported memory clock speeds: 2666 | Maximum internal memory: 2 TB | Supported memory clock speeds: 2400 | USB 3.2 Gen 1 (3.1 Gen 1) connectors: 1 | Wake-on-LAN ready: Yes | Supported storage drive types: HDD & SSD | Supported memory clock speeds: 2933 | Motherboard form factor: ATX | LAN controller: Realtek RTL8211E | Warnings: The motherboard may contain electronic components hazardous to health - avoid direct contact. | Compliance certificates: RoHS | Warnings: Do not open or disassemble the motherboard. | Warnings: Use only in a dry and well-ventilated area. | Memory channels: Octa-channel | USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity: 2 | USB 3.2 Gen 2 (3.1 Gen 2) Type-C ports quantity: 1 | Width: 305 mm | USB 3.2 Gen 2 (3.1 Gen 2) connectors: 1 | Height: 70 mm | ACPI version: 2.0 | Operating temperature (T-T): 10 - 35 °C | PCI Express x16 (Gen 4.x) slots: 7 | COM ports quantity: 1 | Ethernet LAN (RJ-45) ports: 3 | Compatible processor series: AMD EPYC | Number of chassis fan connectors: 7 | BIOS memory size: 256 Mbit | System Management BIOS (SMBIOS) version: 2.8 | CPU fan connector: Yes | Processor manufacturer: AMD | TPM connector: Yes | Depth: 244 mm | Number of M.2 (M) slots: 2 | Wi-Fi: No | Ethernet LAN: Yes | Number of SATA III connectors: 8 | Power fan connector: Yes | Harmonized System (HS) code: 84733020 | ATX Power connector (24-pin): Yes | Storage temperature (T-T): -40 - 70 °C | BIOS type: AMI | Memory voltage: 1.2 V | Processor socket: LGA 4094 | Ethernet interface type: 10 Gigabit Ethernet | VGA (D-Sub) ports quantity: 1 | Number of memory slots: 8 | Weight: 1.69 kg | Memory slots type: DIMM | Supported memory types: DDR4-SDRAM | Maximum number of SMP processors: 1

Techninė specifikacija

Specifications	
Sandėlio grupė	AMD server motherboards [+6][-33]
Matmenys ir svoris	
Matmenys (l × p × A)	35,00cm × 30,00cm × 7,00cm
Svoris	1,65kg