


ASUS P13R-M Intel C262 LGA 1700 micro ATX

Gamintojas: **ASUS** · Modelis: **90SB0C70-M0UAY0** · EAN: **4711636234337** · Prekės kodas: **665798**

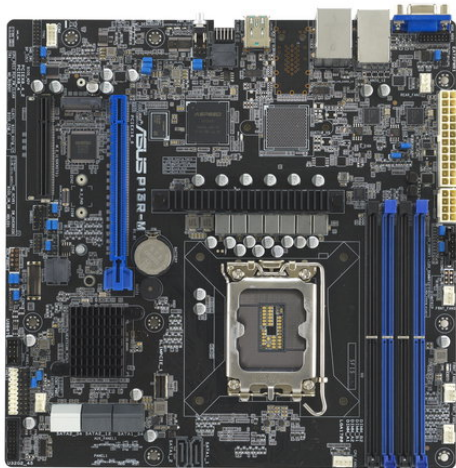

451,90 €

Kaina su PVM

Be PVM: **373,47 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Powered by eight-core Intel Xeon E-2400 series and Intel Xeon 6300 series processor with support for up to 95 W TDP
- ✓ Flexible expandability with eight native SATA HDDs, one PCIe 5.0 slot and one PCIe 4.0 slot
- ✓ Dual Intel I210-AT gigabit Ethernet with teaming support
- ✓ One M.2 for up to 32 Gbps performance for faster OS booting
- ✓ Onboard ASUS ASMB11-iKVM with ASPEED AST2600 controller for out-of-band management
- ✓ Integrated PFR FPGA as the platform Root-of-Trust solution for firmware resiliency



Aprašymas

PCIe 5.0 Ready

Faster storage, graphics and networking capabilities PCI Express® (PCIe®) 5.0 delivers 32GT/s bandwidth, which is twice the speed of PCIe 4.0, and offers lower power consumption, better land scalability and backwards compatibility. ASUS servers are PCIe 5.0 ready with scalability design to satisfy the increasing workloads for modern data center.

Techninė specifikacija

Specifications

Sandėlio grupė	INTEL server motherboards [+10][-47]
Processor	
Processor manufacturer	Intel
Processor socket	LGA 1700
Compatible processor series	Intel® Pentium®, Intel Xeon E
Memory	
Supported memory types	DDR5-SDRAM
Number of memory slots	4
Maximum internal memory	128 GB
Memory slots type	DIMM
Memory channels	Dual-channel
Supported memory clock speeds	3600,4000,4400 MHz
Supported memory module capacities	8GB, 16GB, 32GB
Storage controllers	
Supported storage drive interfaces	M.2, SATA III
Supported storage drive types	HDD & SSD
Number of HDDs supported	8
Graphics	
Graphics card family	ASPEED
Graphics card	AST2600
Internal I/O	
USB 2.0 connectors	1
USB 3.2 Gen 1 (3.1 Gen 1) connectors	1
USB 3.2 Gen 2 (3.1 Gen 2) connectors	3
Number of SATA III connectors	8
ATX Power connector (24-pin)	Yes
EPS power connector (8-pin)	Yes
TPM connector	Yes
Serial port headers	1
Rear panel I/O ports	
USB 2.0 ports quantity	0
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	0
USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity	0
USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity	3

USB 3.2 Gen 2 (3.1 Gen 2) Type-C ports quantity	0
Ethernet LAN (RJ-45) ports	2
VGA (D-Sub) ports quantity	1
HDMI ports quantity	0
DVI-D ports quantity	0
Network	
Ethernet LAN	Yes
Ethernet interface type	Fast Ethernet, Gigabit Ethernet
LAN controller	Intel® I210-AT
Features	
Component for	Server
Motherboard form factor	micro ATX
Motherboard chipset family	Intel
Motherboard chipset	Intel C262
Expansion slots	
PCI Express x8 (Gen 4.x) slots	1
PCI Express x16 (Gen 5.x) slots	1
Number of M.2 (M) slots	1
1st M.2 largest key size	2280
Operational conditions	
Storage temperature (T-T)	-40 - 70 °C
Operating temperature (T-T)	10 - 50 °C
Storage relative humidity (H-H)	20 - 90%
Packaging data	
Package width	341 mm
Package depth	281 mm
Package height	78 mm
Package weight	1.3 kg
Weight & dimensions	
Width	244 mm
Depth	244 mm
Packaging content	
Cables included	SATA
Other features	

Weight	760 g
--------	-------

Matmenys ir svoris

Matmenys (l × P × A)	34,00cm × 8,00cm × 28,00cm
----------------------	----------------------------

Svoris	1,38kg
--------	--------