


Supermicro X13SCL-F-B Bulk Intel C262 LGA 1700 micro ATX

Gamintojas: **SUPERMICRO** · Modelis: **MBD-X13SCL-F-B** · EAN: **672042899166** · Prekės kodas: **665802**

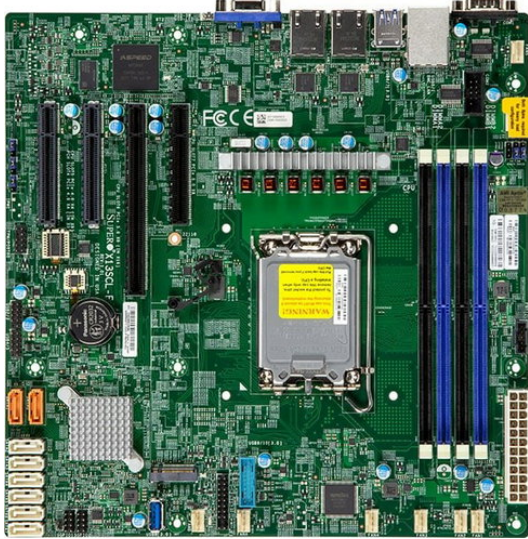

441,90 €

Kaina su PVM

Be PVM: **365,21 €**

Sandėlyje



Prekė internetu

Nuskenaukite kodą arba apsilankykite www.shopro.lt

Aprašymas

RAID levels: 5 | Unbuffered memory: Yes | Memory voltage: 1.1 V | Motherboard form factor: micro ATX | Motherboard chipset: Intel C262 | COM ports quantity: 1 | Number of COM connectors: 1 | Number of SATA III connectors: 8 | BIOS type: UEFI AMI | TPM connector: Yes | Compatible processor series: Intel® Xeon® | RAID support: Yes | Operating temperature (T-T): -5 - 55 °C | VGA (D-Sub) ports quantity: 1 | Number of memory slots: 4 | Supported memory types: DDR5-SDRAM | Storage relative humidity (H-H): 8 - 90% | Supported memory module capacities: 32GB | Number of M.2 (M) slots: 1 | Motherboard chipset family: Intel | Ethernet LAN (RJ-45) ports: 2 | Memory slots type: DIMM | Maximum internal memory: 128 GB | USB 3.2 Gen 1 (3.1 Gen 1) connectors: 2 | Component for: Server | ACPI version: 6.4 | USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity: 3 | Supported memory clock speeds: 3600 | ECC compatibility: ECC | Processor manufacturer: Intel | RAID levels: 1 | Wi-Fi: No | Supported memory module capacities: 8GB | Supported memory clock speed (max): 4400 MHz | Supported memory clock speeds: 4000 | Operating relative humidity (H-H): 8 - 80% | Ethernet interface type: Gigabit Ethernet | Supported memory clock speeds: 4400 | Supported storage drive interfaces: SATA III | USB 2.0 connectors: 4 | Processor socket: LGA 1700 | PCI Express x4 (Gen 4.x) slots: 2 | USB 2.0 ports quantity: 2 | Compatible processor series: Intel Pentium G | RAID levels: 0 | Storage temperature (T-T): -30 - 60 °C | Supported memory module capacities: 16GB | PCI Express x8 (Gen 5.x) slots: 2 | Ethernet LAN: Yes | RAID levels: 10 | System Management BIOS (SMBIOS) version: 3.5 | BIOS memory size: 32 Mbit | Warnings: Adjust adequate ventilation to avoid overheating and potential damage.

Techninė specifikacija

Matmenys ir svoris

Matmenys (l × p × a)	2,00cm × 26,00cm × 26,00cm
Svoris	0,60kg