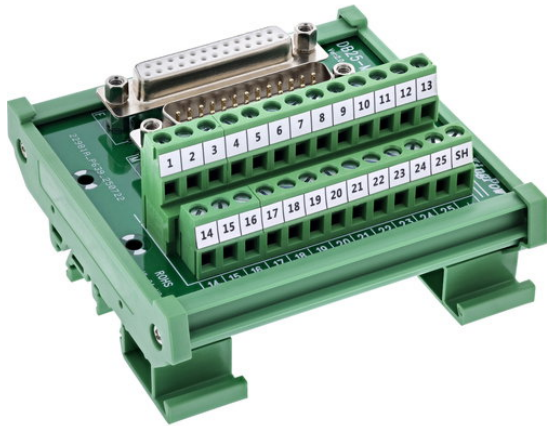


InLine 92502G wire connector Terminal block / D-Sub 25 Green

 Gamintojas: **INLINE** · Modelis: **92502G** · EAN: **4043718346066** · Prekės kodas: **674121**


34,90 €

Kaina su PVM

 Be PVM: **28,84 €**

Sandėlyje


Prekė internetu

 Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Terminal block / D-Sub 25 Female/Female
- ✓ 1 pc(s)
- ✓ Green



Aprašymas

Time savings during installation: Quick wiring via screw terminals for 18-26 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Dual interface for flexible connection: Equipped with a D-Sub-25 plug and a D-Sub-25 socket – ideal as a compact feed-through or branch point for serial signals.

Versatile industrial use: Suitable for structured wiring in control cabinets, machine control, signal distribution, or test setups.

DIN rail mounting for standard-compliant installation: The integrated DIN rail clip enables direct mounting on mounting rails – quick, workshop-ready, and space-saving.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission – even under continuous load.

The InLine® D-Sub 25 terminal block with combined socket and plug design is designed for structured signal wiring in industrial applications. It combines two serial D-Sub interfaces (male & female) in a compact module. The side-accessible screw terminals with pressure plate allow the connection of wires in the range of 18-26 AWG – tool-assisted with a flat-head screwdriver ≤ 2.5 mm.

The robust plastic housing with pre-mounted DIN rail clip is suitable for quick mounting on top-hat rails. An EVA insulating layer provides protection when mounting on conductive surfaces. Ideal for control technology, prototyping, test stations, or handover solutions.

D-Sub 25 interfaces:1× female connector, 1× male connector, with mounting threads (UNC #4-40)
Connection technology:Screw terminal with pressure plate
Connection range:18-26 AWG
Actuation:With flat-blade screwdriver ≤ 2.5 mm
Rated current: 0.7 A per pin
Max. operating voltage: 100 V between two signals
Insulation resistance:≥ 10 MΩ @ 300 V DC
Operating temperature:-20 °C to +105 °C
Insulation layer:EVA insulation on underside
Mounting:Housing for direct mounting on DIN rail
Dimensions:approx. 88 × 87 × 51 mm (W × H × D)

Techninė specifikacija

Specifications	
Sandėlio grupė	Server, Storage & Network > Network Adapters [+1948][-605]
Features	
Connector(s)	Terminal block / D-Sub 25
Product colour	Green
Connector gender	Female/Female
AWG wire size	26/18
Dielectric strength	300 V
Contact resistance	10 mΩ
Voltage	100 V
Current	0.7 A
Operational conditions	
Operating temperature (T-T)	-20 - 105 °C
Certificates	
Compliance certificates	RoHS, TÜV mark
Weight & dimensions	
Dimensions (WxDxH)	88 x 87 x 51 mm
Weight	165 g
Width	88 mm
Depth	87 mm
Height	51 mm
Packaging data	
Quantity per pack	1 pc(s)
Package width	95 mm

Package depth	125 mm
Package height	55 mm
Package weight	203 g
Package volume	100 cm ³
Package type	Polybag
Logistics data	
Country of origin	Taiwan