
APC Back-UPS PRO BR900MI - 6x C13 output, USB, 900VA

Gamintojas: **APC** · Modelis: **BR900MI** · EAN: **731304346944** · Prekės kodas: **675168**

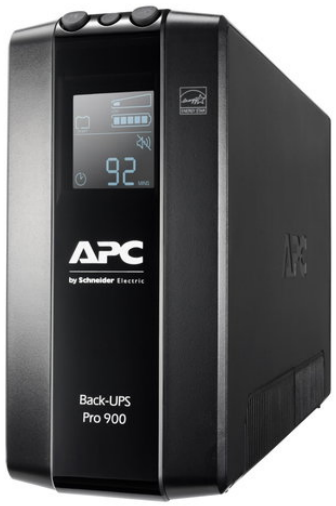

281.91€

Kaina su PVM


Be PVM: **232.98€**

In Stock

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ High Performance Computer and Electronics UPS for Premium Power Protection
- ✓ Includes: USB cable, User Manual











Aprašymas

Security through emergency power

The APC Back-UPS PRO BR900MI has a built-in battery that ensures that all connected equipment, such as a PC, NAS, router, modem and media box, continues to work if the power goes out. In addition, this APC emergency power supply can also automatically shut down a NAS or PC in time via the USB connection. Useful when the APC ups is almost empty. This prevents downtime, damage to equipment, and loss of data.

Safety and convenience

In addition, this safe APC Back-UPS PRO protects valuable equipment against peak voltage caused by lightning strikes, for example. With these UPS you can secure both your power and network connections (1Gbit). Because the APC Back-UPS PRO is also equipped with an LCD screen, it is easy to use.

Insurance

Despite the high risk of lightning strikes and surges, APC has full confidence in its products and offers this APC Back-UPS:
- Equipment protection policy of 150,000 euros

Extend the lifespan

The internal battery cartridge (APCRBC164) can be replaced easily, safely and independently by the user. This without having to switch off the APC BR900MI or connected equipment. This way you can easily and cheaply extend the lifespan of the APC Back-UPS.

Warranty extension

The factory warranty of the BR900MI is 3 years and can be upgraded to 6 years with the APC service pack (WBEXTWAR3YR-SP-01).

Save on operational costs

The BR900MI features a customizable AVR, which extends battery life and maximizes runtime by correcting low and high voltages without discharging the battery. In addition, the UPS has Greenmode, a smart power-saving operating mode that optimally combines efficiency and protection. Furthermore, the emergency power supply has 6 Battery+surge protected outputs. PowerChute Serial Shutdown software and a USB cable are also included.

Techninė specifikacija

Features	
UPS topology	Line-Interactive
Output power capacity	0.9 kVA
Output power	540 W
Waveform	Sine
Input operation voltage (min)	176 V
Input operation voltage (max)	294 V
Input frequency	50/60 Hz
Output frequency	50/60 Hz

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Automatic Voltage Regulation (AVR)	Yes
Maximum current	10 A
Response time	12 ms
ECO mode	Yes
Noise level	45 dB
Surge protection	Yes
Surge protection features	Network
Audible alarm(s)	Yes
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm

Ports & interfaces

AC outlet types	C13 coupler
Power plug	C14 coupler
AC outlets quantity	6 AC outlet(s)
USB port	Yes
Ethernet LAN (RJ-45) ports	2
Cabling technology	10/100/1000Base-T(X)
SmartSlot	No
SmartConnect port	No

Battery

Battery technology	Sealed Lead Acid (VRLA)
Battery life (max)	5 year(s)
Battery recharge time	12 h
Hot-swap battery	Yes
Automatic battery test	Yes
Cold start	Yes

Design

Form factor	Tower
Product colour	Black
Cable length	1.83 m
Cooling type	Passive
Display type	LCD
LED indicators	Yes

Operational conditions

Operating temperature (T-T)	0 - 40 °C

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Non-operating altitude	0 - 15000 m
Certificates	
Certification	A-tick, C-tick, CE, EAC, GS Mark, RCM, TISI
Packaging content	
Cables included	USB cable
Management card included	No
Manual	Yes
Sustainability	
Sustainability certificates	Green Premium
Weight & dimensions	
Width	91 mm
Depth	310 mm
Height	190 mm
Weight	7.1 kg
Packaging data	
Package width	440 mm
Package depth	143 mm
Package height	255 mm
Package weight	8 kg
Logistics data	
Harmonized System (HS) code	85078000
Other features	
Nominal output voltage	230 V
Nominal input voltage	230 V
Matmenys ir svoris	
Matmenys (I × P × A)	44.00cm × 25.00cm × 14.00cm
Svoris	8.18kg

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Dokumentai ir vaizdo įrašai

- User manual
- Product leaflet

Gamintojo ir saugos informacija

MANUFACTURER

Schneider Electric SE
rue Joseph Monier 35, 92500 Rueil Malmaison, FR
se.com

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.