


# AG Neovo 32-Inch 1080P Slim Bezel Digital Signage Display

Gamintojas: **AG NEOVO** · Modelis: **PM322011M0000** · EAN: **4710739597028** · Prekės kodas: **680382**

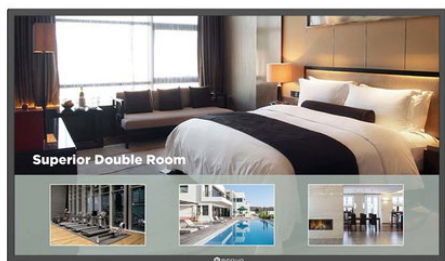

## 625,90 €

Kaina su PVM

Be PVM: **517,27 €**

**Sandėlyje**



**Prekė internetu**

Nuskenaukite kodą arba apsilankykite [www.shopro.lt](http://www.shopro.lt)

## Pagrindinės savybės

- ✓ Full HD 1920 x 1080 resolution
- ✓ 350 nits brightness for indoor public use
- ✓ Built-in USB media playback signage content delivery
- ✓ Extensive display control: RS232, LAN and PID Command & Ctrl software
- ✓ Ideal for 16/7 commercial operation



## Aprašymas

The new PM-3202 32-inch 1080P slim bezel digital signage display is given the easy-to-use content scheduler with USB playback, 1920×1080 Full HD resolution with an Anti-Burn-in™ Technology, 350 nits brightness, and 16/7 operation. The PM-3202 slim bezel display is ideal for digital signage applications in any commercial setting, including restaurants, retail stores, medical offices, corporate meeting areas or hotels.

### FULL HD VISIBILITY FOR COMMERCIAL USE

The PM-3202 slim bezel display combines Full HD 1920×1080 resolution, 350 nits of brightness, and 16/7 commercial operation times to easily deliver business messaging and boost customer engagement.

### INTEGRATED CONTENT SCHEDULER

The built-in integrated scheduler in the OSD menu allows you to easily broadcast content based on different input sources, time, and day by IR remote control.

### EMBEDDED IMAGE ENHANCER

The embedded image enhancer features a 3D Deinterlace and Noise Reduction to solve image issues – offering crystal clarity to the most demanding environments.

### BLACK-LEVEL ALIGNMENT

Black-level setting – easily adjust the level of brightness from the dark area of the images by remote control.

### PATENTED ANTI-BURN-IN TECHNOLOGY

To combat the effects of traditional LCD burn-in or ghosting, AG Neovo utilises its patented Anti-Burn-in™ Technology to prevent image burn-in and assure the extended life span for displays.

### VERSATILE CONNECTIVITY FOR MULTIMEDIA PLAYBACK

This 32-inch slim bezel digital signage display integrates diverse connectivity, including HDMI, VGA, RS232, RJ45 to connect external devices. In addition, the display supports USB playback functionality and users can directly playback multimedia content via a LAN connection.

### FREE PID COMMAND & CTRL SOFTWARE

PID Command & Ctrl provides intuitive user interfaces for remote management via laptops and mobile devices and offers easy creation on video wall displays. The software also has simple colour calibration, temperature check, IR/key locking options, and time on usage monitoring for daily maintenance.

## Techninė specifikacija

| Specifications            |                                                |
|---------------------------|------------------------------------------------|
| Sandėlio grupė            | Peripherals & Desktop > Monitors [+2277][-565] |
| Display                   |                                                |
| Display diagonal          | 80 cm (31.5")                                  |
| Display technology        | LCD                                            |
| Display resolution        | 1920 x 1080 pixels                             |
| Display brightness        | 350 cd/m²                                      |
| HD type                   | Full HD                                        |
| Touchscreen               | No                                             |
| Panel type                | VA                                             |
| LED backlight             | Yes                                            |
| Response time             | 5 ms                                           |
| Contrast ratio (typical)  | 4000:1                                         |
| Viewing angle, horizontal | 178°                                           |
| Viewing angle, vertical   | 178°                                           |
| Display number of colours | 16.7 million colours                           |
| Pixel pitch               | 0.364 x 0.364 mm                               |
| Horizontal scan range     | 28 - 92 kHz                                    |
| Vertical scan range       | 48 - 85 Hz                                     |
| Haze rate                 | 2%                                             |

|                               |                            |
|-------------------------------|----------------------------|
| Surface hardness              | 3H                         |
| <b>Ports &amp; interfaces</b> |                            |
| HDMI ports quantity           | 3                          |
| DVI port                      | No                         |
| DisplayPorts quantity         | 0                          |
| USB port                      | Yes                        |
| HDMI version                  | 2                          |
| HDMI input ports quantity     | 3                          |
| VGA (D-Sub) input ports       | 1                          |
| USB ports quantity            | 1                          |
| USB version                   | 2                          |
| Ethernet LAN (RJ-45) ports    | 1                          |
| Audio (L/R) out               | 1                          |
| PC Audio in                   | Yes                        |
| Microphone in                 | Yes                        |
| RS-232 interface              | Yes                        |
| Remote (IR) output            | 1                          |
| <b>Audio</b>                  |                            |
| Built-in speaker(s)           | Yes                        |
| Number of built-in speakers   | 2                          |
| RMS rated power               | 20 W                       |
| <b>Design</b>                 |                            |
| Product design                | Digital signage flat panel |
| Product colour                | Black                      |
| Placement supported           | Indoor                     |
| VESA mounting                 | Yes                        |
| Orientation                   | Vertical                   |
| Panel mounting interface      | 100 x 100,200 x 200 mm     |
| Anti-glare screen             | Yes                        |
| <b>Performance</b>            |                            |
| Purpose                       | Universal                  |
| On Screen Display (OSD)       | Yes                        |
| Operating hours (hours/days)  | 16/7                       |
| <b>Power</b>                  |                            |

|                                         |             |
|-----------------------------------------|-------------|
| Power consumption (typical)             | 42 W        |
| Power consumption (standby)             | 0.5 W       |
| Power consumption (off)                 | 0.3 W       |
| Energy efficiency class (SDR)           | G           |
| Energy consumption (SDR) per 1000 hours | 42 kWh      |
| AC input voltage                        | 100 - 240 V |
| AC input frequency                      | 50 - 60 Hz  |

#### Computer system

|                    |    |
|--------------------|----|
| Computer system    | No |
| Built-in processor | No |

#### Weight & dimensions

|                |          |
|----------------|----------|
| Display width  | 726.5 mm |
| Display depth  | 65.1 mm  |
| Display height | 425.4 mm |
| Display weight | 5.7 kg   |

#### Packaging data

|                |        |
|----------------|--------|
| Package width  | 818 mm |
| Package depth  | 139 mm |
| Package height | 547 mm |
| Package weight | 7.8 kg |

#### Packaging content

|                         |          |
|-------------------------|----------|
| Remote control included | Yes      |
| Batteries included      | Yes      |
| Power adapter included  | Yes      |
| Cables included         | AC, HDMI |

#### Operational conditions

|                                   |             |
|-----------------------------------|-------------|
| Operating temperature (T-T)       | 0 - 40 °C   |
| Operating relative humidity (H-H) | 20 - 80%    |
| Storage temperature (T-T)         | -20 - 60 °C |
| Storage relative humidity (H-H)   | 10 - 90%    |

#### Certificates

|               |                                                                |
|---------------|----------------------------------------------------------------|
| Certification | FCC, CE, LVD, UKCA, WEEE, RoHS, REACH, EAC, ICES-003 (Issue 7) |
|---------------|----------------------------------------------------------------|

#### Network

|              |     |
|--------------|-----|
| Ethernet LAN | Yes |
|--------------|-----|

|                         |                             |
|-------------------------|-----------------------------|
| Wi-Fi                   | No                          |
| Ethernet LAN data rates | 10,100,1000 Mbit/s          |
| Other features          |                             |
| Noise reduction         | Yes                         |
| Quick start guide       | Yes                         |
| RS-232 input ports      | 1                           |
| Matmenys ir svoris      |                             |
| Matmenys (I × P × A)    | 14,00cm × 81,00cm × 54,00cm |