

TP-Link Archer BE9300 Wi-Fi 7 Bluetooth 5.4 PCIe Adapter

Gamintojas: **TP-LINK** · Modelis: **ARCHER TBE550E** · EAN: **4895252507836** · Prekės kodas: **683081**



96,90 €

Kaina su PVM

Be PVM: **80,08 €**

Sandėlyje





Prekė internetu

Nuskuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ Unparalleled Tri-Band Speed — Boost your overall speeds up to 5760 Mbps (6 GHz) + 2880 Mbps (5 GHz) + 688 Mbps (2.4 GHz)
- ✓ WiFi 7 Standard — Unleash the full potential of the 6 GHz band to double the bandwidth of the last generation
- ✓ Wider Signal Coverage — Two multi-directional antennas with a magnetized base are designed for optimal signal reception
- ✓ Reliable Bluetooth 5.4 — Security and reliability improvement than last-gen high-speed Bluetooth 5.3
- ✓ Improved Security — The latest security enhancement, WPA3, provides enhanced protection in personal password safety
- ✓ Fast Installation with USB Drive — Plug in the resource USB drive provided with Archer TBE550E to quickly drive without network. Enjoy the simple and friendly adapter installation
- ✓ Multicolor Wi-Fi Status Lighting — Equipped with vibrant LED lighting effects, the base provides an intuitive indication of network status, enhancing both functionality and aesthetics
- ✓ Supported Operating System — Windows 11(64-bit) only

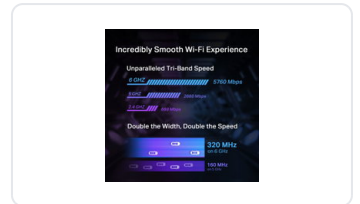

Aprašymas

BE9300 Wi-Fi 7 Bluetooth 5.4 PCIe Adapter

Supercharge Your Desktop with Wi-Fi 7

BE9300 Wi-Fi 7 Bluetooth 5.4 PCIe Adapter

Unrivaled Wi-Fi 7 Technology

Wi-Fi 7 unlocks the full potential of the 6 GHz band, doubling the last generation's bandwidth. TBE550E delivers astonishing wireless speeds and flexible bandwidth combine, facilitating instant multi-stream media playback. Install, connect, and enjoy astonishing wireless speeds.

Maximized Coverage with Flexible Antenna Placement

Archer TBE550E has two multi-directional and high-performance antennas with a magnetized base. Place the antenna base anywhere on your desktop to find the optimal location for signal reception.

Intuitive Wi-Fi Status via Immersive Lighting

With captivating LED lighting effects, the base of Archer TBE550E not only offers an intuitive display of network status but also allows for effortless customization through its responsive touch switch.

Reliable Bluetooth 5.4

Bluetooth 5.4 Building upon the high-speed and wide-range capabilities of its predecessor, the updated Bluetooth 5.4 offers enhanced reliability and security, ensuring seamless interoperability with game controllers, headphones, keyboards, and more.

Refined Security

The latest Wi-Fi security protocol, WPA3, brings new capabilities to improve cybersecurity. More secure encryption in Wi-Fi password safety and enhanced protection against brute-force attacks combine to safeguard your home Wi-Fi.

Fast Installation via USB Drive

Easily set up your Archer TBE550E using the included USB drive—even without network connection. Experience a straightforward and user-friendly installation process.

Techninė specifikacija

Specifications	
Sandėlio grupė	Network & Smart Home - Network - Accesspoints & Controllers [+31][-243]
Ports & interfaces	
Connectivity technology	Wireless
Host interface	PCI Express
Interface	WLAN / Bluetooth
Network	
Maximum data transfer rate	9300 Mbit/s
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11be, IEEE 802.11g, IEEE 802.11n
Wi-Fi	Yes
Wi-Fi band	Tri-band (2.4 GHz / 5 GHz / 6 GHz)
Top Wi-Fi standard	Wi-Fi 7 (802.11be)
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax), Wi-Fi 6E (802.11ax), Wi-Fi 7 (802.11be)
Security algorithms	WPA, WPA-PSK, WPA2, WPA2-PSK, WPA3
Design	
Internal	Yes

Component for	PC
Product colour	Black
Antenna	Yes
Antenna design	External
LED indicators	Yes
Receiver sensitivity	6 GHz: 11ax HE20 MCS0: -94 dBm; 11be EHT320 MCS13: -44dBm; 5 GHz: 11ac VHT20 MCS0: -94 dBm; 11be EHT160 MCS13: -48dBm; 2.4 GHz: 11n HT20 MSC0: -95 dBm; 11be EHT40 MSC13: -56dBm
Certification	FCC/CE/IC/NCC/JRF/VCCI/BSMI
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	10 - 90%
Storage relative humidity (H-H)	5 - 90%
Weight & dimensions	
Width	95.2 mm
Depth	120.8 mm
Height	21.5 mm
Packaging content	
Quick installation guide	Yes
Matmenys ir svoris	
Matmenys (I × P × A)	25,00cm × 22,00cm × 4,00cm
Svoris	0,62kg