iiyama T4329AS-B1AG computer monitor 108 cm (42.5") 3840 x 2160 pixels 4K Ultra HD LED Touchscreen Black

Gamintojas: **IIYAMA** · Modelis: **T4329AS-B1AG** · EAN: **4948570125579** · Prekės kodas: **687003**



1,311.89€

Kaina su PVM

Be PVM: **1,084.21€**

In Stock

Prekė internetu
Nuskenuokite kodą arba apsilankykite www.shopro.lt

Pagrindinės savybės

- ✓ 108 cm (42.5") Black
- ✓ Built-in speaker(s)
- ✓ HDMI version: 1.4/2.0
- ✓ Screen shape: Flat
- ✓ Response time: 6.5 ms Response time measurement type: GTG (Gray to Gray)
- ✓ 3840 x 2160 pixels 4K Ultra HD Panel type: VA
- ✓ Energy efficiency class (SDR): G ErP CB, CE, cTUVus, EAC, REACH, RoHS, TÜV mark, UKCA, WEEE













Aprašymas

The ProLite T4329AS-B1AG is a 43" all-in-one PCAP touchscreen display built for the evolving needs of modern workspaces, especially huddle spaces where creativity, flexibility, and seamless sharing take center stage. Powered by Android OS, this interactive display delivers a user-friendly and highly adaptable experience. You can install your preferred apps directly on the device, enabling customized workflows tailored to your environment — whether in a collaborative meeting area, an enterprise innovation hub, or an educational breakout room. The USB-C loop-through feature simplifies connectivity by allowing multiple displays to be easily daisy-chained while transmitting power, data, and video — all through a single cable. This reduces cable clutter and setup time, making it ideal for dynamic workspaces. The included wall mounting bracket makes installation straightforward and secure. With iiSignage2 (CMS), iiControl (DMS), and iiShare (Wireless Presentation) you gain full control over content and messaging, even remotely — perfect for updating shared information or branded visuals on the fly. The integrated EShare app brings wireless screen sharing and collaboration to life, supporting multi-user interaction and real-time ideation. The T4329AS-B1AG isn’t just a display — it’s a collaboration tool designed to empower teams, streamline communication, and make every meeting count.

Techninė specifikacija

Display	
Display diagonal	108 cm (42.5")
Display resolution	3840 x 2160 pixels
Native aspect ratio	16:9
Display technology	LED
Touchscreen	Yes
HD type	4K Ultra HD
Panel type	VA
Response time	6.5 ms
Screen shape	Flat
Contrast ratio (typical)	4000:1
Display number of colours	1.07 billion colours
LED backlight	Yes
Backlight type	Direct LED
Touchscreen technology	Projected capacitive system
Touch technology	Multi-touch
Number of simultaneous touchpoints	20
Display brightness (typical)	500 cd/m²
Display brightness	420 cd/m²
Response time measurement type	GTG (Gray to Gray)

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

www.shopro.lt · info@shopro.lt · +370 693 39903

Anti-glare screen	Yes
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Pixel pitch	0.245 x 0.245 mm
Horizontal scan range	28 - 160 kHz
Viewable size, horizontal	94.1 cm
Viewable size, vertical	52.9 cm
Display diagonal (metric)	108 cm
Surface hardness	8
NTSC coverage (typical)	72%
Performance	
Operating hours (hours/days)	24/7
Operating system installed	Android
Operating system version	14
Palm rejection	Yes
Multimedia	
Built-in speaker(s)	Yes
Number of speakers	2
RMS rated power	20 W
Design	
Product colour	Black
Front bezel colour	Black
Glass thickness	3.7 mm
Ports & interfaces	
USB version	2
USB Type-C DisplayPort Alternate Mode	Yes
USB Power Delivery (USB PD)	Yes
USB Power Delivery up to	15 W
USB Touch port	Yes
DVI port	No
HDMI ports quantity	2
HDMI version	1.4/2.0
HDCP	Yes
HDCP version	1.4/2.2

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

RS-232C	Yes
Network	
Wi-Fi	Yes
Wi-Fi standards	Wi-Fi 5 (802.11ac)
Ethernet LAN	Yes
Ergonomics	
VESA mounting	Yes
Panel mounting interface	300 x 300 mm
On Screen Display (OSD)	Yes
On Screen Display (OSD) languages	German, English, Spanish, French, Japanese, Dutch, Polish, Russian
Number of OSD languages	8
Power	
Energy efficiency class (SDR)	G
Energy efficiency class (HDR)	Not available
Energy consumption (SDR) per 1000 hours	98 kWh
Power consumption (typical)	98 W
Power consumption (standby)	0.5 W
Power consumption (off)	0.3 W
AC input voltage	100 - 240 V
AC input frequency	50/60 Hz
Power supply type	Internal
Energy efficiency scale	A to G
Operational conditions	
Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	-20 - 60%
Weight & dimensions	
Width (with stand)	989.6 mm
Depth (with stand)	72.8 mm
Height (with stand)	577.8 mm
Weight (with stand)	13.7 kg
Packaging data	
Package width	1115 mm
Package depth	144 mm
Package height	730 mm

Pateikta prekės informacija yra orientacinio pobūdžio. Techninės savybės, nuotraukos, aprašymai ir kaina gali keistis be išankstinio perspėjimo. Gamintojas ir pardavėjas neatsako už galimus duomenų neatitikimus ar tipografines klaidas. Prieš įsigyjant rekomenduojame pasitikrinti aktualią informaciją.

Package weight	17.6 kg
Packaging content	
Cables included	AC, HDMI, RS-232
Remote control included	Yes
Quick start guide	Yes
HDMI cable length	1.8 m
Power cable length	1.8 m
Batteries included	Yes
Remote control batteries included	Yes
Sustainability	
Sustainability certificates	ErP
Other features	
Compatible operating systems	All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section.
Positional accuracy	2.5 mm
Placement supported	Indoor
Brightness	420 cd/m²
Packaging content	Wall Mounting Bracket (VESA 300x300), Magnetic holding places for Touch pens (on sides in landscape)
Built-in processor	Yes
Active display area (W x H)	941.2 x 529.4 mm
USB ports quantity	2
Weight	13.7 kg
Height	577.8 mm
Width	989.6 mm
Depth	72.8 mm
Compliance certificates	CB, CE, cTUVus, EAC, REACH, RoHS, TÜV mark, UKCA, WEEE
Mean time between failures (MTBF)	50000 h
Ethernet LAN (RJ-45) ports	1
Certification	CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH, UKCA, cTUVus

User controls	picture (brightness, contrast, sharpness, black level, tint, colour, noice reduction, gamma selection, low blue light, color temp., color control, picture reset), audio (balance, treble, bass,volume, audio out, max. volume, min. volume, mute, speakers setting audio reset), OSD setting (OSD timeout, OSD H position, OSD V position, OSD transparency, information OSD, side bar), general (logo and animation, wallpaper, no signal image, schedule, off timer), screen (zoom mode, custom zoom, system rotation, scree reset), device (power on status, RS232 routing, IR control, Physical button, motorized stand, power saving, panel saving, monitor info, Touch lock, other), system (language, system update, settng reset, factory reset, Android setting), admin (menu lock, meeting lock, HDMI CEC, kiosk mode, screen share, Miracast standby, log export)
Touch method	stylus, finger
Control panel	Power (long press for Quick Menu (source, volume +, volume -, brightness +, brightness -, Touch unlock)


Thin Client

Processor architecture	ARM Cortex-A73
Processor cores	4

Matmenys ir svoris

Matmenys (I × P × A)	111.00cm × 72.00cm × 14.00cm

Energijos efektyvumas ir ekologinis projektavimas

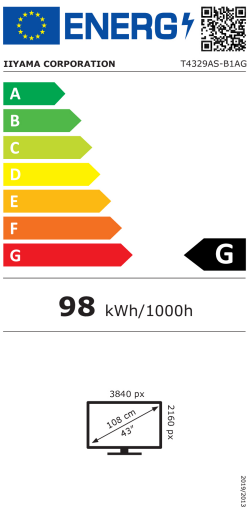

Energijos efektyvumo klasė G A–G

- Energijos etiketė
- Gaminio informacijos lapas
- EPREL duomenų bazė

Dokumentai ir vaizdo įrašai

- User manual
- Product leaflet
- Vaizdo įrašas 1 objects.icecat.biz/objects/130025424_67163593.mp4
- Vaizdo įrašas 2 objects.icecat.biz/objects/130025424_67163597.mp4
- Vaizdo įrašas 3 objects.icecat.biz/objects/130025424_67163594.mp4
- Vaizdo įrašas 4 objects.icecat.biz/objects/130025424_67163598.mp4
- Vaizdo įrašas 5 objects.icecat.biz/objects/130025424_67163596.mp4
- Vaizdo įrašas 6 objects.icecat.biz/objects/130025424_67163595.mp4

Gamintojo ir saugos informacija

MANUFACTURER

iiyama International
Wijkermeerstraat 8, 2131 HA Hoofddorp, NL
iiyama.com

DISTRIBUTOR

MB KOMPIUTERIŲ GURU
V. Nagevičiaus g. 3, LT-08237 Vilnius
info@shopro.lt